

1601976

https://www.phoenixcontact.com/us/products/1601976

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



M23, Cable connector, series: RC, straight plastic-sheathed, shielded: yes, Screw locking mechanism, No. of pos.: 17, Direction of rotation: Standard, contact connection type: Socket, Solder cup, cable diameter range: 5.5 mm ... 6.5 mm, coding: N

Commercial data

Item number	1601976
Packing unit	20 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Product key	ABRAFA
GTIN	4046356237550
Weight per piece (including packing)	46.71 g
Weight per piece (excluding packing)	43.84 g
Country of origin	DE



1601976

https://www.phoenixcontact.com/us/products/1601976

Technical data

Product properties

Product type	Circular connector (cable-side)

Connector

Insulating body

Coding	N
Contact material	CuZn
Contact surface material	Ni/Au
Insertion/withdrawal cycles	50
Connection method	Solder cup
Contact switching type	Socket
Application	Signal
Number of positions	17
Direction of rotation	Standard
Connection profile	17
Number Contact (Contact group 1)	17
Diameter Contact (Contact group 1)	1 mm
Litz wire cross-section min. Contact (Contact group 1)	0.08 mm²
Litz wire cross-section max. Contact (Contact group 1)	1 mm²
Rated current Contact (Contact group 1)	8 A (for max. connection cross section)
Rated voltage Contact (Contact group 1)	48 V AC
	74 V DC
Rated surge voltage	1.5 kV
Overvoltage category	III
Degree of pollution	3

Housing

Thread type	M23
Type of locking	Screw locking mechanism
Pg screw connection	none
Housing material	GD-Zn
Degree of protection (plugged in)	IP67

Seal

External cable diameter	5.5 mm 6.5 mm
-------------------------	---------------




https://www.phoenixcontact.com/us/products/1601976



Drawings

Schematic diagram

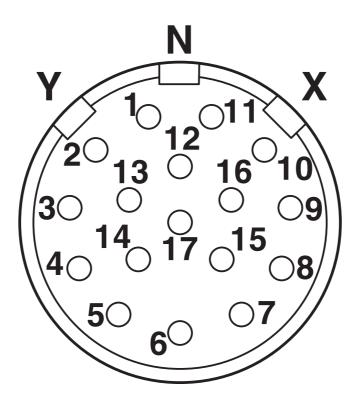


Connector pin assignment



https://www.phoenixcontact.com/us/products/1601976



Schematic diagram

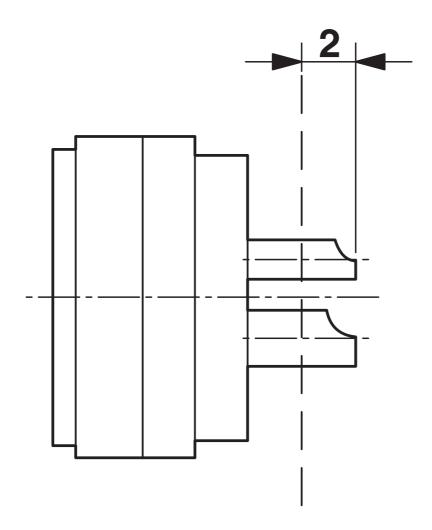

Dimensional drawing



1601976

https://www.phoenixcontact.com/us/products/1601976

Classifications

ETIM 8.0	EC002635
UNSPSC	
UNSPSC 21.0	39121400



1601976

https://www.phoenixcontact.com/us/products/1601976

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)

Phoenix Contact 2025 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com