

# MINI MCR-SL-CVS-24-5-10-NC - Constant voltage source



2902822

<https://www.phoenixcontact.com/us/products/2902822>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Constant voltage source, input voltage 9.6 - 30 V DC, output voltage 10 V, 7.5 V, 5 V, 2.5 V DC, electrically isolated, can be configured via DIP switches, screw connection technology, standard configuration

## Product description

The 6.2 mm wide configurable MINI MCR-SL-CVS-24-10-5 constant voltage source is used to generate high precision constant voltages.

The input voltage can fall between 9.6 V DC and 30 V DC.

The DIP switches accessible from the side of the housing enable configuration of the 10 V DC, 5 V DC, 7.5 V DC, and 2.5 V DC output voltages.

The input voltage can be applied either via connection terminal blocks on the modules or in conjunction with the DIN rail connector.

## Commercial data

Item number	2902822
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	C403
Product key	DK1139
GTIN	4046356682428
Weight per piece (including packing)	87.1 g
Weight per piece (excluding packing)	82.88 g
Customs tariff number	85437090
Country of origin	DE

# MINI MCR-SL-CVS-24-5-10-NC - Constant voltage source



2902822

<https://www.phoenixcontact.com/us/products/2902822>

## Technical data

### Notes

#### Utilization restriction

EMC note	EMC: class A product, see manufacturer's declaration in the download area
----------	---

### Product properties

Product type	Constant voltage source
Product family	MINI Analog
Configuration	DIP switches

#### Insulation characteristics

Overvoltage category	II
Pollution degree	2

### System properties

#### Functionality

Configuration	DIP switches
---------------	--------------

### Electrical properties

Setting range comparison	$\pm 300 \text{ mV}$
Maximum power dissipation for nominal condition	300 mW
Maximum temperature coefficient	$< 0.01 \text{ \%}/\text{K}$
Temperature coefficient, typical	$< 0.002 \text{ \%}/\text{K}$
Maximum transmission error	$\leq 0.1 \text{ \%}$ (of final value)
	$\leq 0.5 \text{ \%}$ (Without adjustment)

#### Electrical isolation Input/output

Rated insulation voltage	50 V AC/DC
Test voltage	1.5 kV AC (50 Hz, 60 s)
Insulation	Basic insulation in accordance with IEC/EN 61010

#### Supply

Nominal supply voltage	24 V DC
Supply voltage range	9.6 V DC ... 30 V DC (The DIN rail connector (ME 6,2 TBUS-2 1,5/5-ST-3,81 GN, item no. 2869728) can be used to bridge the supply voltage. It can be snapped onto a 35 mm DIN rail in accordance with EN 60715)
Max. current consumption	$< 25 \text{ mA}$ (10 V output with 30 mA load at 24 V DC IN)
	$< 65 \text{ mA}$ (10 V output with 30 mA load at 9.6 V DC IN)
	$< 50 \text{ mA}$ (10 V voltage output with 30 mA load at 12 V DC IN)
	$< 20 \text{ mA}$ (10 V voltage output with 30 mA load at 30 V DC IN)
Power consumption	$< 600 \text{ mW}$ (at 24 V IN)
	$< 624 \text{ mW}$ (at 9.6 V IN)

# MINI MCR-SL-CVS-24-5-10-NC - Constant voltage source



2902822

<https://www.phoenixcontact.com/us/products/2902822>

	< 564 mW (At 12 V IN)
	< 540 mW (at 30 V IN)

## Input data

Signal: Voltage

Voltage input signal	9.6 V DC ... 30 V DC
----------------------	----------------------

## Output data

Signal: Voltage

Configurable/programmable	Yes, preconfigured
Max. voltage output signal	10 V DC
	7.5 V DC
	5 V DC
	2.5 V DC
Short-circuit current	approx. 32 mA
Output current	≤ 30 mA
Ripple	< 20 mV <sub>PP</sub>

## Connection data

Connection method	Screw connection
Stripping length	12 mm
Screw thread	M3
Conductor cross section rigid	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section flexible	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section AWG	26 ... 12

## Dimensions

Dimensional drawing	
Width	6.2 mm
Height	93.1 mm
Depth	101.2 mm

## Material specifications

Color	green (RAL 6021)
Housing material	PBT
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 2
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 2
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 2

# MINI MCR-SL-CVS-24-5-10-NC - Constant voltage source



2902822

<https://www.phoenixcontact.com/us/products/2902822>

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-20 °C ... 65 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Altitude	≤ 2000 m
Permissible humidity (operation)	5 % ... 95 % (non-condensing)

## Approvals

### CE

Certificate	CE-compliant
-------------	--------------

### UKCA

Certificate	UKCA-compliant
-------------	----------------

### UL, USA/Canada

Identification	UL 508 Listed
	Class I, Div. 2, Groups A, B, C, D T6
	Class I, Zone 2, Group IIC

### Shipbuilding approval

Certificate	DNV GL TAA00002R0
-------------	-------------------

### Shipbuilding data

Temperature	B
Humidity	B
Vibration	B
EMC	B
Enclosure	Required protection according to the Rules shall be provided upon installation on board

## EMC data

Electromagnetic compatibility	Conformance with EMC directive
Noise immunity	EN 61000-6-2
Note	When being exposed to interference, there may be minimal deviations.

### Noise emission

Standards/regulations	EN 61000-6-4
-----------------------	--------------

### Electrostatic discharge

Standards/regulations	EN 61000-4-2
-----------------------	--------------

### Electrostatic discharge

Comments	Safety measures must be taken to prevent electrostatic discharge.
----------	---

# MINI MCR-SL-CVS-24-5-10-NC - Constant voltage source



2902822

<https://www.phoenixcontact.com/us/products/2902822>

## Electromagnetic HF field

Designation	Electromagnetic RF field
Standards/regulations	EN 61000-4-3
Typical deviation from the measuring range final value	3 %

## Electromagnetic HF field

Comments	Criterion A
----------	-------------

## Fast transients (burst)

Designation	Fast transients (burst)
Standards/regulations	EN 61000-4-4
Typical deviation from the measuring range final value	3 %

## Fast transients (burst)

Comments	Criterion B
----------	-------------

## Surge current load (surge)

Standards/regulations	EN 61000-4-5
-----------------------	--------------

## Surge current load (surge)

Comments	Criterion B
----------	-------------

## Conducted interference

Designation	Conducted interferences
Standards/regulations	EN 61000-4-6
Typical deviation from the measuring range final value	0.5 %

## Conducted interference

Comments	Criterion A
----------	-------------

## Mounting

Mounting type	DIN rail mounting
Assembly note	The DIN rail connector can be used for bridging the supply voltage. It can be snapped onto a 35 mm EN 60715 DIN rail.
Mounting position	any


# MINI MCR-SL-CVS-24-5-10-NC - Constant voltage source



2902822

<https://www.phoenixcontact.com/us/products/2902822>

## Drawings

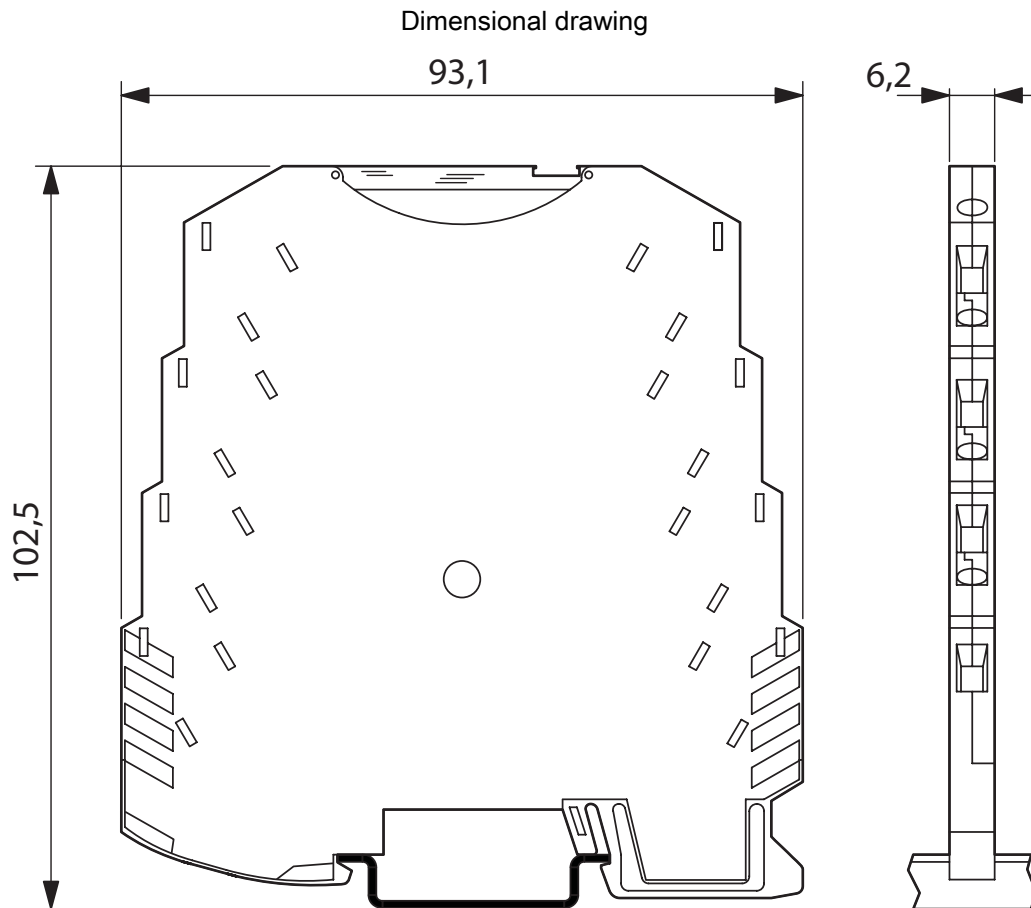


# MINI MCR-SL-CVS-24-5-10-NC - Constant voltage source

2902822

<https://www.phoenixcontact.com/us/products/2902822>

Block diagram

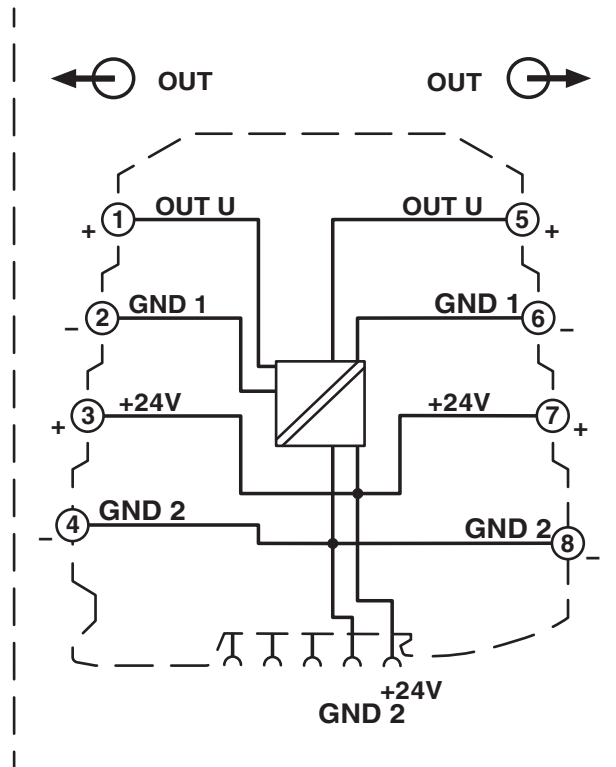

# MINI MCR-SL-CVS-24-5-10-NC - Constant voltage source



2902822

<https://www.phoenixcontact.com/us/products/2902822>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2902822>



**DNV GL**

Approval ID: TAA00002R0



**UL Listed**

Approval ID: E238705



**cUL Listed**

Approval ID: E238705



**cUL Listed**

Approval ID: E199827



**UL Listed**

Approval ID: FILE E 199827



# MINI MCR-SL-CVS-24-5-10-NC - Constant voltage source



2902822  
<https://www.phoenixcontact.com/us/products/2902822>

## Classifications

### ECLASS

ECLASS-13.0	27210192
-------------	----------

### ETIM

ETIM 9.0	EC002498
----------	----------

### UNSPSC

UNSPSC 21.0	39121000
-------------	----------

# MINI MCR-SL-CVS-24-5-10-NC - Constant voltage source



2902822

<https://www.phoenixcontact.com/us/products/2902822>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c), 7(a), 7(c)-I

### China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

### EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	d592cdca-41a8-4f80-85c7-fff7473dbfaa

### EF3.0 Climate Change

CO2e kg	1.187 kg CO2e
---------	---------------

Phoenix Contact 2025 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)