

1603252

https://www.phoenixcontact.com/us/products/1603252

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



M23, Cable connector, straight, Screw locking mechanism, No. of pos.: 16+2+FE, Direction of rotation: Standard, contact connection type: Socket, Crimp connection, coding: N

Commercial data

Item number	1603252
Packing unit	20 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Product key	ABRAFA
GTIN	4046356244442
Weight per piece (including packing)	65.92 g
Weight per piece (excluding packing)	65.92 g
Country of origin	DE



1603252

https://www.phoenixcontact.com/us/products/1603252

Technical data

Notes

	Order information:	Order crimp contacts 16 x Ø 1 mm, 2 x Ø 1.5 mm, 1 x Ø 1.5 (PE) separately		
Product properties				
	Product type	Circular connector (cable-side)		

Connector

Insulating body

Note	Order information: Order crimp contacts 16 x Ø 1 mm, 2 x Ø 1.5 mm, 1 x Ø 1.5 (PE) separately
Coding	N
Material (Insulating body)	PA 6.6
Connection method	Crimp connection
Contact switching type	Socket
Application	Signal
Number of positions	19
Direction of rotation	Standard
Connection profile	16+2+FE
Number Contact (Contact group 1)	3
Diameter Contact (Contact group 1)	1.5 mm
Rated current Contact (Contact group 1)	10 A (for max. connection cross section)
Rated voltage Contact (Contact group 1)	48 V AC
	74 V DC
Rated surge voltage	1.5 kV
Overvoltage category	II
Degree of pollution	3
Number Contact (Contact group 2)	16
Diameter Contact (Contact group 2)	1 mm
Litz wire cross-section min. Contact (Contact group 2)	0.08 mm²
Litz wire cross-section max. Contact (Contact group 2)	1 mm²
Rated current Contact (Contact group 2)	8 A
Overvoltage category	II
Degree of pollution	3

Housing

Note	Order contact inserts separately
Туре	Cable connector housing
Thread type	M23
Design	straight
Type of locking	Screw locking mechanism
Pg screw connection	none



1603252

https://www.phoenixcontact.com/us/products/1603252

Material (Housing)	Metal
Degree of protection (plugged in)	IP65
	IP67
	IP68




https://www.phoenixcontact.com/us/products/1603252



Drawings

Schematic diagram

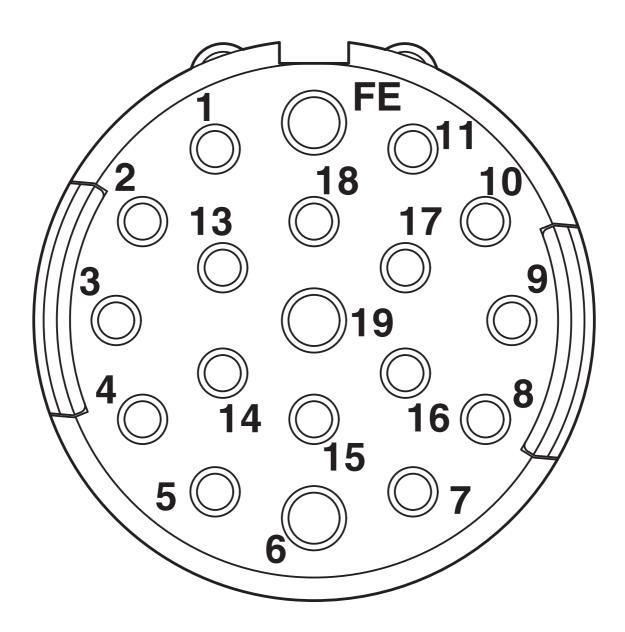

Connector pin assignment



1603252

https://www.phoenixcontact.com/us/products/1603252

Phoenix Contact 2025 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com