


REL-MR- 4,5DC/21AU - Single relay



2961370

<https://www.phoenixcontact.com/us/products/2961370>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Plug-in miniature power relay, with multi-layer gold contact, 1 changeover contact, input voltage 4.5 V DC

Your advantages

- Safe isolation between coil and contact side
- High degree of protection up to RT III depending on type (wash-proof)
- Power contacts up to 6 A

Commercial data

| | |
|--------------------------------------|---------------|
| Item number | 2961370 |
| Packing unit | 10 pc |
| Minimum order quantity | 10 pc |
| Sales key | C460 |
| Product key | DK6922 |
| GTIN | 4017918730857 |
| Weight per piece (including packing) | 6.64 g |
| Weight per piece (excluding packing) | 6.21 g |
| Customs tariff number | 85364900 |
| Country of origin | CN |

REL-MR- 4,5DC/21AU - Single relay



2961370

<https://www.phoenixcontact.com/us/products/2961370>

Technical data

Product properties

| | |
|-------------------------|---------------------------|
| Product type | Single relay |
| Operating mode | 100% operating factor |
| Mechanical service life | 2x 10 ⁷ cycles |

Insulation characteristics

| | |
|----------------------|-----|
| Overvoltage category | III |
| Pollution degree | 3 |

Data management status

| | |
|------------------------------|------------|
| Date of last data management | 11.04.2025 |
|------------------------------|------------|

Electrical properties

| | |
|---|--|
| Maximum power dissipation for nominal condition | 0.17 W |
| Test voltage (Winding/contact) | 4 kV AC (50 Hz, 1 min., winding/contact) |

Input data

Coil side

| | |
|---|------------------------|
| Nominal input voltage U _N | 4.5 V DC |
| Input voltage range | 2.7 V DC ... 12.4 V DC |
| Drive and function | monostable |
| Drive (polarity) | non-polarized |
| Typical input current at U _N | 38 mA |
| Typical response time | 5 ms |
| Typical release time | 2.5 ms |
| Coil resistance | 119 Ω ±10 % (at 20 °C) |

Output data

Switching

| | |
|---------------------------------------|-------------------------|
| Contact switching type | 1 changeover contact |
| Type of switch contact | Single contact |
| Contact material | AgSnO, hard gold-plated |
| Maximum switching voltage | 30 V AC |
| | 36 V DC |
| Minimum switching voltage | 100 mV (at 10 mA) |
| Limiting continuous current | 50 mA |
| Maximum inrush current | on request |
| Min. switching current | 1 mA (at 24 V) |
| Interrupting rating (ohmic load) max. | 1.2 W (at 24 V DC) |

Switching: when the gold layer is destroyed

REL-MR- 4,5DC/21AU - Single relay



2961370

<https://www.phoenixcontact.com/us/products/2961370>

| | |
|---------------------------------------|--|
| Note | the following values are applicable if a gold layer is destroyed |
| Contact material | AgSnO |
| Maximum switching voltage | 250 V AC |
| Minimum switching voltage | 5 V (at 100 mA) |
| Limiting continuous current | 6 A |
| Min. switching current | 10 mA (at 12 V) |
| Interrupting rating (ohmic load) max. | 140 W (at 24 V DC) |
| | 20 W (at 48 V DC) |
| | 18 W (at 60 V DC) |
| | 23 W (at 110 V DC) |
| | 40 W (at 220 V DC) |
| | 1500 VA (for 250 V AC) |
| Switching capacity | 2 A (at 24 V, DC13) |
| | 0.2 A (at 110 V, DC13) |
| | 0.1 A (at 220 V, DC13) |
| | 3 A (at 24 V, AC15) |
| | 3 A (at 120 V, AC15) |
| | 3 A (at 230 V, AC15) |

Connection data

| | |
|-------------------|--------------------------|
| Connection method | Plug / solder connection |
|-------------------|--------------------------|

Dimensions

| | |
|---------------------|-------|
| Dimensional drawing | |
| Width | 5 mm |
| Height | 28 mm |
| Depth | 15 mm |

Material specifications

| | |
|-------|------------------|
| Color | white (RAL 9010) |
|-------|------------------|

Environmental and real-life conditions

Ambient conditions

| | |
|---|------------------|
| Ambient temperature (operation) | -40 °C ... 85 °C |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C |

Approvals

Corrosive gas test

REL-MR- 4,5DC/21AU - Single relay



2961370

<https://www.phoenixcontact.com/us/products/2961370>

| | |
|----------------|----------------------------|
| Identification | ISA-S71.04. G3 Harsh Group |
| | EN 60068-2-60 |



Standards and regulations

| | |
|-----------------------|------------|
| Standards/regulations | IEC 60664 |
| | EN 50178 |
| | EN 61810-1 |

Mounting


| | |
|-------------------|---------------------------|
| Assembly note | in rows with zero spacing |
| Mounting position | any |

Drawings

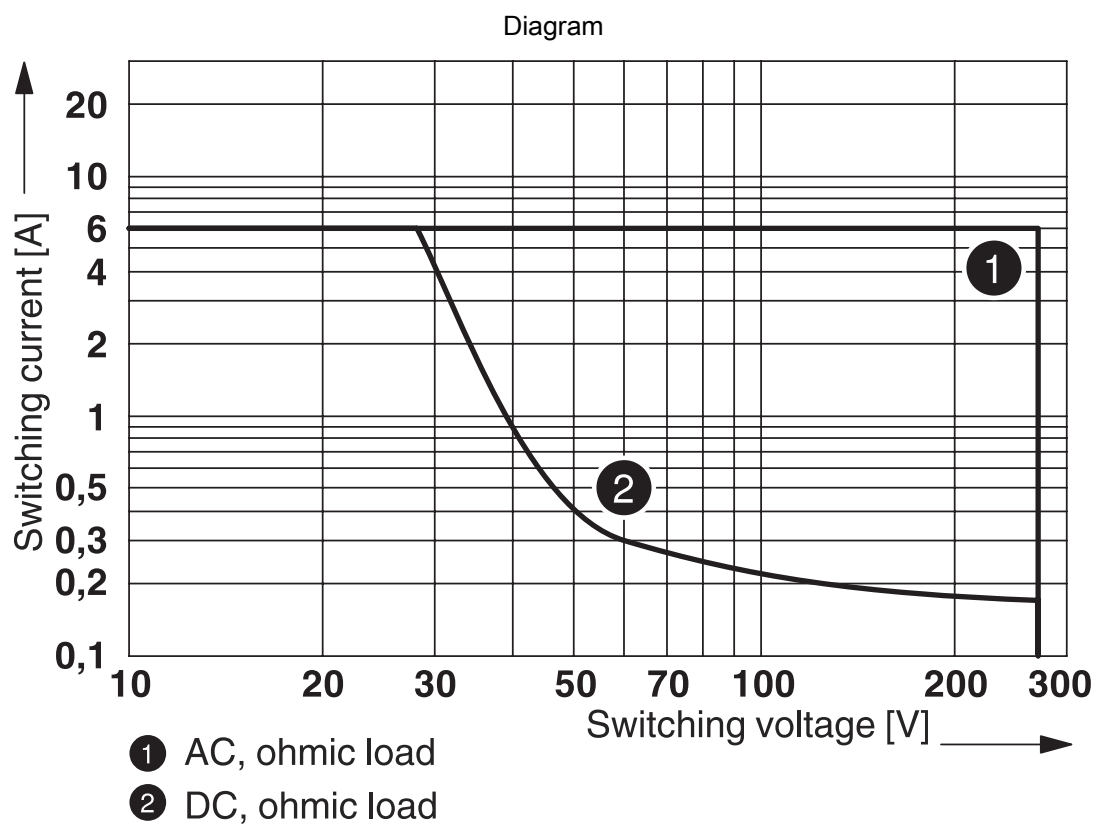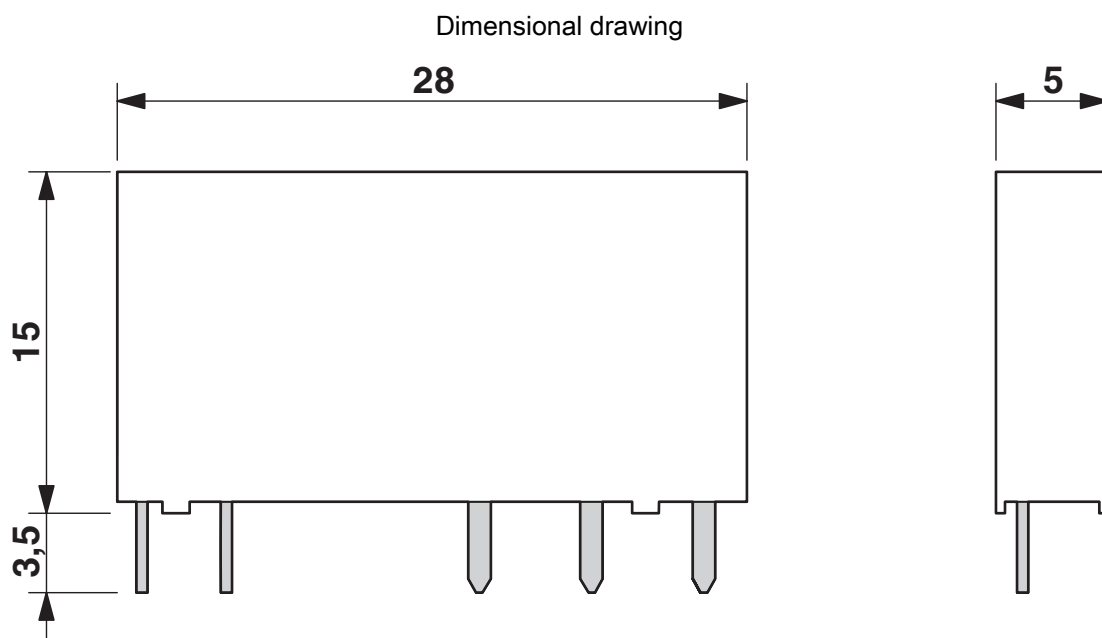

Interrupting rating

Diagram

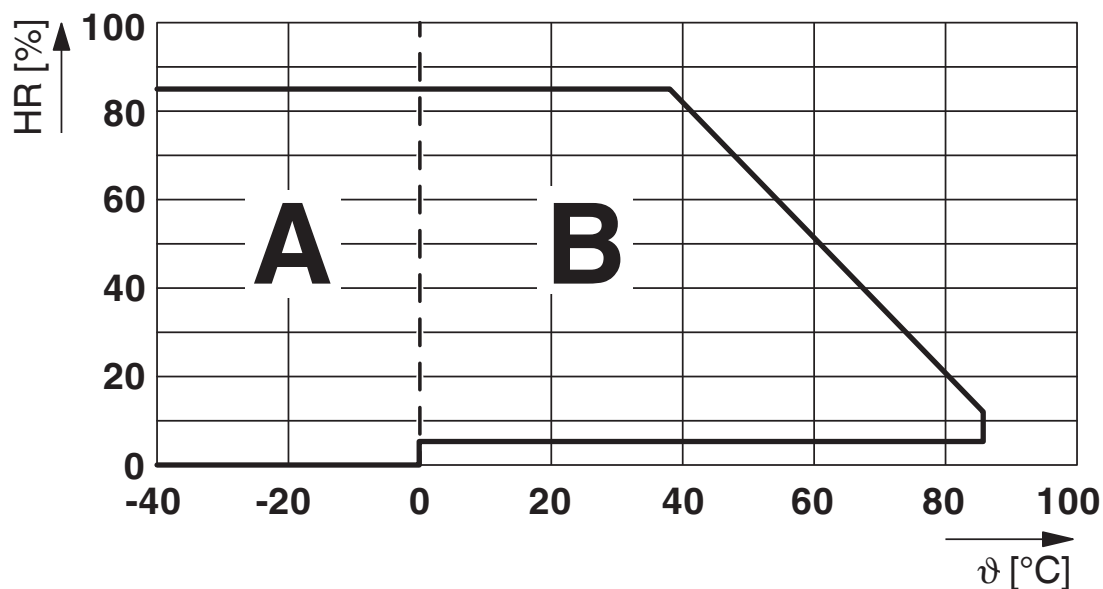

Permissible humidity for operation and storage.


The maximum permissible ambient temperature as specified in the data sheet must be observed.

Area A: Ice buildup at ambient temperatures $\leq 0^{\circ}\text{C}$ must be prevented

Area B: Condensation at ambient temperatures $> 0^{\circ}\text{C}$ must be prevented

On 30 full days that are naturally distributed across an entire year, a humidity level of 95% is permissible at an ambient temperature $\leq 25^{\circ}\text{C}$.

Circuit diagram

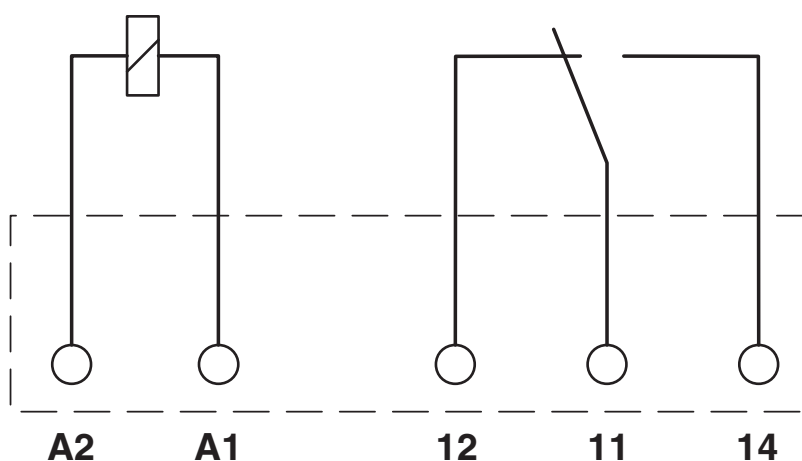


REL-MR- 4,5DC/21AU - Single relay



2961370

<https://www.phoenixcontact.com/us/products/2961370>

Drilling plan/solder pad geometry

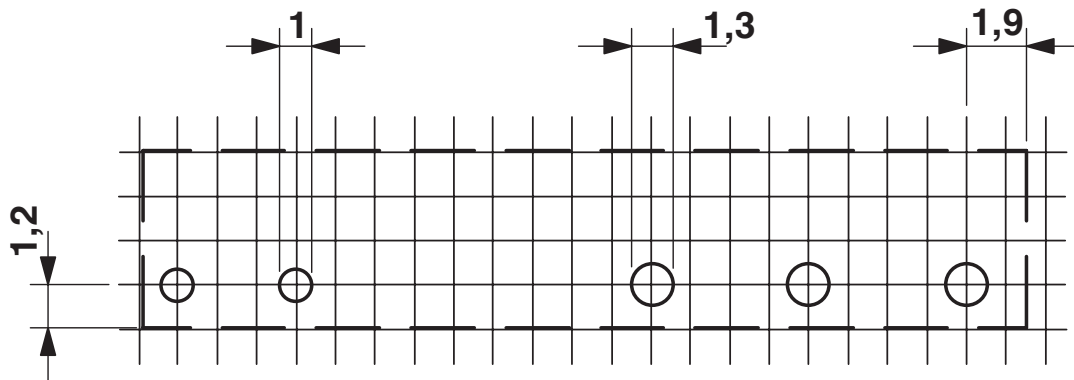

a = pitch division 1.25 mm and 1.27 mm

REL-MR- 4,5DC/21AU - Single relay



2961370

<https://www.phoenixcontact.com/us/products/2961370>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2961370>



cUL Recognized
Approval ID: FILE E 172140



UL Recognized
Approval ID: FILE E 172140



EAC
Approval ID: RU*C-DE.*08.B.00010



UL Recognized
Approval ID: FILE E 172140



VDE approval of drawings
Approval ID: 40032864



VDE approval of drawings
Approval ID: 40054426



cUL Recognized
Approval ID: FILE E 172140



VDE approval of drawings
Approval ID: 40010212



cUL Recognized
Approval ID: FILE E 172140



UL Recognized
Approval ID: FILE E 172140

REL-MR- 4,5DC/21AU - Single relay



2961370

<https://www.phoenixcontact.com/us/products/2961370>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-13.0 | 27371601 |
| ECLASS-15.0 | 27371601 |

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC001437 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39122300 |
|-------------|----------|

REL-MR- 4,5DC/21AU - Single relay



2961370
<https://www.phoenixcontact.com/us/products/2961370>

Environmental product compliance

| | |
|---|--|
| EU RoHS | |
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
| China RoHS | |
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |
| EU REACH SVHC | |
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |

Phoenix Contact 2025 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com