

1606261  
<https://www.phoenixcontact.com/us/products/1606261>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



M23, Rear panel feed-through, series: UC, straight, shielded: yes, Screw locking mechanism, No. of pos.: 8+1, Direction of rotation: Standard, contact connection type: Socket, Crimp connection, Axial O-ring, cable diameter range: 2 mm ... 14.5 mm, coding: N

Commercial data

Item number	1606261
Packing unit	10 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Product key	ABRAIJ
GTIN	4046356258449
Weight per piece (including packing)	120.5 g
Weight per piece (excluding packing)	120.5 g
Country of origin	DE

# UC-09S1N8AQ0DU - Rear panel feed-through



1606261

<https://www.phoenixcontact.com/us/products/1606261>

## Technical data

### Product properties

Product type	Circular connector (cable-side)
--------------	---------------------------------

### Connector

#### Insulating body

Note	Order information: Order crimp contacts 8 x Ø 1 mm, 1 x Ø 2 mm separately
Coding	N
Material (Insulating body)	PA 6.6
Connection method	Crimp connection
Contact switching type	Socket
Application	Signal
Number of positions	9
Direction of rotation	Standard
Connection profile	8+1
Number Contact (Contact group 1)	1
Diameter Contact (Contact group 1)	2 mm
Rated current Contact (Contact group 1)	20 A (for max. connection cross section)
Rated voltage Contact (Contact group 1)	48 V AC
	74 V DC
Rated surge voltage	1.5 kV
Overvoltage category	III
Degree of pollution	3
Number Contact (Contact group 2)	8
Diameter Contact (Contact group 2)	1 mm
Rated current Contact (Contact group 2)	8 A
Rated voltage Contact (Contact group 2)	48 V AC
	48 V AC

#### Housing

Type	Feed-through header
Thread type	M23
Design	straight
Type of locking	Screw locking mechanism
Pg screw connection	none
Mounting type	Rear mounting
Assembly note	Central fastening
Material (Housing)	GD-Zn
Material (Rotating parts)	CuZn
Material (Housing surface)	Ni
Material (Seal)	FPM (O-ring)

# UC-09S1N8AQ0DU - Rear panel feed-through



1606261

<https://www.phoenixcontact.com/us/products/1606261>

Degree of protection (plugged in)	IP67
Seal for the device	Axial O-ring

## Seal

External cable diameter	2 mm ... 14.5 mm
Seal material	NBR

# UC-09S1N8AQ0DU - Rear panel feed-through


1606261

<https://www.phoenixcontact.com/us/products/1606261>




## Drawings

Dimensional drawing

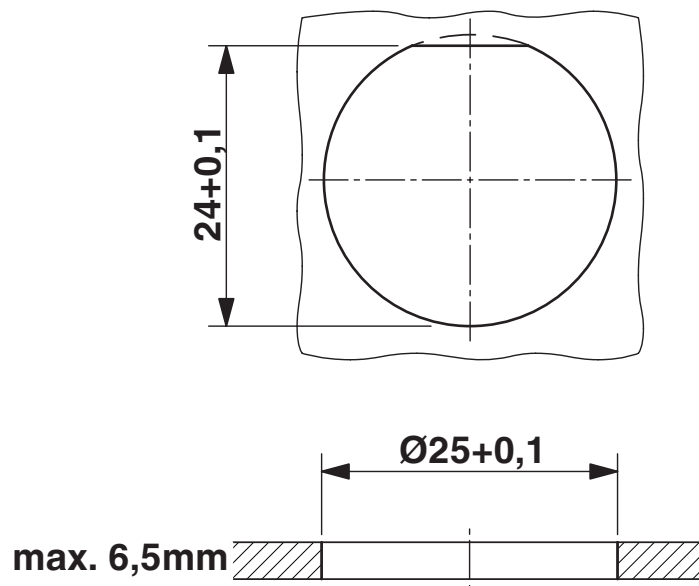

Installation dimensions

Dimensional drawing

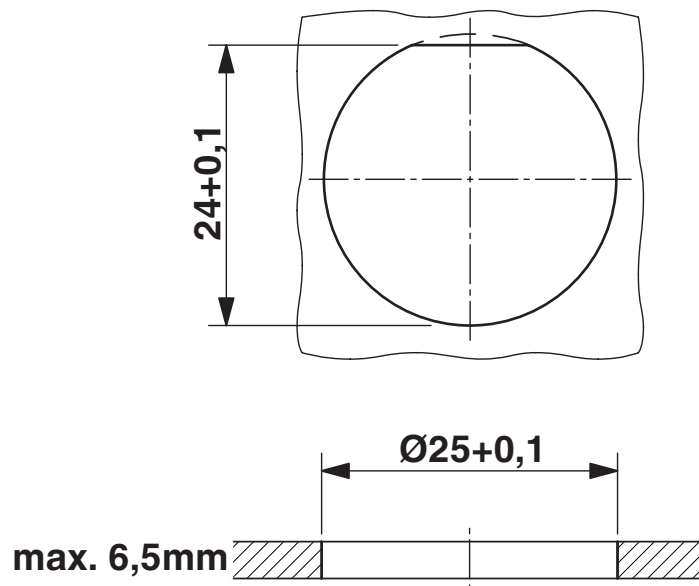

Installation dimensions


# UC-09S1N8AQ0DU - Rear panel feed-through

1606261

<https://www.phoenixcontact.com/us/products/1606261>



Schematic diagram

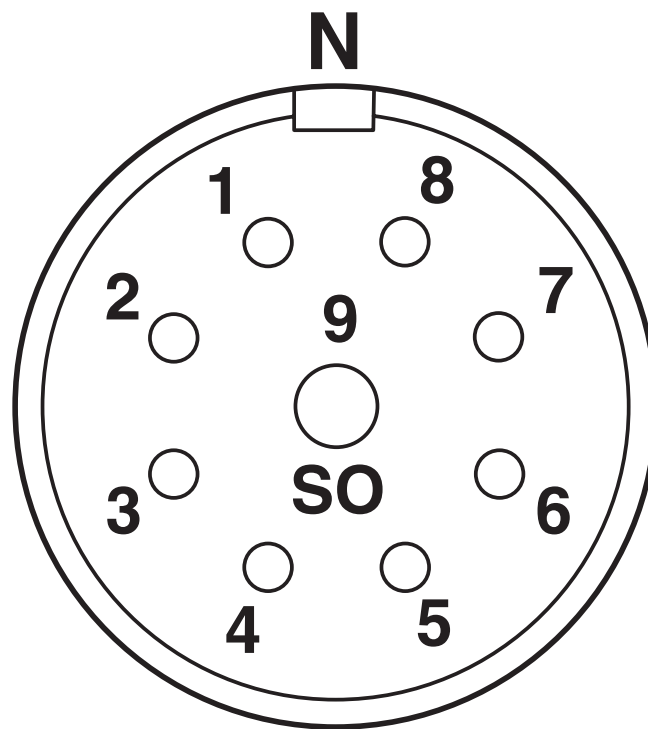

Connector pin assignment


# UC-09S1N8AQ0DU - Rear panel feed-through

1606261

<https://www.phoenixcontact.com/us/products/1606261>



Schematic diagram

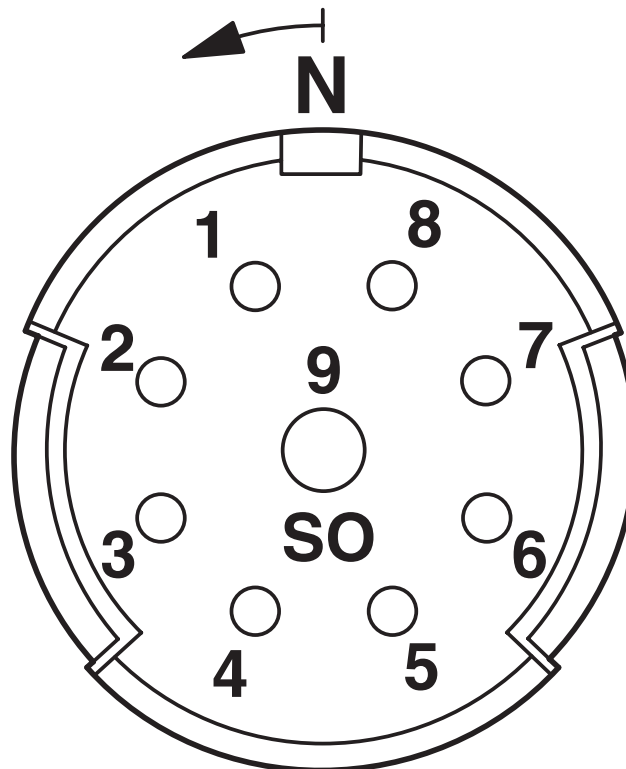


Connector pin assignment

# UC-09S1N8AQ0DU - Rear panel feed-through



1606261

<https://www.phoenixcontact.com/us/products/1606261>

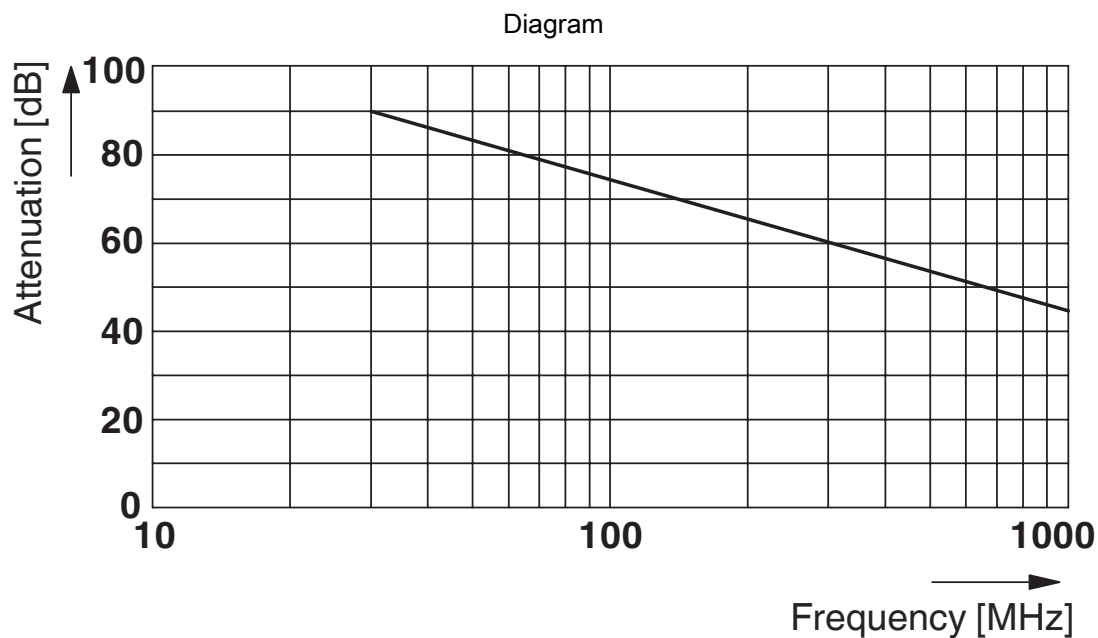

Phoenix Contact 2025 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)