

1627725

https://www.phoenixcontact.com/us/products/1627725

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Cable plug in molded plastic



Commercial data

Item number	1627725
Packing unit	1 pc
Minimum order quantity	20 pc
Note	Made to order (non-returnable)
Product key	ABRDBA
GTIN	4055626347271
Weight per piece (including packing)	1,362.3 g
Weight per piece (excluding packing)	1,362.3 g
Country of origin	DE



1627725

https://www.phoenixcontact.com/us/products/1627725

Technical data

Notes

Notes on operation	Observe derating curve.			
Safety note				
Safety note	WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.			
	 WARNING: Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible. 			
	WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.			
	 The products are suitable for applications in plant, controller, and electrical device engineering. 			
	 When operating the connectors in outdoor applications, they must be separately protected against environmental influences. 			
	 Assembled products may not be manipulated or improperly opened. 			
	 Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products). 			
	 When using the product in direct connection with third-party manufacturers, the user is responsible. 			
	 For operating voltages > 50 V AC, conductive connector housings must be grounded 			
	 Ensure that the protective or functional ground has been properly connected. 			
	VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector			
	Only use tools recommended by Phoenix Contact			
	 The installation notes/Design In documents online on the download page at phoenixcontact.com/products must be observed for this product. 			
	 Operate the connector only when it is fully plugged in and interlocked. 			
	 Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards. 			
	Observe the minimum bending radius of the cable. Lay the cable without twisting it.			
	The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting			



1627725

https://www.phoenixcontact.com/us/products/1627725


		warnings (e.g. DIN EN ISO 13732-1:2008-12).
Product properties		
	Product type	Signal and power cable



1627725

https://www.phoenixcontact.com/us/products/1627725

Drawings

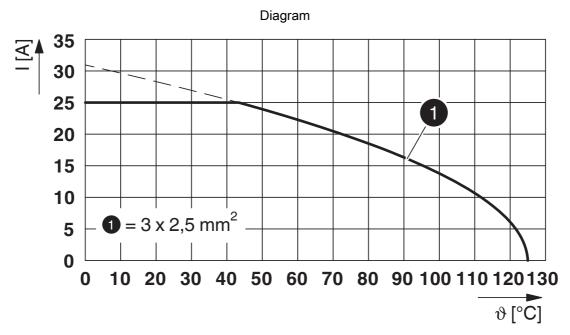

I = current strength, ϑ = ambient temperature, 3x 25 A



1627725

https://www.phoenixcontact.com/us/products/1627725

Classifications

E	CLASS			
	ECLASS-13.0	27060106		
ETIM				
	ETIM 8.0	EC003569		
UNSPSC				
	UNSPSC 21.0	39121400		



1627725

https://www.phoenixcontact.com/us/products/1627725

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(b), 6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: n/a)
SCIP	521003bf-5de1-4635-8dc7-2e8e4a4c6956

Phoenix Contact 2025 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com