


# STTBU 4-PE - Double-level spring-cage terminal block



3033171

<https://www.phoenixcontact.com/us/products/3033171>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Double-level spring-cage terminal block, connection method: Spring-cage connection, cross section: 0.08 mm<sup>2</sup> - 6 mm<sup>2</sup>, connection method: Screw connection, cross section: 0.14 mm<sup>2</sup> - 6 mm<sup>2</sup>, mounting: NS 35/7,5, NS 35/15, color: green-yellow

## Your advantages

- For a clear overview, each terminal point can be labeled
- Can be bridged in both levels to implement different switching tasks
- Can be consistently bridged to the STTB 4 standard double-level terminal blocks

## Commercial data

|                                      |                                |
|--------------------------------------|--------------------------------|
| Item number                          | 3033171                        |
| Packing unit                         | 50 pc                          |
| Minimum order quantity               | 50 pc                          |
| Note                                 | Made to order (non-returnable) |
| Sales key                            | BE02                           |
| Product key                          | BE2129                         |
| GTIN                                 | 4046356148061                  |
| Weight per piece (including packing) | 23.261 g                       |
| Weight per piece (excluding packing) | 23.261 g                       |
| Customs tariff number                | 85369010                       |
| Country of origin                    | PL                             |

# STTBU 4-PE - Double-level spring-cage terminal block



3033171

<https://www.phoenixcontact.com/us/products/3033171>

## Technical data

### Product properties

|                       |                       |
|-----------------------|-----------------------|
| Product type          | Ground terminal block |
| Product family        | STU                   |
| Number of connections | 4                     |
| Number of rows        | 2                     |

### Insulation characteristics

|                      |     |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution  | 3   |

### Electrical properties

|                                                 |        |
|-------------------------------------------------|--------|
| Rated surge voltage                             | 6 kV   |
| Maximum power dissipation for nominal condition | 1.02 W |

### Connection data

|                                 |                   |
|---------------------------------|-------------------|
| Number of connections per level | 2                 |
| Nominal cross section           | 4 mm <sup>2</sup> |

#### Level 1+2 above 1

|                                                                   |                                                    |
|-------------------------------------------------------------------|----------------------------------------------------|
| Connection method                                                 | Spring-cage connection                             |
| Stripping length                                                  | 8 mm ... 10 mm                                     |
| Internal cylindrical gage                                         | A4                                                 |
| Connection in acc. with standard                                  | IEC 60947-7-2                                      |
| Conductor cross-section rigid                                     | 0.08 mm <sup>2</sup> ... 6 mm <sup>2</sup>         |
| Cross section AWG                                                 | 28 ... 10 (converted acc. to IEC)                  |
| Conductor cross-section flexible                                  | 0.08 mm <sup>2</sup> ... 4 mm <sup>2</sup>         |
| Conductor cross-section, flexible [AWG]                           | 28 ... 12 (converted acc. to IEC)                  |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 0.14 mm <sup>2</sup> ... 4 mm <sup>2</sup>         |
| Flexible conductor cross-section (ferrule with plastic sleeve)    | 0.14 mm <sup>2</sup> ... 4 mm <sup>2</sup>         |
| Maximum load current                                              | 36 A (with 6 mm <sup>2</sup> conductor connection) |

#### Level 1+2 below 1

|                                                                   |                                                                |
|-------------------------------------------------------------------|----------------------------------------------------------------|
| Connection method                                                 | Screw connection                                               |
| Screw thread                                                      | M3                                                             |
| Note                                                              | Please observe the current carrying capacity of the DIN rails. |
| Tightening torque                                                 | 0.6 ... 0.8 Nm                                                 |
| Internal cylindrical gage                                         | A4                                                             |
| Connection in acc. with standard                                  | IEC 60947-7-2                                                  |
| Conductor cross-section rigid                                     | 0.14 mm <sup>2</sup> ... 6 mm <sup>2</sup>                     |
| Cross section AWG                                                 | 26 ... 10 (converted acc. to IEC)                              |
| Conductor cross-section flexible                                  | 0.14 mm <sup>2</sup> ... 6 mm <sup>2</sup>                     |
| Conductor cross-section, flexible [AWG]                           | 26 ... 10 (converted acc. to IEC)                              |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 0.14 mm <sup>2</sup> ... 4 mm <sup>2</sup>                     |

# STTBU 4-PE - Double-level spring-cage terminal block



3033171

<https://www.phoenixcontact.com/us/products/3033171>

|                                                                |                                                    |
|----------------------------------------------------------------|----------------------------------------------------|
| Flexible conductor cross-section (ferrule with plastic sleeve) | 0.14 mm <sup>2</sup> ... 4 mm <sup>2</sup>         |
| Nominal current                                                | with 4 mm <sup>2</sup> conductor cross-section     |
| Maximum load current                                           | 36 A (with 6 mm <sup>2</sup> conductor connection) |

## Dimensions

|                    |         |
|--------------------|---------|
| Width              | 6.2 mm  |
| End cover width    | 2.2 mm  |
| Height             | 81 mm   |
| Depth on NS 35/7,5 | 55.5 mm |
| Depth on NS 35/15  | 63 mm   |

## Material specifications

|                                                                         |              |
|-------------------------------------------------------------------------|--------------|
| Color                                                                   | green-yellow |
| Flammability rating according to UL 94                                  | V0           |
| Insulating material group                                               | I            |
| Insulating material                                                     | PA           |
| Static insulating material application in cold                          | -60 °C       |
| Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21)) | 130 °C       |
| Relative insulation material temperature index (Elec., UL 746 B)        | 130 °C       |
| Fire protection for rail vehicles (DIN EN 45545-2) R22                  | HL 1 - HL 3  |
| Fire protection for rail vehicles (DIN EN 45545-2) R23                  | HL 1 - HL 3  |
| Fire protection for rail vehicles (DIN EN 45545-2) R24                  | HL 1 - HL 3  |
| Fire protection for rail vehicles (DIN EN 45545-2) R26                  | HL 1 - HL 3  |
| Calorimetric heat release NFPA 130 (ASTM E 1354)                        | 28 MJ/kg     |
| Surface flammability NFPA 130 (ASTM E 162)                              | passed       |
| Specific optical density of smoke NFPA 130 (ASTM E 662)                 | passed       |
| Smoke gas toxicity NFPA 130 (SMP 800C)                                  | passed       |

## Mechanical properties

### Mechanical data

|                 |     |
|-----------------|-----|
| Open side panel | Yes |
|-----------------|-----|

## Environmental and real-life conditions

### Oscillation/broadband noise

|                        |                                                  |
|------------------------|--------------------------------------------------|
| Specification          | DIN EN 50155 (VDE 0115-200):2008-03              |
| Spectrum               | Long life test category 1, class B, body mounted |
| Frequency              | $f_1 = 5 \text{ Hz}$ to $f_2 = 150 \text{ Hz}$   |
| ASD level              | 1.857 (m/s <sup>2</sup> )/Hz                     |
| Acceleration           | 0.8g                                             |
| Test duration per axis | 5 h                                              |
| Test directions        | X-, Y- and Z-axis                                |
| Result                 | Test passed                                      |

# STTBU 4-PE - Double-level spring-cage terminal block



3033171

<https://www.phoenixcontact.com/us/products/3033171>

## Shocks

|                                |                                     |
|--------------------------------|-------------------------------------|
| Specification                  | DIN EN 50155 (VDE 0115-200):2008-03 |
| Pulse shape                    | Half-sine                           |
| Acceleration                   | 5g                                  |
| Shock duration                 | 30 ms                               |
| Number of shocks per direction | 3                                   |
| Test directions                | X-, Y- and Z-axis (pos. and neg.)   |
| Result                         | Test passed                         |

## Ambient conditions

|                                          |                                                                                                                              |
|------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|
| Ambient temperature (operation)          | -60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.) |
| Ambient temperature (storage/transport)  | -25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)                                                    |
| Ambient temperature (assembly)           | -5 °C ... 70 °C                                                                                                              |
| Ambient temperature (actuation)          | -5 °C ... 70 °C                                                                                                              |
| Permissible humidity (operation)         | 20 % ... 90 %                                                                                                                |
| Permissible humidity (storage/transport) | 30 % ... 70 %                                                                                                                |

## Standards and regulations


|                                  |               |
|----------------------------------|---------------|
| Connection in acc. with standard | IEC 60947-7-2 |
|                                  | IEC 60947-7-2 |

## Mounting

|               |           |
|---------------|-----------|
| Mounting type | NS 35/7,5 |
|               | NS 35/15  |

## Drawings

Circuit diagram

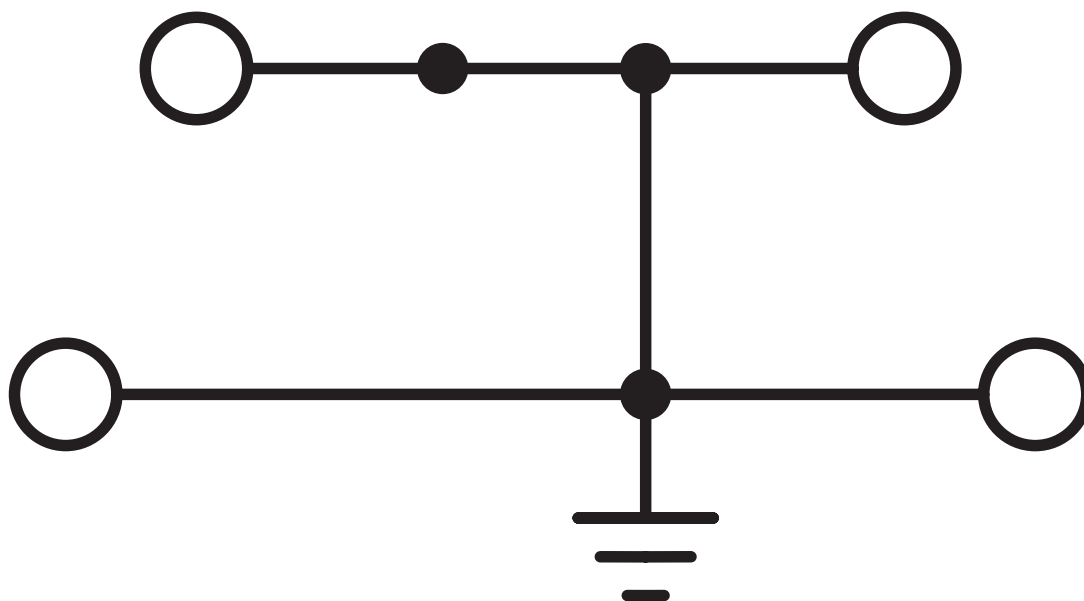

# STTBU 4-PE - Double-level spring-cage terminal block



3033171

<https://www.phoenixcontact.com/us/products/3033171>

## Approvals

🔗 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/3033171>



**EAC**

Approval ID: RU C-DE.BL08.B.00644



**EAC**

Approval ID: KZ7500651131219505

# STTBU 4-PE - Double-level spring-cage terminal block



3033171

<https://www.phoenixcontact.com/us/products/3033171>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-13.0 | 27250104 |
| ECLASS-15.0 | 27250104 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC000901 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

# STTBU 4-PE - Double-level spring-cage terminal block



3033171

<https://www.phoenixcontact.com/us/products/3033171>

## Environmental product compliance

### EU RoHS

|                                         |      |
|-----------------------------------------|------|
| Fulfills EU RoHS substance requirements | Yes  |
| Exemption                               | 6(c) |

### China RoHS

|                                        |                                                                                                                                                                                                                                   |
|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Environment friendly use period (EFUP) | EFUP-50                                                                                                                                                                                                                           |
|                                        | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

### EU REACH SVHC

|                                     |                                      |
|-------------------------------------|--------------------------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1)                 |
| SCIP                                | 5691eacd-3458-4bf6-9064-d162a50652be |

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)