

https://www.phoenixcontact.com/us/products/1519765



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Adapter, 4-position, Plug straight M12, coding: A, on Socket straight M8, coding: A

Commercial data

Item number	1519765
Packing unit	5 pc
Minimum order quantity	1 pc
Sales key	BF10
Product key	AF1GBA
GTIN	4046356019958
Weight per piece (including packing)	13.037 g
Weight per piece (excluding packing)	13.037 g
Customs tariff number	85366990
Country of origin	DE



https://www.phoenixcontact.com/us/products/1519765



Technical data

Product properties

Product type	M8/M12 adapters
Number of positions	4
No. of cable outlets	1
Coding	A
Insulation characteristics	
Overvoltage category	II
Degree of pollution	3

Electrical properties

Insulation resistance	≥ 100 MΩ
Nominal voltage U _N	30 V AC
	30 V DC
Nominal current I _N	4 A

Signaling

Status display	no
Status display present	no

Dimensions

Dimensional drawing	50.5 87 12 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
Width	17 mm
Height	14.8 mm
Length	50.5 mm

Material specifications

Flammability rating according to UL 94	НВ
Seal material	NBR
Material of grip body	TPU, hardly inflammable, self-extinguishing
Contact material	CuSn
Contact surface material	Ni/Au
Contact carrier material	TPU GF
Material for screw connection	Zinc die-cast, nickel-plated

Connector

Connection 1

Туре	Plug straight M12



1519765

https://www.phoenixcontact.com/us/products/1519765

Number of positions	4
Coding type	A
Connection 2	
Туре	Socket straight M8
Number of positions	4
Coding type	A
lechanical properties Mechanical data	
Insertion/withdrawal cycles	≥ 100
Ambient conditions	
Degree of protection	IP65
	IP67
Ambient temperature (operation) (male connector/female connector)	-25 °C 90 °C
tandards and regulations	
Standard designation	M12 connector
Standards/specifications	
	IEC 61076-2-101
Standard designation	IEC 61076-2-101 M8 connector
Standard designation Standards/specifications	


1519765

https://www.phoenixcontact.com/us/products/1519765



Drawings

Dimensional drawing

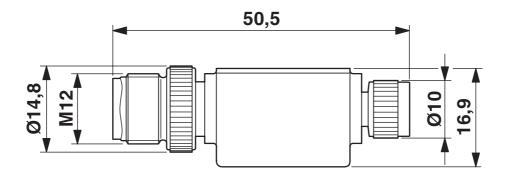


M8/M12 adapter

1519765

https://www.phoenixcontact.com/us/products/1519765



Schematic diagram

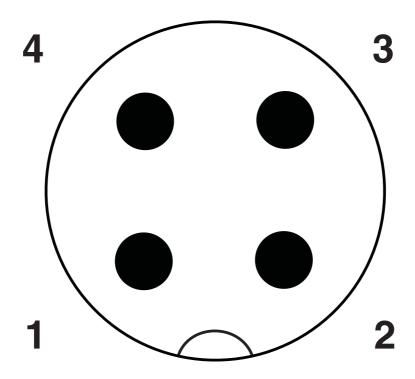


Pin assignment M12 plug, 4-pos., A-coded, view plug side

1519765

https://www.phoenixcontact.com/us/products/1519765



Schematic diagram

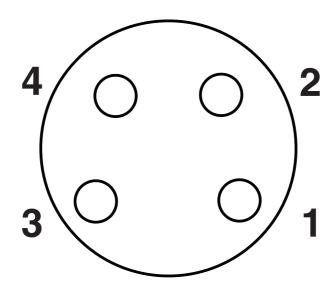

Pin assignment M8 socket, 4-pos., view female side

Circuit diagram



Contact assignment of the M8/M12 adapter



https://www.phoenixcontact.com/us/products/1519765



Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1519765

EAC	EAC
LIIL	Approval ID: RU C-DE.Al30.B.01102

UL Listed Approval ID: E221474				
	Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
keine				
	30 V	4 A	-	-

cUL Listed Approval ID: E221474				
	Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
keine				
	30 V	4 A	-	-



1519765

https://www.phoenixcontact.com/us/products/1519765

Classifications

ECLASS

	ECLASS-13.0	27440106		
	ECLASS-15.0	27440106		
ETIM				
	ETIM 9.0	EC002925		
UNSPSC				
	UNSPSC 21.0	31251500		



https://www.phoenixcontact.com/us/products/1519765



Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%
EF3.0 Climate Change	

Phoenix Contact 2025 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com