

1595893

https://www.phoenixcontact.com/us/products/1595893

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



M23, Cable connector, straight, Screw locking mechanism, No. of pos.: 8+1, Direction of rotation: Standard, contact connection type: Socket, Solder cup, cable diameter range: 7.5 mm... 9.5 mm, coding: N, this item is expected to be lead-free from Q1 2027 in accordance with RoHS II without exception 6c (Pb < 0.1%), a lead-free alternative is possible on request in advance

Commercial data

Item number	1595893
Packing unit	20 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Product key	ABRAFA
GTIN	4046356208840
Weight per piece (including packing)	73.92 g
Weight per piece (excluding packing)	70.302 g
Country of origin	DE



1595893

https://www.phoenixcontact.com/us/products/1595893

Technical data

Product properties

Product type	Circular connector (cable-side)

Connector

Insulating body

Coding	N
Material (Insulating body)	PBT
Material (Contact)	CuZn
Material (Contact surface)	Ni/Au
Insertion/withdrawal cycles	50
Connection method	Solder cup
Contact switching type	Socket
Application	Signal
Number of positions	9
Direction of rotation	Standard
Connection profile	8+1
Number Contact (Contact group 1)	1
Diameter Contact (Contact group 1)	2 mm
Litz wire cross-section min. Contact (Contact group 1)	0.08 mm²
Litz wire cross-section max. Contact (Contact group 1)	2.5 mm²
Rated current Contact (Contact group 1)	20 A (for max. connection cross section)
Rated voltage Contact (Contact group 1)	48 V AC
	74 V DC
Rated surge voltage	1.5 kV
Overvoltage category	III
Degree of pollution	3
Number Contact (Contact group 2)	8
Diameter Contact (Contact group 2)	1 mm
Litz wire cross-section min. Contact (Contact group 2)	0.08 mm ²
Litz wire cross-section max. Contact (Contact group 2)	1 mm²
Rated current Contact (Contact group 2)	8 A (for max. connection cross section)
Rated voltage Contact (Contact group 2)	48 V AC
	48 V AC

Housing

Note	Order contact inserts separately
Туре	Cable connector housing
Thread type	M23
Design	straight
Type of locking	Screw locking mechanism
Pg screw connection	none



1595893

https://www.phoenixcontact.com/us/products/1595893

Material (Housing)	Metal
Degree of protection (plugged in)	IP65
	IP67
	IP68
Seal	
External cable diameter	7.5 mm 9.5 mm




https://www.phoenixcontact.com/us/products/1595893



Drawings

Schematic diagram

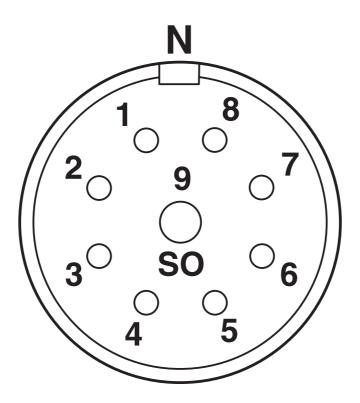


Connector pin assignment



1595893

https://www.phoenixcontact.com/us/products/1595893

Schematic diagram

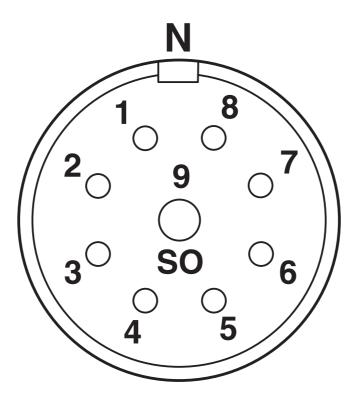


Connector pin assignment



https://www.phoenixcontact.com/us/products/1595893



Schematic diagram

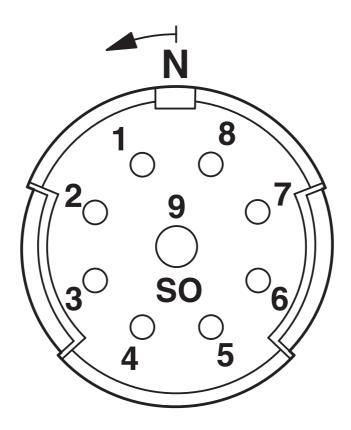


Connector pin assignment



https://www.phoenixcontact.com/us/products/1595893



Schematic diagram

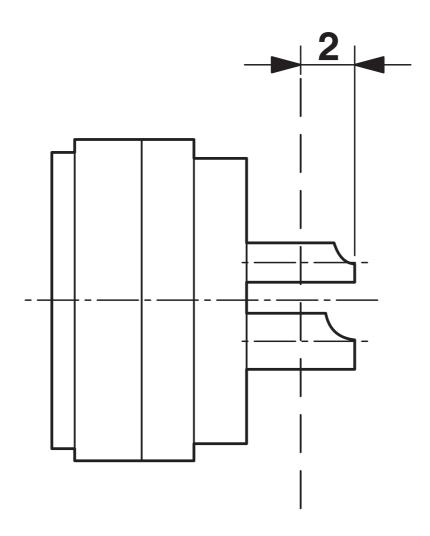

Dimensional drawing



1595893

https://www.phoenixcontact.com/us/products/1595893

Classifications

ECLASS

	ECLASS-13.0	27440116
	ECLASS-15.0	27440116
ETIM		
	ETIM 9.0	EC002635
UNSPSC		
	UNSPSC 21.0	39121400



1595893

https://www.phoenixcontact.com/us/products/1595893

Environmental product compliance

EU RoHS

Yes
6(c)
EFUP-50
An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
Lead(CAS: 7439-92-1)
8056ff7f-d25a-4835-9f69-5a52b7ffa894

Phoenix Contact 2025 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com