

1599343

https://www.phoenixcontact.com/us/products/1599343

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Contact insert, M23, number of positions: 12, contact connection type: Socket, Crimp connection, series: NC, RC, RM, TU, UC, this item is expected to be lead-free from Q4 2025 in accordance with RoHS II without exception 6c (Pb < 0.1%), a lead-free alternative is possible on request in advance

Commercial data

| Item number | 1599343 |
|--------------------------------------|---------------|
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Sales key | AB31 |
| Product key | ABRAFU |
| GTIN | 4046356225465 |
| Weight per piece (including packing) | 11.7 g |
| Weight per piece (excluding packing) | 5.1 g |
| Customs tariff number | 85389099 |
| Country of origin | DE |



https://www.phoenixcontact.com/us/products/1599343



Technical data

Product properties

| Product type | Contact insert |
|---------------------|----------------|
| Series | NC |
| | RC |
| | RM |
| | TU |
| | UC |
| Application | Signal |
| Number of positions | 12 |
| Connection profile | 12 |
| Coding | N |
| Thread type | M23 |

Electrical properties

Contact: Contact group 1

| Contact diameter | 1 mm |
|--------------------------------|---|
| Min. cross section | 0.14 mm² |
| Max. cross section | 0.56 mm² |
| Nominal current I _N | 8 A (for max. connection cross section) |
| Nominal voltage U _N | 48 V AC |
| | 74 V DC |
| Overvoltage category | III |
| Degree of pollution | 3 |
| Rated surge voltage | 1.5 kV |

Connection data

| Connection method | Connection method | Crimp connection |
|-------------------|-------------------|------------------|
|-------------------|-------------------|------------------|

Material specifications

| Material Insulating body | PA 6.6 |
|--------------------------|--------|
| Material Contact | CuZn |
| Material Contact surface | Ni/Au |

Connector

| Direction of rotation | Standard |
|-----------------------|----------|
|-----------------------|----------|

Mechanical properties

Mechanical data

| Insertion/withdrawal cycles | 50 |
|-----------------------------|----|

Environmental and real-life conditions



1599343

https://www.phoenixcontact.com/us/products/1599343

Ambient conditions

| Permissible humidity (storage/transport) 50 | O % 65 % |
|---|----------|
|---|----------|




https://www.phoenixcontact.com/us/products/1599343



Drawings

Schematic diagram

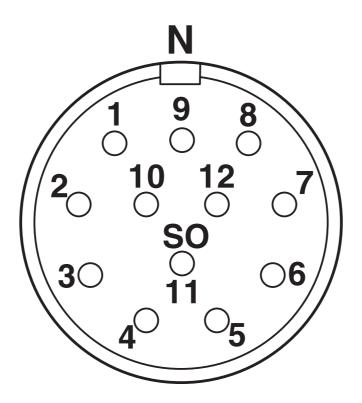


Connector pin assignment

1599343

https://www.phoenixcontact.com/us/products/1599343



Schematic diagram

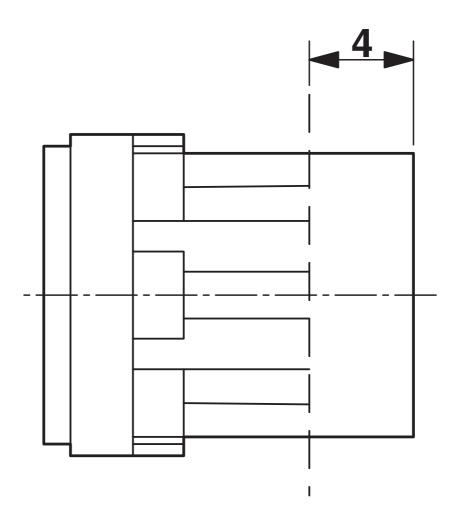

Dimensional drawing



1599343

https://www.phoenixcontact.com/us/products/1599343

Classifications

ECLASS

| | ECLASS-13.0 | 27440223 | |
|------|-------------|----------|--|
| | ECLASS-15.0 | 27440223 | |
| ETIM | | | |
| | ETIM 9.0 | EC003557 | |
| U | NSPSC | | |
| | UNSPSC 21.0 | 39121400 | |



1599343

https://www.phoenixcontact.com/us/products/1599343

Environmental product compliance

EU RoHS

| Fulfills EU RoHS substance requirements | Yes |
|---|---|
| Exemption | 6(c) |
| China RoHS | |
| Environment friendly use period (EFUP) | EFUP-50 |
| | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |
| EU REACH SVHC | |
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1) |
| SCIP | 8476f8cb-d1fd-435a-9660-498ef03a2933 |
| | |

Phoenix Contact 2025 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com