

1613524

https://www.phoenixcontact.com/us/products/1613524

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector front mounting with knurled nut, straight, SPEEDCON, M40, number of positions: 2+3+PE, contact connection type: Socket, Axial O-ring, shielded: yes, flange dimensions: 40 mm x 40 mm, number of positions: 6, connection method: Crimp connection, series: SM, this item is expected to be lead-free from Q2 2026 in accordance with RoHS II without exception 6c (Pb < 0.1%), a lead-free alternative is possible on request in advance

#### Commercial data

Item number	1613524
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	AB32
Product key	ABRBGN
GTIN	4046356400824
Weight per piece (including packing)	312.8 g
Weight per piece (excluding packing)	249.236 g
Customs tariff number	85366990
Country of origin	DE



1613524

https://www.phoenixcontact.com/us/products/1613524

### Technical data

#### Notes

Order information:	Order crimp contacts 2 x Ø 2 mm, 4 x Ø 3.6 mm separately
safety note	
Safety note	WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.
	<ul> <li>WARNING: Commission properly functioning products only.         The products must be regularly inspected for damage.         Decommission defective products immediately. Replace damaged products. Repairs are not possible.     </li> </ul>
	<ul> <li>WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.</li> </ul>
	<ul> <li>The products are suitable for applications in plant, controller, and electrical device engineering.</li> </ul>
	<ul> <li>When operating the connectors in outdoor applications, they must be separately protected against environmental influences.</li> </ul>
	<ul> <li>Assembled products may not be manipulated or improperly opened.</li> </ul>
	<ul> <li>Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products).</li> </ul>
	<ul> <li>When using the product in direct connection with third-party manufacturers, the user is responsible.</li> </ul>
	<ul> <li>For operating voltages &gt; 50 V AC, conductive connector housings must be grounded</li> </ul>
	<ul> <li>Ensure that the protective or functional ground has been properly connected.</li> </ul>
	VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector
	Only use tools recommended by Phoenix Contact
	<ul> <li>The installation notes/Design In documents online on the download page at phoenixcontact.com/products must be observed for this product.</li> </ul>
	<ul> <li>Operate the connector only when it is fully plugged in and interlocked.</li> </ul>
	<ul> <li>Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards.</li> </ul>
	<ul> <li>Observe the minimum bending radius of the cable. Lay the cable without twisting it.</li> </ul>
	The connector warms up in normal operation. Depending on the



1613524

https://www.phoenixcontact.com/us/products/1613524

	ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12).
lounting	
Mounting type	Front mounting/square flange (4x Ø 4,2 mm)
roduct properties	
Product type	Circular connectors (device side)
Series	SM
Application	Power
Number of positions	6
Connection profile	2+3+PE
Shielded	yes
Coding	N
Thread type	M40
imensions  Housing	
Flange dimensions	40 mm x 40 mm
laterial specifications	
Material Housing	GD-Zn
Material Rotating parts	CuZn
Material Housing surface	Ni
Material Insulating body	PA 6.6
Material Seal	FPM (O-ring)
lectrical properties  Contact: Contact group 1	
Contact diameter	3.6 mm
Nominal current I <sub>N</sub>	70 A
Nominal voltage U <sub>N</sub>	630 V
Overvoltage category	III
Degree of pollution	3
Rated surge voltage	6 kV
Contact: Contact group 2	
Contact diameter	2 mm
Nominal current I <sub>N</sub>	30 A
Nominal voltage U <sub>N</sub>	250 V
Nominal voltage on	
Overvoltage category	III



1613524

https://www.phoenixcontact.com/us/products/1613524

Rated surge voltage	4 kV
Connection data	
Conductor connection	
Connection method	Crimp connection
Contact connection type	Socket
Connector	straight
Environmental and real-life conditions	
Ambient conditions	
Degree of protection	IP67
Ambient temperature (operation)	-40 °C 125 °C
Altitude	3000 m




1613524

https://www.phoenixcontact.com/us/products/1613524

### Drawings

Dimensional drawing

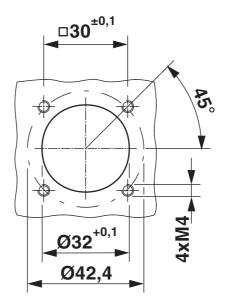


Installation dimensions




1613524

https://www.phoenixcontact.com/us/products/1613524

#### Dimensional drawing

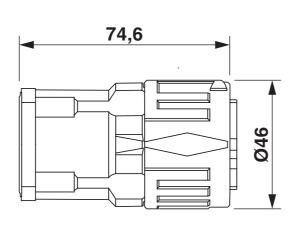

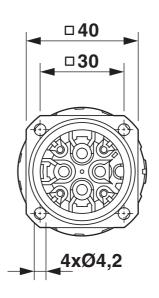


Dimensional drawing



1613524

https://www.phoenixcontact.com/us/products/1613524

### Schematic diagram

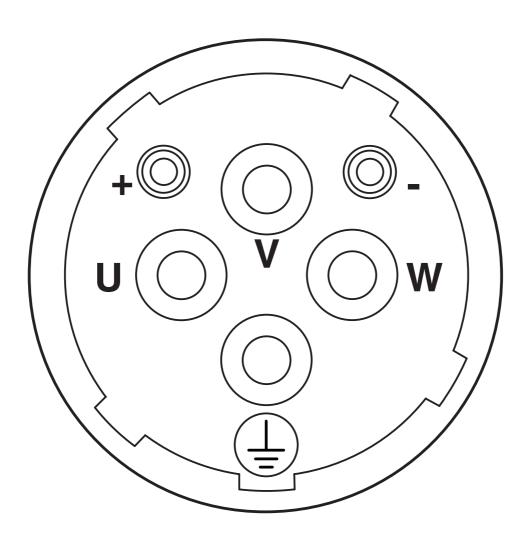


Connector pin assignment



1613524

https://www.phoenixcontact.com/us/products/1613524

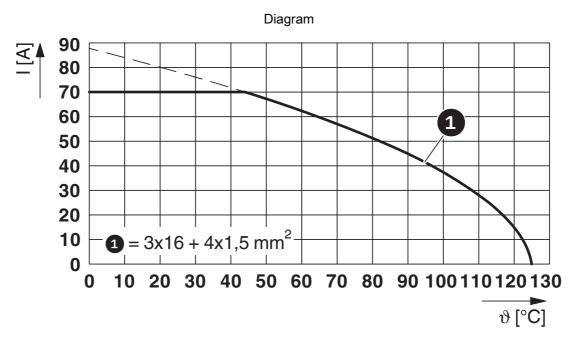

I = current strength, T = ambient temperature



1613524

https://www.phoenixcontact.com/us/products/1613524

### Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1613524

cUL Recogn Approval ID: E15	i <b>zed</b> 53698-20150903			
	Nominal voltage U <sub>N</sub>	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>
keine				
Power	600 V	40 A	-	-
Signal	600 V	20 A	-	-

UL Recognized Approval ID: E153698-20150903				
	Nominal voltage U <sub>N</sub>	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>
keine				
Power	600 V	65 A	-	-
Signal	600 V	30 A	-	-



1613524

https://www.phoenixcontact.com/us/products/1613524

### Classifications

#### **ECLASS**

	ECLASS-13.0	27440109		
	ECLASS-15.0	27440109		
ΕT	ETIM			
	ETIM 9.0	EC003569		
UNSPSC				
O.	<b>1</b> 01 00			
	UNSPSC 21.0	39121400		



1613524

https://www.phoenixcontact.com/us/products/1613524

### Environmental product compliance

#### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	64ffb4fd-b57f-4862-868c-611778b34c66

Phoenix Contact 2025 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com