

# CB E1 24DC/4A S-C P - Electronic circuit breaker



2800925

<https://www.phoenixcontact.com/us/products/2800925>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Electronic circuit breaker, 1-pos., active current limitation, status output and control input, plug for base element.

## Your advantages

- Individually adjustable with protective plugs
- Protective plug with fixed nominal current value as protection against unintentional changes
- Active current limitation to improve the capacity of the upstream power supply
- Remote switch-on and switch-off thanks to the controller function
- Increased system transparency with integrated remote message function

## Commercial data

|                                      |               |
|--------------------------------------|---------------|
| Item number                          | 2800925       |
| Packing unit                         | 1 pc          |
| Minimum order quantity               | 1 pc          |
| Sales key                            | CL04          |
| Product key                          | CLA134        |
| GTIN                                 | 4046356690812 |
| Weight per piece (including packing) | 35.5 g        |
| Weight per piece (excluding packing) | 35.5 g        |
| Customs tariff number                | 85362010      |
| Country of origin                    | DE            |

# CB E1 24DC/4A S-C P - Electronic circuit breaker



2800925

<https://www.phoenixcontact.com/us/products/2800925>

## Technical data

### Notes

|         |                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| General | When mounted in rows without convection cooling, the nominal device current should only be led to a maximum of 80% due to the thermal effect during continuous operation (100% operating factor).<br>Special precautionary measures must be taken in systems or machines, to prevent components from restarting (e.g., use of a safety PLC).<br>Parallel connection of multiple circuit breakers is not permitted. |
|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

### Product properties

|                     |                         |
|---------------------|-------------------------|
| Product type        | Device circuit breakers |
| Product family      | CB E                    |
| Type                | Male                    |
| Number of positions | 1                       |
| No. of channels     | 1                       |

### Insulation characteristics

|                     |   |
|---------------------|---|
| Degree of pollution | 2 |
|---------------------|---|

### Electrical properties

#### General

|                              |                                           |
|------------------------------|-------------------------------------------|
| Operating voltage            | 24 V DC                                   |
|                              | 18 V DC ... 30 V DC                       |
| Nominal current $I_N$        | 4 A                                       |
| Rated surge voltage          | 0.5 kV                                    |
| Tripping method              | E (electronic)                            |
| Required backup fuse         | not required, integrated failsafe element |
| Dielectric strength          | max. 30 V DC (Load circuit)               |
| Active current limitation    | typ. $1.25 \times I_N$                    |
| Fuse                         | electronic                                |
| Closed circuit current $I_0$ | typ. 8 mA (When switched on)              |
|                              | typ. 11 mA (With status output)           |
| Power dissipation            | 0.66 W (Nominal operation)                |
| Temperature derating         | 4 A (at 50 °C)                            |
| MTBF (IEC 61709, SN 29500)   | 8320000 h (at 25 °C with 80 % load)       |
|                              | 7410000 h (at 40 °C with 80 % load)       |
| Voltage drop                 | 100 mV (at $I_N$ )                        |
| Fail-safe element            | 6 A DC                                    |
| Contact switching type       | without electrical isolation              |

#### Load circuit

|                         |                                                |
|-------------------------|------------------------------------------------|
| Shutdown time           | 200 ms (see time/current characteristic curve) |
| Undervoltage switch-off | < 14 V (typ. OFF)                              |

# CB E1 24DC/4A S-C P - Electronic circuit breaker



2800925

<https://www.phoenixcontact.com/us/products/2800925>

|                      |                  |
|----------------------|------------------|
|                      | > 17 V (typ. ON) |
| Max. capacitive load | 20000 µF         |
| Switch-on delay      | typ. 2 ms        |

## Auxiliary contact

|                         |                                  |
|-------------------------|----------------------------------|
| Contact connection type | Positive-switching signal output |
|-------------------------|----------------------------------|


## Status output

|                |                                  |
|----------------|----------------------------------|
| Output voltage | 24 V DC                          |
| Output current | max. 0.2 A (Short-circuit-proof) |

## Connection data

|                   |           |
|-------------------|-----------|
| Connection method | pluggable |
|-------------------|-----------|

## Dimensions

|                        |                                                                                     |
|------------------------|-------------------------------------------------------------------------------------|
| Dimensional drawing    |  |
| Width                  | 12.3 mm                                                                             |
| Height                 | 45 mm                                                                               |
| Depth                  | 52 mm                                                                               |
| Complete module width  | 12.3 mm                                                                             |
| Complete module height | 90 mm                                                                               |
| Complete module depth  | 77.3 mm                                                                             |

## Material specifications

|                                        |                                     |
|----------------------------------------|-------------------------------------|
| Color                                  | gray (RAL 7042)<br>black (RAL 9005) |
| Flammability rating according to UL 94 | V-0                                 |

## Environmental and real-life conditions

### Ambient conditions

|                                         |                                          |
|-----------------------------------------|------------------------------------------|
| Degree of protection                    | IP30 (Actuation area)                    |
| Ambient temperature (operation)         | -25 °C ... 50 °C (non-condensing)        |
| Ambient temperature (storage/transport) | -40 °C ... 70 °C                         |
| Humidity test                           | 96 h, 95 % RH, 40 °C                     |
| Vibration (operation)                   | 3g (according to IEC 60068-2-6, Test Fc) |

## Approvals

### UL approval

|                |                  |
|----------------|------------------|
| Identification | UL Listed UL 508 |
|----------------|------------------|

# CB E1 24DC/4A S-C P - Electronic circuit breaker



2800925

<https://www.phoenixcontact.com/us/products/2800925>

|  |                       |
|--|-----------------------|
|  | UL Recognized UL 2367 |
|--|-----------------------|

Shipbuilding approval

|                |        |
|----------------|--------|
| Identification | DNV GL |
|----------------|--------|

## Standards and regulations

|                          |                       |
|--------------------------|-----------------------|
| Standard designation     | EMV                   |
| Standards/specifications | EN 61000-6-3          |
| Note                     | Interference emission |
| Standard designation     | EMV                   |
| Standards/specifications | EN 61000-6-2          |
| Note                     | Noise immunity        |

## Mounting

|               |                 |
|---------------|-----------------|
| Mounting type | on base element |
|---------------|-----------------|

# CB E1 24DC/4A S-C P - Electronic circuit breaker


2800925

<https://www.phoenixcontact.com/us/products/2800925>




## Drawings

Dimensional drawing

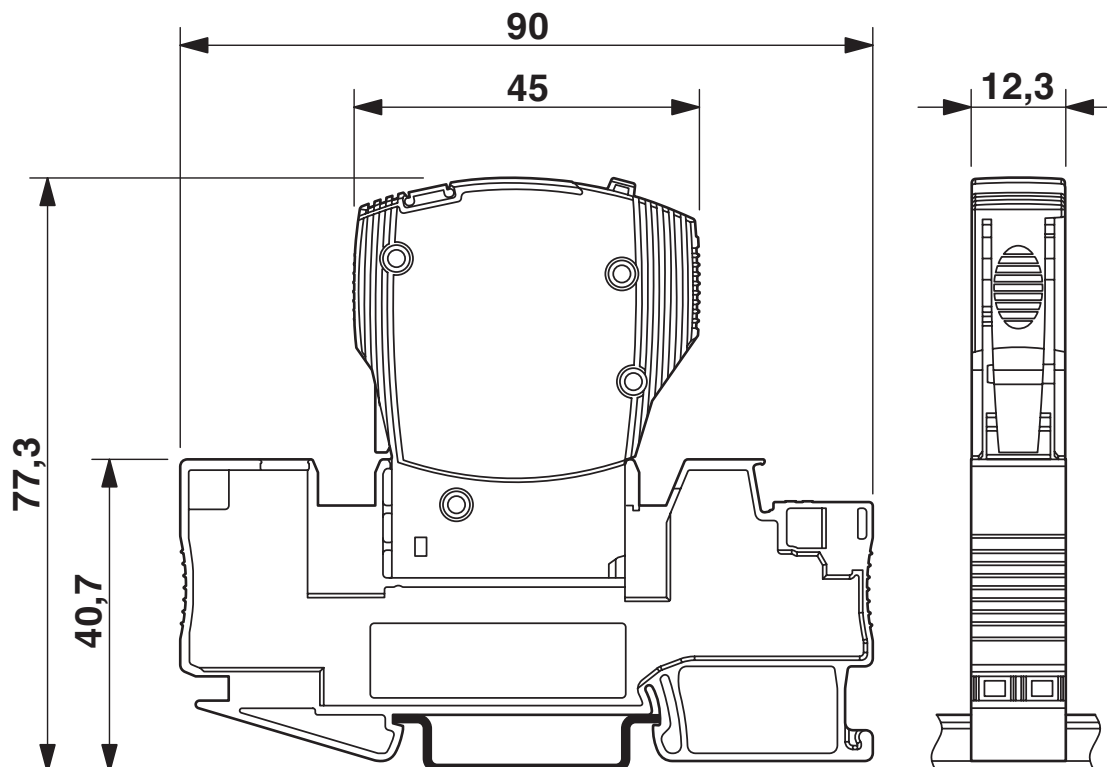

The figure shows the complete module consisting of a base element and connector

Application drawing

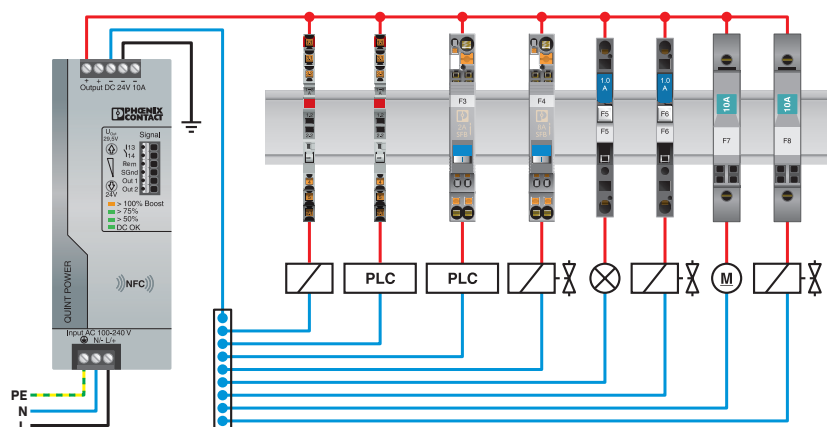


Diagram



Trigger characteristic

Circuit diagram

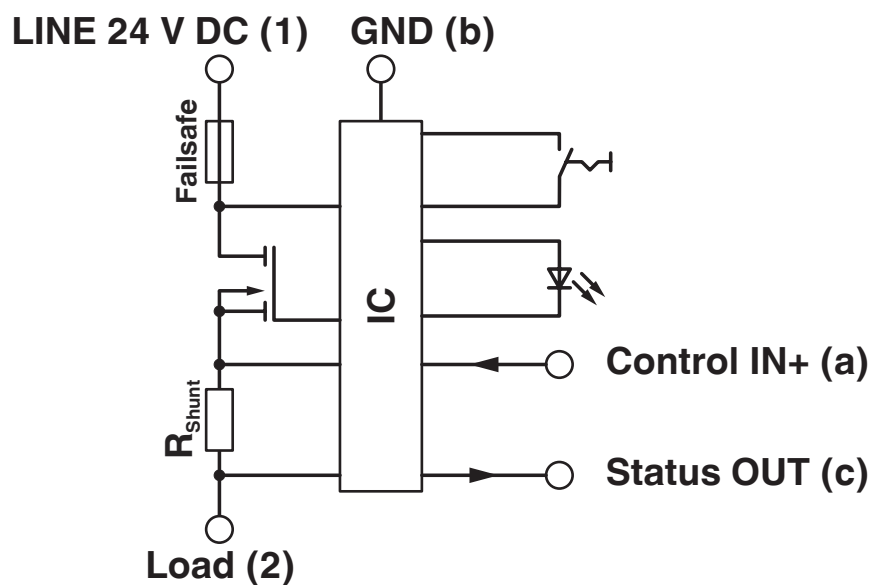

# CB E1 24DC/4A S-C P - Electronic circuit breaker



2800925

<https://www.phoenixcontact.com/us/products/2800925>

## Approvals

 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2800925>



**UL Recognized**

Approval ID: FILE E 317172



**DNV GL**

Approval ID: TAE00003KA



**cULus Listed**

Approval ID: E123528

# CB E1 24DC/4A S-C P - Electronic circuit breaker



2800925

<https://www.phoenixcontact.com/us/products/2800925>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-13.0 | 27140401 |
| ECLASS-15.0 | 27140401 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC003538 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

# CB E1 24DC/4A S-C P - Electronic circuit breaker



2800925

<https://www.phoenixcontact.com/us/products/2800925>

## Environmental product compliance

### EU RoHS

|                                         |              |
|-----------------------------------------|--------------|
| Fulfills EU RoHS substance requirements | Yes          |
| Exemption                               | 7(a), 7(c)-I |

### China RoHS

|                                        |                                                                                                                                                                                                                                   |
|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Environment friendly use period (EFUP) | EFUP-25                                                                                                                                                                                                                           |
|                                        | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

### EU REACH SVHC

|                                     |                                      |
|-------------------------------------|--------------------------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1)                 |
| SCIP                                | e664195b-132b-4269-bf89-6f793505546f |

### EF3.0 Climate Change

|         |               |
|---------|---------------|
| CO2e kg | 2.779 kg CO2e |
|---------|---------------|

Phoenix Contact 2025 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)