

1418248

https://www.phoenixcontact.com/us/products/1418248

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Patch cable, degree of protection: IP20, cable length: 1 m, number of positions: 4, 100 Mbps, CAT5, material: PA 6.6, PROFINET, 1x4xAWG22/7, SF/TQ, green RAL 6018

Commercial data

| Item number | 1418248 |
|--------------------------------------|---------------|
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Sales key | AB11 |
| Product key | ABNABA |
| GTIN | 4046356534475 |
| Weight per piece (including packing) | 94.1 g |
| Weight per piece (excluding packing) | 87.307 g |
| Customs tariff number | 85444210 |
| Country of origin | PL |



1418248

https://www.phoenixcontact.com/us/products/1418248

Technical data

Product properties

| Product type | Data cable preassembled | |
|----------------------------|--------------------------|--|
| Product family | RJ45 INDUSTRIAL PN4 CAT5 | |
| Sensor type | PROFINET | |
| Number of positions | 4 | |
| Connection profile | RJ45 8(4) | |
| Shielded | yes | |
| Insulation characteristics | | |
| Overvoltage category | I | |
| | | |

Signaling

| Status display | no |
|------------------------|----|
| Status display present | no |

Electrical properties

| Rated voltage (III/3) | 72 V (DC) |
|--------------------------------|-----------|
| Rated current | 1.75 A |
| Nominal voltage U _N | 48 V |
| Nominal current I _N | 1 A |
| Transmission medium | Copper |
| Transmission speed | 100 Mbps |
| Transmission speed | 100 Mbps |

Mechanical properties

Mechanical data

| Insertion/withdrawal cycles | ≥ 750 |
|-------------------------------------|---------|
| Insertion force per signal contact | 50.00 N |
| Extraction force per signal contact | 30 N |

Material specifications

| Flammability rating according to UL 94 | V2 |
|--|--------|
| Housing material | PA 6.6 |
| Contact material | CuSn |
| Contact surface material | Ni/Au |

Connector

Connection 1

| Туре | Plug straight RJ45 |
|----------|--------------------|
| Shielded | yes |



1418248

https://www.phoenixcontact.com/us/products/1418248

| Handle color | black |
|----------------------|-------------------------|
| Material | CuSn (Contact) |
| | Ni/Au (Contact surface) |
| | PA (Contact carrier) |
| | PA (Housing) |
| Degree of protection | IP20 |

Connection 2

| Туре | Plug straight RJ45 |
|-----------------------------|-------------------------|
| Shielded | yes |
| Handle color | black |
| Material | CuSn (Contact) |
| | Ni/Au (Contact surface) |
| | PA (Contact carrier) |
| | PA (Housing) |
| Insertion/withdrawal cycles | ≥ 750 |
| Degree of protection | IP20 |

Cable/line

| | 1.00 m |
|--|--------|
|--|--------|

PROFINET PVC stranded CAT5 [93B]

Dimensional drawing



| Note | Minimum bending radius 4 x D |
|---------------------------------|--|
| Number of positions | 4 |
| Shielded | yes |
| Cable type | PROFINET PVC stranded CAT5 [93B] |
| Conductor structure | 1x4xAWG22/7, SF/TQ |
| Conductor structure signal line | 7x 0.25 mm |
| AWG signal line | 22 |
| Conductor cross section | 4x 0.34 mm² |
| Wire diameter incl. insulation | approx. 1.5 mm |
| External cable diameter | 6.50 mm |
| Outer sheath, material | PVC |
| External sheath, color | green RAL 6018 |
| Conductor material | Tin-plated Cu litz wires |
| Single wire, color | white, yellow, blue, orange |
| Wave impedance | 100 Ω ±15 Ω (at 1 100 MHz) |



1418248

https://www.phoenixcontact.com/us/products/1418248

| Smallest bending radius, fixed installation | 30 mm |
|---|--------------|
| Smallest bending radius, movable installation | 60 mm |
| Ambient temperature (operation) | -25 °C 80 °C |
| | -25 °C 80 °C |

Environmental and real-life conditions

Ambient conditions

| Degree of protection | IP20 |
|--|-------------------------------|
| | IP20 |
| Ambient temperature (operation) (Plug) | -25 °C 80 °C (RJ45 connector) |




1418248

https://www.phoenixcontact.com/us/products/1418248

Drawings

Schematic diagram

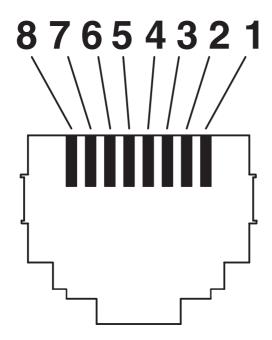


Connector pin assignment plug RJ45



1418248

https://www.phoenixcontact.com/us/products/1418248

Circuit diagram

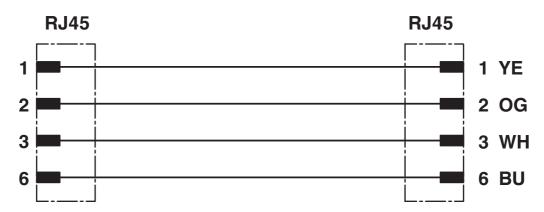



1418248

https://www.phoenixcontact.com/us/products/1418248

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1418248



EAC

Approval ID: 19060508



1418248

https://www.phoenixcontact.com/us/products/1418248

Classifications

ECLASS

| | ECLASS-13.0 | 27060307 | |
|--------|-------------|----------|--|
| | ECLASS-15.0 | 27060307 | |
| | | | |
| ETIM | | | |
| | ETIM 9.0 | EC001855 | |
| UNSPSC | | | |
| | | | |
| | UNSPSC 21.0 | 26121600 | |



1418248

https://www.phoenixcontact.com/us/products/1418248

Environmental product compliance

EU RoHS

| Fulfills EU RoHS substance requirements | Yes, No exemptions | | | |
|---|--|--|--|--|
| China RoHS | | | | |
| Environment friendly use period (EFUP) | EFUP-E | | | |
| | No hazardous substances above the limits | | | |
| EU REACH SVHC | | | | |
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% | | | |

Phoenix Contact 2025 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com