

1308656

https://www.phoenixcontact.com/us/products/1308656

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector front mounting, Range of articles: PRC 20, color: black, number of positions: 5, min. conductor cross-section: 0.5 mm², max. conductor cross-section: 2.5 mm², rated voltage: 400 V, rated current: 20 A, Connection method: Screw connection, Setting option for release: 1. with a tool or 2. by hand, scope: SIGNAL

Your advantages

- · More space on the device front with current transmission up to 20 A in a minimum amount of space
- · Duo-Unlock technology for greater flexibility during installation and maintenance
- · Reliable use under extreme ambient conditions with high degrees of protection and impact resistance
- · Simple handling with proven crimp or screw connection technology
- · Mechanical and color coding for quick and error-free startup




1308656

https://www.phoenixcontact.com/us/products/1308656

Drawings


Dimensional drawing

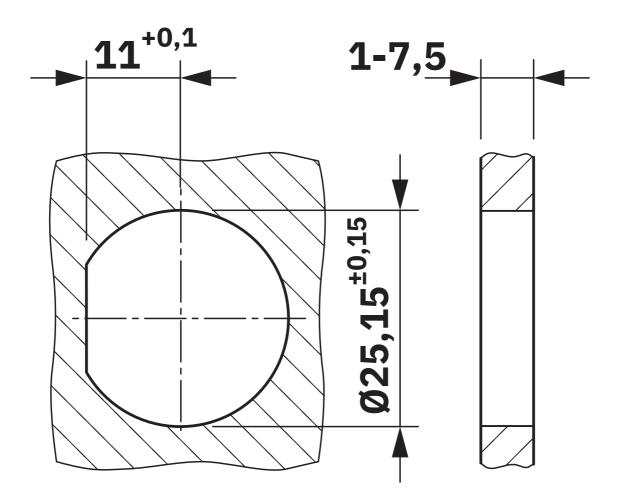




1308656

https://www.phoenixcontact.com/us/products/1308656

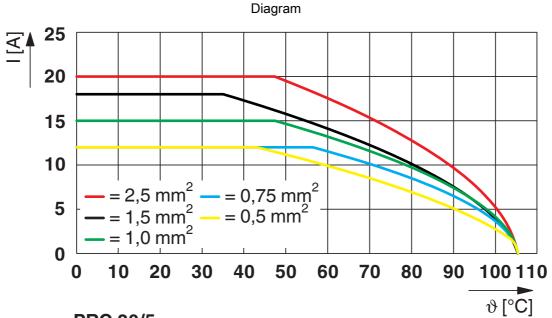

PRC 20/5...
IEC 60512-5-2 / 4 conductors

Derating

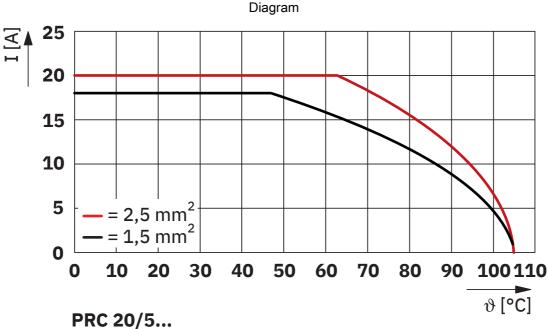

IEC 61535 / 3 conductors

Derating



1308656

https://www.phoenixcontact.com/us/products/1308656

Phoenix Contact 2025 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com