

1411196

https://www.phoenixcontact.com/us/products/1411196

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Cable gland, material for screw connection: Brass, nickel-plated, application: EMC, external cable diameter 4 mm ... 8 mm, shielding: yes, connecting thread: Pg9, color: silver-colored, with O-ring

### Commercial data

| Item number                          | 1411196       |
|--------------------------------------|---------------|
| Packing unit                         | 10 pc         |
| Minimum order quantity               | 1 pc          |
| Sales key                            | BF68          |
| Product key                          | AF7DBX        |
| GTIN                                 | 4046356923279 |
| Weight per piece (including packing) | 19.02 g       |
| Weight per piece (excluding packing) | 18.84 g       |
| Customs tariff number                | 74198090      |
| Country of origin                    | TR            |



1411196

https://www.phoenixcontact.com/us/products/1411196

### Technical data

### Mounting

| Assembly note | Mount screw connection flange in the housing using the correct torque 2) Insert cable 3) Tighten union nut using the correct torque   |
|---------------|---|
|               | Method 1 Cut the outer sheath, but do not remove it. Feed the cable through the screw connection and then remove the outer sheath. Now pull the cable back until the connection is established between the cable shield and the contact spring. |
|               | Method 2 Push the braided shield back around 15 20 mm over the outer sheath. Insert the cables into the screw connection until the connection is established between the cable shield and the contact spring.                                   |

### Product properties

| Product type             | Cable screw gland |
|--------------------------|-------------------|
| Application              | EMC               |
| No. of conductors        | 1                 |
| Manufacturer             | BIMED             |
| Manufacturer Designation | BSEM-02           |
| Shielded                 | yes               |

### Characteristics

| Cable diameter without cable sheath | 3 mm (Diameter of braided shield) |
|-------------------------------------|-----------------------------------|
|-------------------------------------|-----------------------------------|

### **Dimensions**



#### Connection data

| Tightening torque | 5.5 Nm (Union nut: EN 62444) |
|-------------------|------------------------------|
|                   | 4 Nm (Support: EN 62444)     |



1411196

https://www.phoenixcontact.com/us/products/1411196

### Material specifications

| Color                         | brass color          |
|-------------------------------|----------------------|
| Material Compression ring     | PA 6                 |
| Seal material O-ring          | Perbunan             |
| Seal material Cable seal      | CR                   |
| Material for screw connection | Brass, nickel-plated |

### Cable/line

| External cable diameter Cable 1 | 4 mm 8 mm |
|---------------------------------|-----------|
| Halogen-free                    | no        |

### Environmental and real-life conditions

#### Ambient conditions

| Degree of protection            | IP68                   |
|---------------------------------|------------------------|
| Ambient temperature (operation) | -40 °C 100 °C (static) |




https://www.phoenixcontact.com/us/products/1411196




### Drawings

### Dimensional drawing

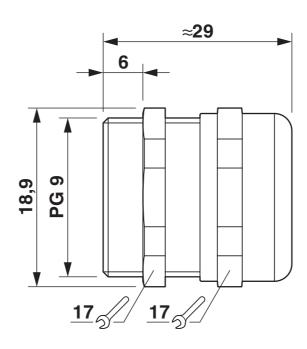

### Dimensional drawing

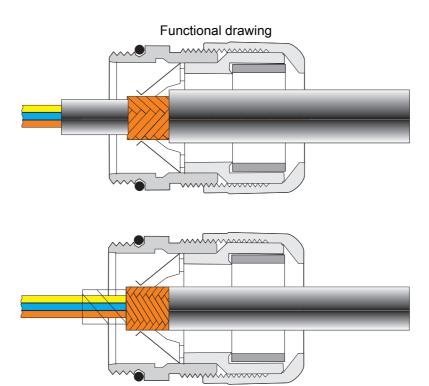

See assembly instruction



1411196

https://www.phoenixcontact.com/us/products/1411196

### **Approvals**

🌣 To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1411196

DNV

Approval ID: TAE00003WY



1411196

https://www.phoenixcontact.com/us/products/1411196

### Classifications

### **ECLASS**

|      | ECLASS-13.0 | 27140801 |
|------|-------------|----------|
|      | ECLASS-15.0 | 27140801 |
| ETIM |             |          |
|      | ETIM 9.0    | EC000441 |
| U    | NSPSC       |          |
|      |             |          |

UNSPSC 21.0

39121300



1411196

https://www.phoenixcontact.com/us/products/1411196

### Environmental product compliance

#### EU RoHS

| Fulfills EU RoHS substance requirements | Yes   |
|---|---|
| Exemption                               | 6(c)  |
| China RoHS                              |   |
| Environment friendly use period (EFUP)  | EFUP-50   |
|   | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |
| EU REACH SVHC                           |   |
| REACH candidate substance (CAS No.)     | Lead(CAS: 7439-92-1)  |
| SCIP                                    | 29024407-7e8b-4cf4-a564-8f08c0ed0abd  |

Phoenix Contact 2025 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com