

3073966

https://www.phoenixcontact.com/us/products/3073966

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Fuse modular terminal block, fuse type: Glass / ceramics / ..., fuse type: G / 6.3×32 , nom. voltage: 400 V, nominal current: 10 A, connection method: Screw connection, Rated cross section: 1.5 mm^2 , cross section: 0.5 mm^2 - 16 mm^2 , mounting type: NS 35/7.5, NS 35/15, NS 32, color: black

Your advantages

· Fuse terminal block for explosion protection

Commercial data

Item number	3073966
Packing unit	50 pc
Minimum order quantity	50 pc
Sales key	BE12
Product key	BE1235
GTIN	4046356343138
Weight per piece (including packing)	34.756 g
Weight per piece (excluding packing)	34.756 g
Customs tariff number	85369095
Country of origin	PL



3073966

https://www.phoenixcontact.com/us/products/3073966

Technical data

Product properties

Product type	Fuse terminal block
Number of connections	2
Number of rows	1
Potentials	1
Insulation characteristics	
Overvoltage category	III
Degree of pollution	3

Electrical properties

Fuse type	Glass / ceramics /
Rated surge voltage	4 kV
Maximum power dissipation for nominal condition	2.43 W
Fuse	G / 6,3 x 32

Connection data

Number of connections per level	2
Nominal cross section	16 mm²

Level 1 above 1 below 1

Level 1 above 1 below 1	
Connection method	Screw connection
Screw thread	M4
Tightening torque	1.5 1.8 Nm
Stripping length	11 mm
Internal cylindrical gage	B6
Connection in acc. with standard	IEC 60947-7-3
Conductor cross-section rigid	0.5 mm² 16 mm²
Cross section AWG	20 6 (converted acc. to IEC)
Conductor cross-section flexible	0.5 mm² 16 mm²
Conductor cross-section, flexible [AWG]	20 6 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.5 mm² 10 mm²
Flexible conductor cross-section (ferrule with plastic sleeve)	0.5 mm² 10 mm²
Cross-section with insertion bridge, rigid	10 mm²
Cross-section with insertion bridge, flexible	10 mm²
2 conductors with same cross section, solid	0.5 mm² 4 mm²
2 conductors with same cross section, flexible	0.5 mm² 4 mm²
2 conductors with same cross section, flexible, with ferrule without plastic sleeve	0.5 mm² 4 mm²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm² 10 mm²
Nominal current	10 A
Maximum load current	10 A



3073966

https://www.phoenixcontact.com/us/products/3073966

Nominal voltage	400 V
	800 V (As a disconnect terminal block)
Nominal cross section	1.5 mm ²

Ex data

Rated data (ATEX/IECEx)

Identification	
Operating temperature range	-50 °C 125 °C
Ex-certified accessories	1205066 SZS 1,0X4,0 VDE
	1201442 E/UK
Rated insulation voltage	250 V
output	(Permanent)

Ex level General

Rated voltage	275 V
Rated current	10 A
Maximum load current	10 A

Ex connection data General

Torque range	1.5 Nm 1.8 Nm
Nominal cross section	16 mm²
Rated cross section AWG	6
Connection capacity rigid	0.5 mm ² 16 mm ²
Connection capacity AWG	20 6
Connection capacity flexible	0.5 mm ² 16 mm ²
Connection capacity AWG	20 6
2 conductors with same cross section, solid	0.5 mm² 4 mm²
2 conductors with the same cross-section AWG rigid	20 10
2 conductors with same cross section, stranded	0.5 mm² 4 mm²
2 conductors with the same cross-section AWG flexible	20 10

Dimensions

Width	12 mm
Height	62 mm
Depth on NS 32	62.2 mm
Depth on NS 35/7,5	57.2 mm
Depth on NS 35/15	64.7 mm

Material specifications

Color	black (RAL 9005)
Flammability rating according to UL 94	V2
Insulating material group	1
Insulating material	PA

Mechanical properties



3073966

https://www.phoenixcontact.com/us/products/3073966

Mechanical data	
Open side panel	No
nvironmental and real-life conditions	
Ambient conditions	
Ambient temperature (operation)	-60 °C 110 °C (Operating temperature range incl. self-heating for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C 70 °C
Ambient temperature (actuation)	-5 °C 70 °C
Permissible humidity (operation)	20 % 90 %
Permissible humidity (storage/transport)	30 % 70 %
andards and regulations	
Connection in acc. with standard	IEC 60947-7-3
ounting	
Mounting type	NS 35/7,5
	NS 35/15
	NS 32




3073966

https://www.phoenixcontact.com/us/products/3073966

Drawings

Circuit diagram

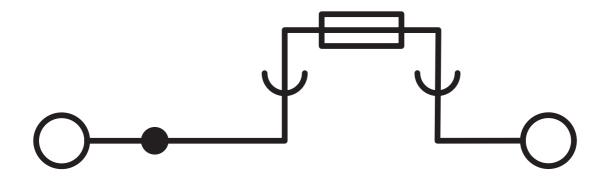



3073966

https://www.phoenixcontact.com/us/products/3073966

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/3073966

(Ex)	ATEX Approval ID: KEMA10ATEX0096U				
		Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
keine					
		250 V	10 A	-	0.5 - 16

(IEĈEX	IECEX Approval ID: IECEx KEM10.0054U				
		Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
keine					
		250 V	10 A	-	0.5 - 16

(ac)	CCC Approval ID: 2020322313000632				
---------------	---	--	--	--	--

(Ex)	UKCA-EX Approval ID: DEKRA 22UKEX6025U

EAC EX Approval ID: KZ 7500525010101950



3073966

https://www.phoenixcontact.com/us/products/3073966

Classifications

ECLASS

	ECLASS-13.0	27250113		
	ECLASS-15.0	27250113		
ETIM				
	ETIM 9.0	EC000899		
UNSPSC				
	UNSPSC 21.0	39121400		



3073966

https://www.phoenixcontact.com/us/products/3073966

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2025 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com