

FL SWITCH EP7428R-L3F1-C1 - Industrial Ethernet Switch



1216924

<https://www.phoenixcontact.com/us/products/1216924>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Ethernet gigabit modular switch with slots for twenty-four 10/100/1000 Mbps copper or 100/1000 Mbps SFP ports and four 1000/10,000 Mbps SFP ports using hot-swappable rear modules. Conformal coating for harsh environments.



Your advantages

- Network structure according to IEC 61850
- IEEE 1613
- Layer 2 and Layer 3 functions
- Modules allow device connections to expand from 10/100 Mbps to 1000 Mbps, and uplink connections from 1 Gbps to 10 Gbps
- Extensive security functions for remote access, local access and network access areas
- 28-port rack-mount switch with required modular port and power supplies
- Hot-swappable port and power supply modules
- IEEE 1588 v2 precision timing support

Commercial data

Item number	1216924
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DN36
Product key	DNN511
GTIN	4063151297282
Weight per piece (including packing)	7,860 g
Weight per piece (excluding packing)	6,272 g
Customs tariff number	85176200
Country of origin	US

FL SWITCH EP7428R-L3F1-C1 - Industrial Ethernet Switch



1216924

<https://www.phoenixcontact.com/us/products/1216924>

Technical data

Dimensions

Width	486.2 mm
Height	44.4 mm
Depth	446.7 mm

Notes

Note on application

Note on application	Only for industrial use
---------------------	-------------------------

Mounting

Mounting type	Rack mounting (with holder)
Holder system	19" rack

Interfaces

Ethernet

Connection method	SFP/RJ45
Note on the connection method	Auto negotiation and autocrossing
Transmission speed	10/100/1000 Mbps
	100/1000 Mbps
Transmission physics	Copper
Transmission length	100 m (per segment)
No. of channels	24 (Combo ports)

Ethernet (SFP)

Connection method	SFP
Transmission speed	1000/10,000 Mbps (full duplex)
Transmission physics	Depending on the SFP module
No. of channels	4 (SFP ports)

Output data

Digital:

Output name	Alarm relay output: 24 V DC, 1 A maximum
-------------	--

Product properties

Product type	Switch
Product family	Managed Switch EP7000

Insulation characteristics

Overvoltage category	II
Degree of pollution	2

Switch functions

FL SWITCH EP7428R-L3F1-C1 - Industrial Ethernet Switch



1216924

<https://www.phoenixcontact.com/us/products/1216924>

Signal contact control voltage	24 V DC
Signal contact control current	1 A
MAC address table	16k

Electrical properties

Maximum power dissipation for nominal condition	60 W
---	------

Supply

Supply voltage	Based on modular power supplies used
----------------	--------------------------------------

Function

Signal contact control voltage	24 V DC
Signal contact control current	1 A

Connection data

Connection technology

Connection name	Power supply
-----------------	--------------

Power supply

Connection method	Screw connection
Conductor cross-section, rigid	0.2 mm ² ... 2.5 mm ²
Conductor cross-section, flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross-section AWG	24 ... 12

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-40 °C ... 85 °C (Type tested to 85 °C for 16 hours)
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Permissible humidity (operation)	5 % ... 95 % (non-condensing)
Permissible humidity (storage/transport)	10 % ... 95 % (non-condensing)
Vibration (operation)	in acc. with IEC 60068-2-6: 5g, 150 Hz

Standards and regulations

Standard designation	Ambient conditions
Standards/specifications	IEC 61850-3 Ed. 2
	IEEE 1613

Approvals

Conformity/Approvals

Conformance	CE-compliant
-------------	--------------

EMC data

Noise immunity	IEC 61850-3, IEEE 1613, EN 61000-6-2: 2005
----------------	--


FL SWITCH EP7428R-L3F1-C1 - Industrial Ethernet Switch

1216924


<https://www.phoenixcontact.com/us/products/1216924>

Drawings

Connection diagram

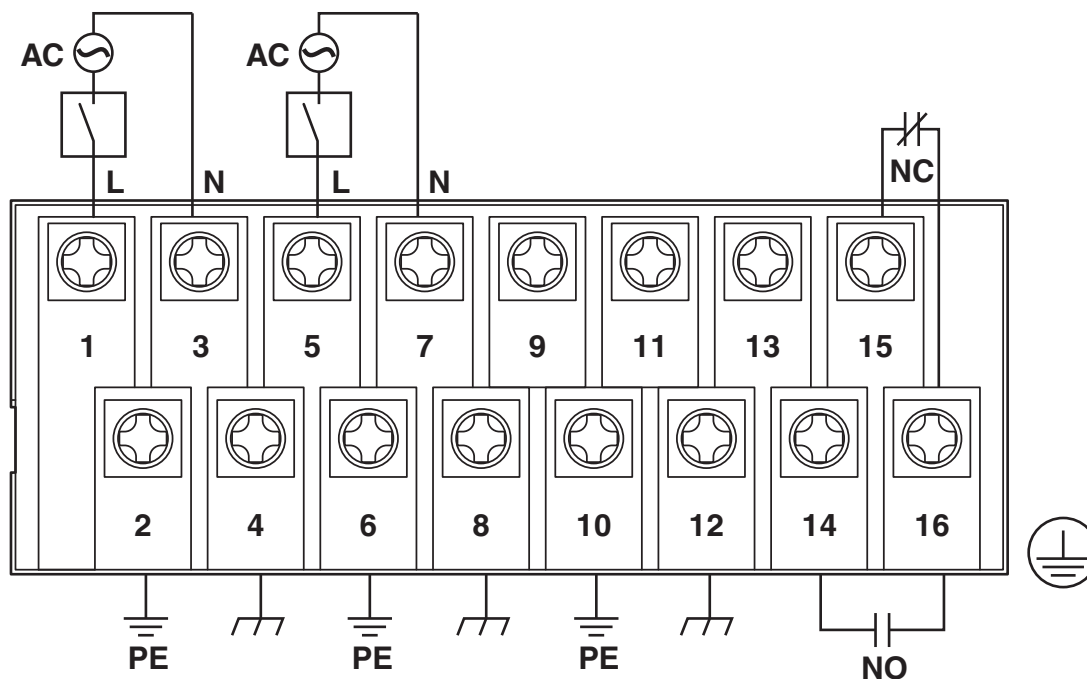

Connection diagram

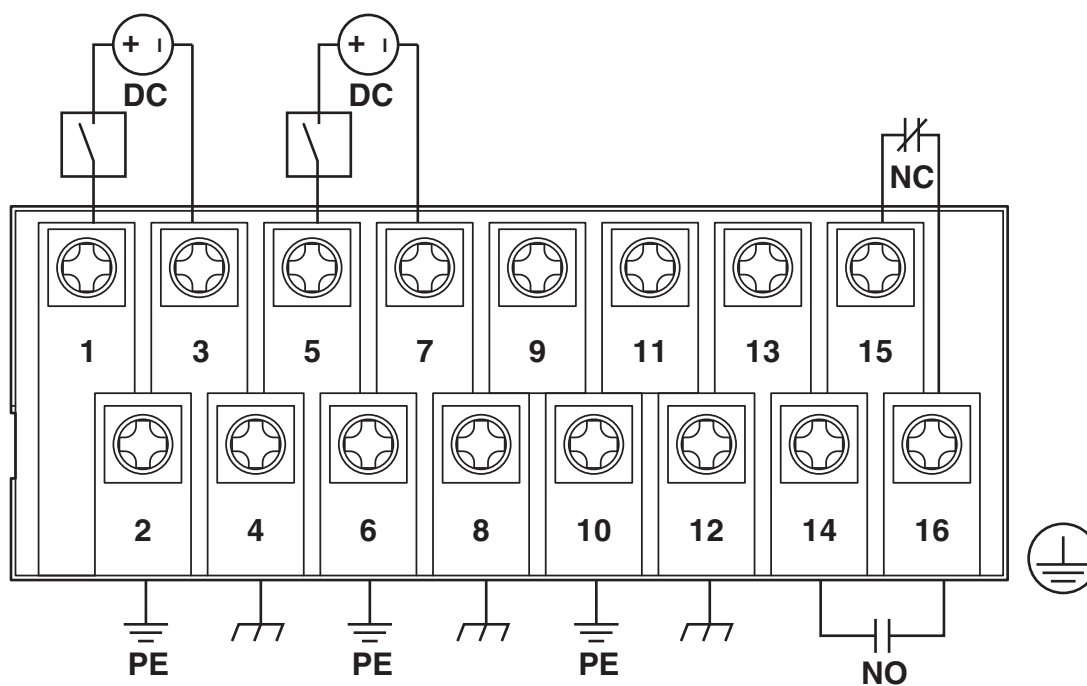

FL SWITCH EP7428R-L3F1-C1 - Industrial Ethernet Switch



1216924

<https://www.phoenixcontact.com/us/products/1216924>

Approvals

🔗 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1216924>



EAC

Approval ID: RU D-DE.GB09.B.00312

FL SWITCH EP7428R-L3F1-C1 - Industrial Ethernet Switch



1216924
<https://www.phoenixcontact.com/us/products/1216924>

Classifications

ECLASS

ECLASS-13.0	19170401
ECLASS-15.0	19170401

ETIM

ETIM 9.0	EC000734
----------	----------

FL SWITCH EP7428R-L3F1-C1 - Industrial Ethernet Switch



1216924

<https://www.phoenixcontact.com/us/products/1216924>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c), 7(a), 7(c)-I, 7(c)-II

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	1-Methyl-2-pyrrolidone (NMP)(CAS: 872-50-4)
	N,N-dimethylacetamide(CAS: 127-19-5)
	Hexahydromethylphthalic anhydride(CAS: n/a)
	Lead titanium zirconium oxide(CAS: 12626-81-2)
	Lead titanium trioxide(CAS: 12060-00-3)
	Orange lead (lead tetroxide)(CAS: 1314-41-6)
	4,4'-isopropylidenediphenol(CAS: 80-05-7)
	Terphenyl, hydrogenated(CAS: 61788-32-7)
	Lead(CAS: 7439-92-1)
	2-methyl-1-(4-methylthiophenyl)-2-morpholinopropan-1-one(CAS: 71868-10-5)

FL SWITCH EP7428R-L3F1-C1 - Industrial Ethernet Switch



1216924

<https://www.phoenixcontact.com/us/products/1216924>

Accessories

FL SWITCH EP7400-PS-LV-C1 - Feed-in module

1216922

<https://www.phoenixcontact.com/us/products/1216922>

Power module. Conformal coating for harsh environments.



FL SWITCH EP7400-PS-MV-C1 - Feed-in module

1216669

<https://www.phoenixcontact.com/us/products/1216669>

Power module. Conformal coating for harsh environments.



FL SWITCH EP7428R-L3F1-C1 - Industrial Ethernet Switch



1216924

<https://www.phoenixcontact.com/us/products/1216924>

FL SWITCH EP7400-PS-HV-C1 - Feed-in module

1216920

<https://www.phoenixcontact.com/us/products/1216920>

Power module. Conformal coating for harsh environments.



FL SWITCH EP7400-M8GRJ45-C1 - Communication module

1216921

<https://www.phoenixcontact.com/us/products/1216921>

Extension module, provides eight RJ45 ports at 10/100/1000 Mbps. Conformal coating for harsh environments.



FL SWITCH EP7428R-L3F1-C1 - Industrial Ethernet Switch



1216924

<https://www.phoenixcontact.com/us/products/1216924>

FL SWITCH EP7400-M8GSFP-C1 - Communication module

1216925

<https://www.phoenixcontact.com/us/products/1216925>

Extension module, provides eight SFP ports at 100/1000 Mbps. Conformal coating for harsh environments.



FL SWITCH EP7400-M4TGSFP-C1 - Communication module

1216923

<https://www.phoenixcontact.com/us/products/1216923>

Extension module, provides four SFP ports at 1/10 Gbps. Conformal coating for harsh environments.



FL SWITCH EP7428R-L3F1-C1 - Industrial Ethernet Switch



1216924

<https://www.phoenixcontact.com/us/products/1216924>

FL SWITCH EP7400-ABLK - Cover

1144428

<https://www.phoenixcontact.com/us/products/1144428>



FL SWITCH EP7400-PNLMNT - Mounting panel

1380736

<https://www.phoenixcontact.com/us/products/1380736>

The FL SWITCH EP7400-PNLMNT mounts FL SWITCH EP7... directly on a panel



FL SWITCH EP7428R-L3F1-C1 - Industrial Ethernet Switch



1216924

<https://www.phoenixcontact.com/us/products/1216924>

FL SFP SX - Media module

2891754

<https://www.phoenixcontact.com/us/products/2891754>



Gigabit SFP module for transmission up to 1 km with a wavelength of 850 nm.

FL SFP LX - Media module

2891767

<https://www.phoenixcontact.com/us/products/2891767>



Gigabit SFP module for transmission up to 30 km with a wavelength of 1310 nm.

FL SWITCH EP7428R-L3F1-C1 - Industrial Ethernet Switch



1216924

<https://www.phoenixcontact.com/us/products/1216924>

FL SFP GT-H - Media module

1207198

<https://www.phoenixcontact.com/us/products/1207198>

Gigabit SFP module for transmission up to 100 m.



FL SFP-10G-SR - Media module

1145046

<https://www.phoenixcontact.com/us/products/1145046>

10 Gigabit SFP module for transmission up to 300 m with a wavelength of 850 nm.



Phoenix Contact 2025 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com