

1411195

https://www.phoenixcontact.com/us/products/1411195

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Cable gland, material for screw connection: Brass, nickel-plated, application: EMC, external cable diameter 3 mm ... 6.5 mm, shielding: yes, connecting thread: Pg7, color: silver-colored, with O-ring

### Commercial data

Item number	1411195
Packing unit	10 pc
Minimum order quantity	1 pc
Sales key	BF68
Product key	AF7DBX
GTIN	4046356923262
Weight per piece (including packing)	14.36 g
Weight per piece (excluding packing)	13 g
Customs tariff number	74198090
Country of origin	TR



1411195

https://www.phoenixcontact.com/us/products/1411195

### Technical data

### Mounting

Assembly note	Mount screw connection flange in the housing using the correct torque 2) Insert cable 3) Tighten union nut using the correct torque
	Method 1 Cut the outer sheath, but do not remove it. Feed the cable through the screw connection and then remove the outer sheath. Now pull the cable back until the connection is established between the cable shield and the contact spring.
	Method 2 Push the braided shield back around 15 20 mm over the outer sheath. Insert the cables into the screw connection until the connection is established between the cable shield and the contact spring.

### Product properties

Product type	Cable screw gland
Application	EMC
No. of conductors	1
Manufacturer	BIMED
Manufacturer Designation	BSEM-01
Shielded	yes

### Characteristics

Cable diameter without cable sheath
-------------------------------------

### **Dimensions**

Dimensional drawing	
Length	27 mm
Length of the connecting thread	6 mm
Hole diameter	12.6 mm 12.7 mm
Wrench size, union nut	14 mm
Wrench size, support	14 mm
Hexagon angular dimension	15.5 mm
Thread type connection side	Pg7

### Connection data

Tightening torque	5 Nm (Union nut: EN 62444)
	3 Nm (Support: EN 62444)



1411195

https://www.phoenixcontact.com/us/products/1411195

### Material specifications

Color	brass color
Material Compression ring	PA 6
Seal material O-ring	Perbunan
Seal material Cable seal	CR
Material for screw connection	Brass, nickel-plated

### Cable/line

External cable diameter Cable 1	3 mm 6.5 mm
Halogen-free	no

### Environmental and real-life conditions

#### Ambient conditions

Degree of protection	IP68
Ambient temperature (operation)	-40 °C 100 °C (static)




https://www.phoenixcontact.com/us/products/1411195




### Drawings

### Dimensional drawing

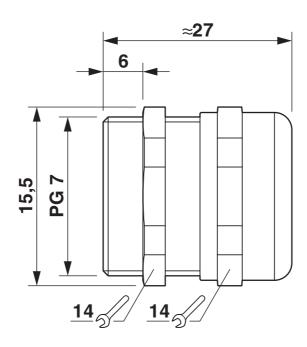

### Dimensional drawing

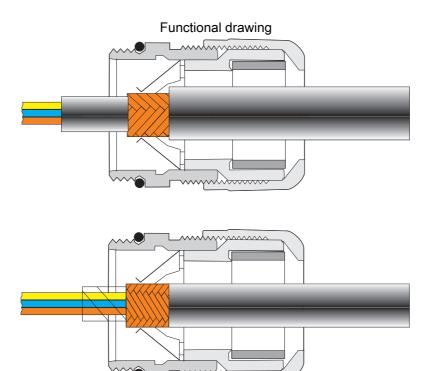

See assembly instruction



1411195

https://www.phoenixcontact.com/us/products/1411195

### **Approvals**

🌣 To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1411195

DNV

Approval ID: TAE00003WY



1411195

https://www.phoenixcontact.com/us/products/1411195

### Classifications

### **ECLASS**

	ECLASS-13.0	27140801
	ECLASS-15.0	27140801
ΕI	ГІМ	
	ETIM 9.0	EC000441
1 11	NSPSC	
UI	NOFOC	
	UNSPSC 21.0	39121300



1411195

https://www.phoenixcontact.com/us/products/1411195

### Environmental product compliance

#### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	b992bab1-7eea-4889-8ad7-d4e55ef55bb7

Phoenix Contact 2025 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com