

1453450

<https://www.phoenixcontact.com/us/products/1453450>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Connector, Range of articles: ArcZero, color: black, number of positions: 3, min. conductor cross-section: 1.5 mm², max. conductor cross-section: 6 mm², rated voltage: 800 VDC, rated current: 20 A, Connection method: Screw connection, min. cable diameter: 8 mm, max. cable diameter: 21 mm, Maximum load when disconnecting: 16 kW, scope: DC grid

Your advantages

- Safe connection and disconnection under load
- Fast disconnection of flying leads
- Time-saving maintenance or replacement of connected devices
- Robust outdoor design even for extreme conditions
- Particularly durable and economical

Commercial data

Item number	1453450
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	AB03
Product key	ABLFBA
GTIN	4063151841805
Weight per piece (including packing)	128 g
Weight per piece (excluding packing)	104.23 g
Customs tariff number	85366990
Country of origin	DE

CBC-PRC 3-FC-MS6 8-21 800V - Connector



1453450

<https://www.phoenixcontact.com/us/products/1453450>

Technical data

Notes

Note on application	Maximum load when disconnecting: 16 kW (6.7 μ F/5 mH)
Note on application	Maximum load when connecting: 2 kW (6.7 μ F/5 mH)
Note on application	Observe the specifications of the packing slip.
Notes on safety	Fit the protective cap when not plugged in.

Product properties

Product type	Installation connector
Product family	ArcZero
Area of application	DC grid
Number of positions	3

Insulation characteristics

Protection class	II (plastic housing)
------------------	----------------------

Electrical properties

Nominal voltage ATD	800 VDC (III/2.00) in accordance with IEC 61984
	250 VDC Minimum system voltage
	500 VDC (III/2.00) in accordance with IEC 61535
	600 VDC (III/2.00) in accordance with UL 2238 / UL 2237
Rated current	20 A (With 2.5 mm ² conductor cross-section in accordance with IEC 61984)

Dimensions

Width	37.6 mm
Height	37.6 mm
Length	129 mm

Material specifications

Color (Housing)	black (RAL 9005)
Material Housing	PPE

Cable/line

External cable diameter	8 mm ... 21 mm
Single wire, cross section	1.5 mm ² 6 mm ²
Stripping length of the individual wire	13 mm (Lay PE conductor 10 mm leading)
Halogen-free	yes (in accordance with IEC 61249-2-21:2003- 11 Cl.3.1)

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	500 (under rated load)
-----------------------------	------------------------

CBC-PRC 3-FC-MS6 8-21 800V - Connector



1453450

<https://www.phoenixcontact.com/us/products/1453450>

Environmental and real-life conditions

Ambient conditions


Degree of protection	IP66
	IP68 (2 m / 2 h)
	IP69
Ambient temperature (operation)	-40 °C ... 105 °C (observe derating)
Ambient temperature (storage/transport)	-40 °C ... 105 °C
Ambient temperature (assembly)	-20 °C ... 60 °C

Standards and regulations

Standards/specifications	IEC 61984
	IEC TS 62735-1

Drawings

Diagram

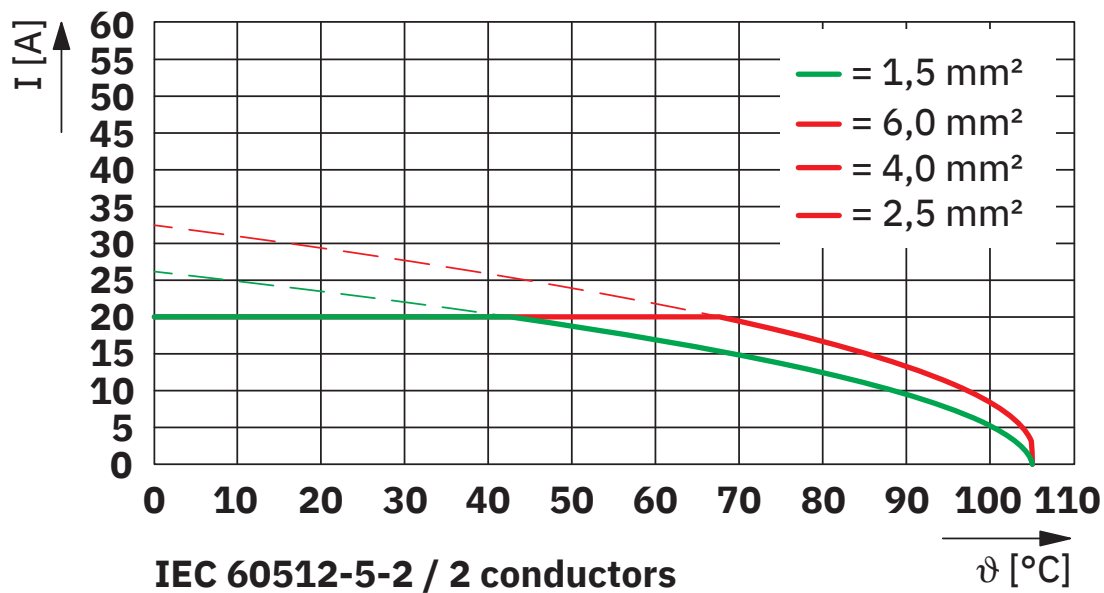

Derating

CBC-PRC 3-FC-MS6 8-21 800V - Connector




1453450

<https://www.phoenixcontact.com/us/products/1453450>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1453450>

<div> VDE Zeichengenehmigung Approval ID: 304284-TL3-1</div>				
	Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
keine				
	800 V	20 A	-	1.5 - 6

CBC-PRC 3-FC-MS6 8-21 800V - Connector



1453450

<https://www.phoenixcontact.com/us/products/1453450>

Classifications

ECLASS

ECLASS-13.0	27440605
ECLASS-15.0	27440605

ETIM

ETIM 9.0	EC002560
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

CBC-PRC 3-FC-MS6 8-21 800V - Connector



1453450

<https://www.phoenixcontact.com/us/products/1453450>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	Triphenyl phosphate(CAS: 115-86-6)

Phoenix Contact 2025 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com