

1606701

https://www.phoenixcontact.com/us/products/1606701

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



M23, Cable connector, series: UC, straight, shielded: yes, Screw locking mechanism, No. of pos.: 16+3, Direction of rotation: Standard, contact connection type: Socket, Solder cup, cable diameter range: 2 mm ... 14.5 mm, coding: N. This product is in the process of being discontinued. This product must no longer be considered for new projects. Please contact your sales representative for alternatives.

Commercial data

Item number	1606701
Packing unit	20 pc
Minimum order quantity	1 pc
Sales key	AB31
Product key	ABRAIA
GTIN	4046356261296
Weight per piece (including packing)	128.6 g
Weight per piece (excluding packing)	111.998 g
Customs tariff number	85366990
Country of origin	DE



1606701

https://www.phoenixcontact.com/us/products/1606701

Technical data

Product properties

Product type	Circular connector (cable-side)
Product type	Circular connector (cable-side)

Connector

Insulating body

Coding	N
Material (Insulating body)	PA 6.6
Material (Contact)	CuZn
Material (Contact surface)	Ni/Au
Insertion/withdrawal cycles	100
Connection method	Solder cup
Contact switching type	Socket
Application	Signal
Number of positions	19
Direction of rotation	Standard
Connection profile	16+3
Number Contact (Contact group 1)	3
Diameter Contact (Contact group 1)	1.5 mm
Litz wire cross-section min. Contact (Contact group 1)	0.08 mm ²
Litz wire cross-section max. Contact (Contact group 1)	1 mm²
Rated current Contact (Contact group 1)	10 A (for max. connection cross section)
Rated voltage Contact (Contact group 1)	48 V AC
	74 V DC
Rated surge voltage	1.5 kV
Overvoltage category	III
Degree of pollution	3
Number Contact (Contact group 2)	16
Diameter Contact (Contact group 2)	1 mm
Litz wire cross-section min. Contact (Contact group 2)	0.08 mm ²
Litz wire cross-section max. Contact (Contact group 2)	1 mm²
Rated current Contact (Contact group 2)	8 A
Number Contact (Contact group 3)	1
Diameter Contact (Contact group 3)	1.5 mm
Rated current Contact (Contact group 3)	8 A

Housing

3 · · · · · · · · · · · · · · · · · · ·	
Туре	Cable connector housing
Thread type	M23
Design	straight
Type of locking	Screw locking mechanism
Pg screw connection	Pg13,5



1606701

https://www.phoenixcontact.com/us/products/1606701

Material (Housing)	GD-Zn
Material (Rotating parts)	CuZn
Material (Housing surface)	Ni
Material (Seal)	FPM (O-ring)
Degree of protection (plugged in)	IP67
Seal	
External cable diameter	2 mm 14.5 mm
Seal material	NBR




https://www.phoenixcontact.com/us/products/1606701



Drawings

Schematic diagram

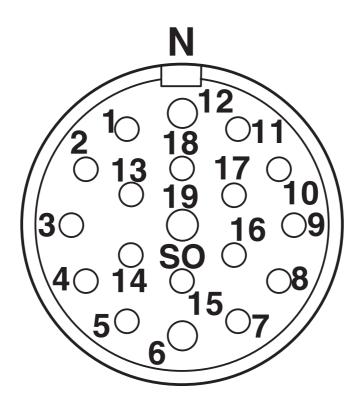


Connector pin assignment



https://www.phoenixcontact.com/us/products/1606701



Schematic diagram

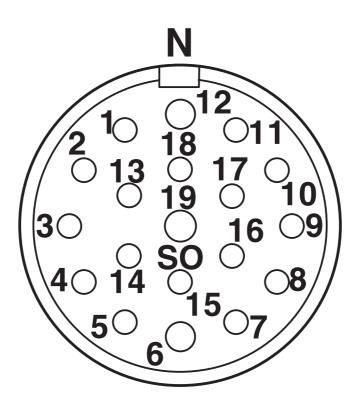


Connector pin assignment



1606701

https://www.phoenixcontact.com/us/products/1606701

Schematic diagram

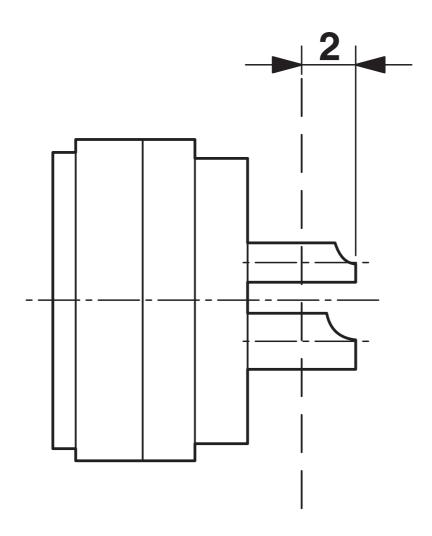


Dimensional drawing



1606701

https://www.phoenixcontact.com/us/products/1606701

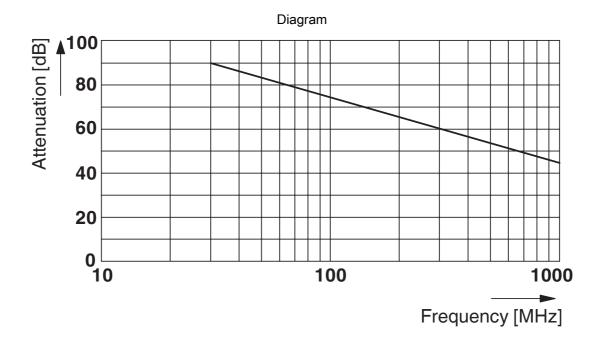



1606701

https://www.phoenixcontact.com/us/products/1606701

Classifications

ECLASS

	ECLASS-13.0	27440116
	ECLASS-15.0	27440116
ETIM		
	ETIM 9.0	EC002635
	ICDCC	
Uľ	NSPSC	
	UNSPSC 21.0	39121400



1606701

https://www.phoenixcontact.com/us/products/1606701

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	9b3f5bf4-79b5-46a1-a350-d72211adbca6

Phoenix Contact 2025 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com