

1606801

https://www.phoenixcontact.com/us/products/1606801

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



M23, Cable connector, series: UC, angled, shielded: yes, Screw locking mechanism, No. of pos. : 6+3, Direction of rotation: Standard, contact connection type: Socket, Solder cup, cable diameter range: 2 mm ... 14.5 mm, coding: N. This product is in the process of being discontinued. This product must no longer be considered for new projects. Please contact your sales representative for alternatives.

Commercial data

Item number	1606801
Packing unit	8 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Product key	ABRAIC
GTIN	4046356261999
Weight per piece (including packing)	163.81 g
Weight per piece (excluding packing)	155.339 g
Country of origin	DE



1606801

https://www.phoenixcontact.com/us/products/1606801

Technical data

Product properties

Product type	Circular connector (cable-side)
--------------	---------------------------------

Connector

Insulating body

Coding	N
Material (Insulating body)	PBT
Material (Contact)	CuZn
Material (Contact surface)	Ni/Au
Insertion/withdrawal cycles	50
Connection method	Solder cup
Contact switching type	Socket
Application	Signal
Number of positions	9
Direction of rotation	Standard
Connection profile	6+3
Number Contact (Contact group 1)	3
Diameter Contact (Contact group 1)	2 mm
Litz wire cross-section min. Contact (Contact group 1)	0.08 mm²
Litz wire cross-section max. Contact (Contact group 1)	2.5 mm²
Rated current Contact (Contact group 1)	20 A (for max. connection cross section)
Rated voltage Contact (Contact group 1)	48 V AC
	74 V DC
Rated surge voltage	1.5 kV
Overvoltage category	III
Degree of pollution	3
Number Contact (Contact group 2)	6
Diameter Contact (Contact group 2)	1 mm
Litz wire cross-section min. Contact (Contact group 2)	0.08 mm²
Litz wire cross-section max. Contact (Contact group 2)	1 mm²
Rated current Contact (Contact group 2)	8 A

Housing

Troubing	
Туре	Cable connector housing
Thread type	M23
Design	angled
Type of locking	Screw locking mechanism
Pg screw connection	none
Material (Housing)	GD-Zn
Material (Rotating parts)	CuZn
Material (Housing surface)	Ni
Material (Housing surface)	Ni



1606801

https://www.phoenixcontact.com/us/products/1606801

Material (Seal)	FPM (O-ring)
Degree of protection (plugged in)	IP67
Seal	
Seal External cable diameter	2 mm 14.5 mm




https://www.phoenixcontact.com/us/products/1606801



Drawings

Schematic diagram

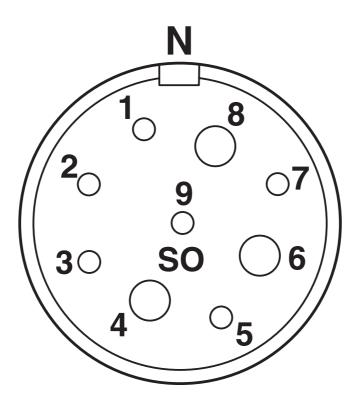


Connector pin assignment



https://www.phoenixcontact.com/us/products/1606801



Schematic diagram

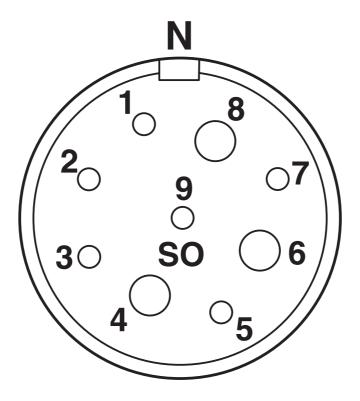


Connector pin assignment



https://www.phoenixcontact.com/us/products/1606801



Schematic diagram

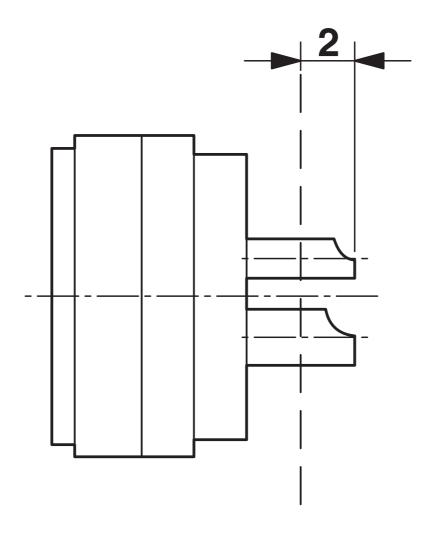


Dimensional drawing



1606801

https://www.phoenixcontact.com/us/products/1606801

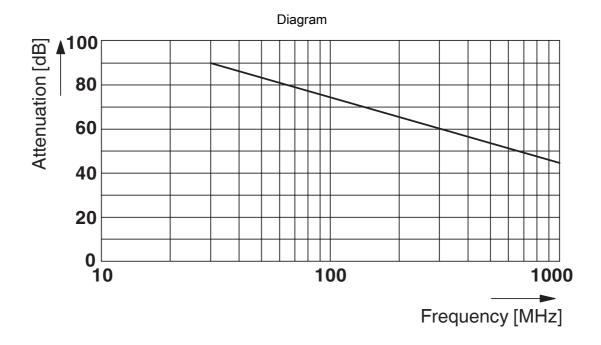



1606801

https://www.phoenixcontact.com/us/products/1606801

Classifications

ECLASS

	ECLASS-13.0	27440116
	ECLASS-15.0	27440116
ETIM		
	ETIM 9.0	EC002635
UN	NSPSC	
О.	101 00	
	UNSPSC 21.0	39121400



1606801

https://www.phoenixcontact.com/us/products/1606801

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	0997048e-a15c-4bee-8dce-e71148120075

Phoenix Contact 2025 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com