

1613566

https://www.phoenixcontact.com/us/products/1613566

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector front mounting, angled rotatable, SPEEDCON, M17, number of positions: 6+PE, contact connection type: Pin, Axial O-ring, 4x Ø 2.7 mm, shielded: yes, flange dimensions: 25 mm x 25 mm, number of positions: 7, connection method: Crimp connection, series: ST

Commercial data

Item number	1613566
Packing unit	1 pc
Note	Made to order (non-returnable)
Sales key	AB35
Product key	ABRBEM
GTIN	4046356401166
Weight per piece (including packing)	100.187 g
Weight per piece (excluding packing)	88.98 g
Customs tariff number	85366990
Country of origin	DE



1613566

https://www.phoenixcontact.com/us/products/1613566

Technical data

Notes

Order information:	Order crimp contacts Ø 1 mm separately
Safety note	
Safety note	WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.
	WARNING: Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible.
	WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.
	The products are suitable for applications in plant, controller, and electrical device engineering.
	 When operating the connectors in outdoor applications, they must be separately protected against environmental influences.
	 Assembled products may not be manipulated or improperly opened.
	 Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products).
	 When using the product in direct connection with third-party manufacturers, the user is responsible.
	 For operating voltages > 50 V AC, conductive connector housings must be grounded
	 Ensure that the protective or functional ground has been properly connected.
	 VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector
	Only use tools recommended by Phoenix Contact
	 The installation notes/Design In documents online on the download page at phoenixcontact.com/products must be observed for this product.
	 Operate the connector only when it is fully plugged in and interlocked.
	 Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards.
	 Observe the minimum bending radius of the cable. Lay the cable without twisting it.
	The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting



1613566

https://www.phoenixcontact.com/us/products/1613566

	warnings (e.g. DIN EN ISO 13732-1:2008-12).
Product properties	
Product type	Circular connectors (device side)
Series	ST
Application	Power
Number of positions	7
Connection profile	6+PE
Shielded	yes
Coding	N
Thread type	M17
Dimensions	
Housing	
Flange dimensions	25 mm x 25 mm
laterial specifications	
Seal material	FPM
Housing material	Metal
Housing material	Turned parts: copper zinc alloy (CuZn), die-cast parts: zinc (GD-Zn)
Insulator material	PA 6.6
Gasket and O-ring material	FPM
Electrical properties Contact: Contact group 1	
Contact diameter	1 mm
Nominal current I _N	14 A
Nominal voltage U _N	630 V
Overvoltage category	III
Degree of pollution	3
Rated surge voltage	6 kV
Contact: Contact group 2	
Contact diameter	1 mm
Connection data	
Conductor connection	200000000000000000000000000000000000000
Connection method	Crimp connection
Contact connection type	Pin
Connector	
Туре	angled rotatable
Direction of rotation	Standard



1613566

https://www.phoenixcontact.com/us/products/1613566

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP67
Ambient temperature (operation)	-40 °C 125 °C
Altitude	3000 m




1613566


https://www.phoenixcontact.com/us/products/1613566

Drawings

Dimensional drawing

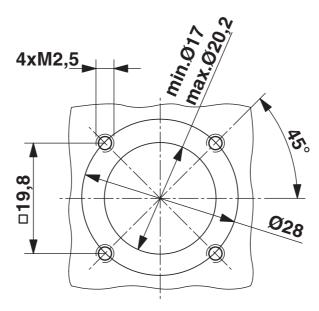

Dimensional drawing

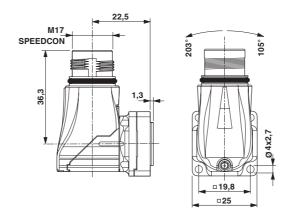





1613566

https://www.phoenixcontact.com/us/products/1613566

Schematic diagram

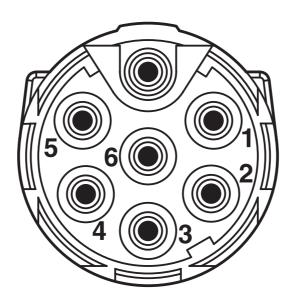

Connector pin assignment

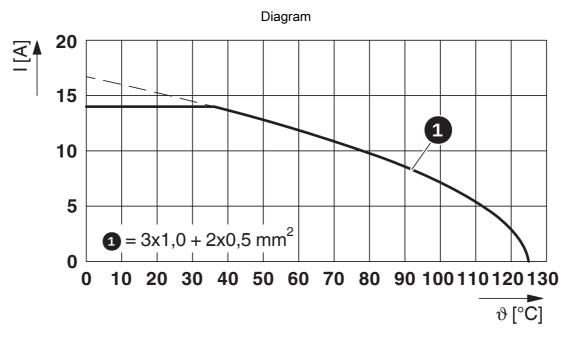

I = current strength, ϑ = ambient temperature, 3x 14 A + 2x 2 A constant



1613566

https://www.phoenixcontact.com/us/products/1613566

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2025 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com