

1619639

https://www.phoenixcontact.com/us/products/1619639

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Your advantages

- Safe use in the field, thanks to high degree of protection
- · Connector for flexible on-site assembly
- · Consistent EMC protection for reliable transmission of signals
- Solder connection: proven connection technology for various litz wires

Commercial data

Item number	1619639
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	AB31
Product key	ABRAEA
GTIN	4046356822398
Weight per piece (including packing)	94.94 g
Weight per piece (excluding packing)	88.492 g
Customs tariff number	85366990
Country of origin	DE



1619639

https://www.phoenixcontact.com/us/products/1619639

Technical data

Product properties

Product type	Circular connector (cable-side)
--------------	---------------------------------

Connector

Connection 1

Head design	Socket		
Insulating body			
Coding	N		
Material (Insulating body)	PBT		
Material (Contact)	CuZn		
Material (Contact surface)	Ni/Au		
Insertion/withdrawal cycles	100		
Connection method	Solder connection		
Contact switching type	Socket		
Application	Signal		
Number of positions	17		
Direction of rotation	Standard		
Connection profile	17		
Number Contact (Power contacts)	0		
Rated voltage Contact (Power contacts)	48 V AC		
	74 V DC		
Rated surge voltage	1.5 kV		
Overvoltage category	III		
Degree of pollution	3		
Number Contact (Signal contacts)	17		
Diameter Contact (Signal contacts)	1 mm		
Litz wire cross-section max. Contact (Signal contacts)	1 mm²		
Rated current Contact (Signal contacts)	8 A		

Housing

Туре	Cable connector housing
Thread type	M23
Design	straight
Type of locking	Screw locking mechanism
Pg screw connection	none
Housing material	Turned parts: copper zinc alloy (CuZn), die-cast parts: zinc (GD-Zn)
Material for screw connection	CuZn
Degree of protection (plugged in)	IP67

Seal



1619639

https://www.phoenixcontact.com/us/products/1619639

External cable diameter	10 mm 14.5 mm
Seal material	NBR
Environmental and real-life conditions	
Ambient conditions	
Ambient temperature (operation)	-40 °C 125 °C




https://www.phoenixcontact.com/us/products/1619639



Drawings

Schematic diagram

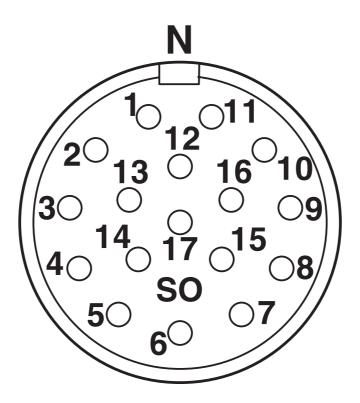


Connector pin assignment



https://www.phoenixcontact.com/us/products/1619639



Schematic diagram

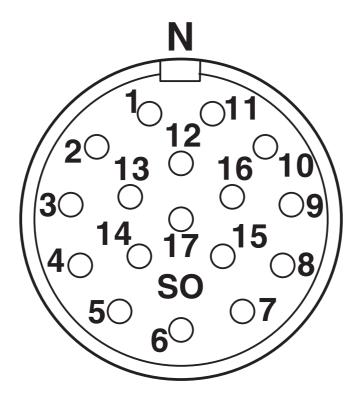

Connector pin assignment



1619639

https://www.phoenixcontact.com/us/products/1619639

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1619639

.71	cUL Recognized Approval ID: E335019-20141210				
		Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
keine					
		48 V	5 A	18	-

7/1	UL Recognized Approval ID: E335019-20141210			
	Nominal voltage U_N	Nominal current I _N	Cross section AWG	Cross section mm ²
keine				
	48 V	8 A	18	-



1619639

https://www.phoenixcontact.com/us/products/1619639

Classifications

UNSPSC 21.0

ECLASS

	ECLASS-13.0	27440116
	ECLASS-15.0	27440116
ETIM		
	ETIM 9.0	EC002635
UNSPSC		

39121400



1619639

https://www.phoenixcontact.com/us/products/1619639

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	8b917c0d-9601-47eb-9576-e2672963ff80

Phoenix Contact 2025 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com