

EV-T2SC - Protective cover

1627780

<https://www.phoenixcontact.com/us/products/1627780>



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



CHARX connect basic, Type 2, Protective cover, Accessories, square, Front mounting, M5 thread, housing: black, with self-locking mechanism, for attaching to infrastructure charging sockets, Embossed PHOENIX CONTACT logo, IEC 62196-2, Special packaging quantity

Product description

Self-closing protective cover for infrastructure charging socket

Your advantages

- Developed and produced in accordance with the IATF 16949 automotive standard and ISO 9001
- Individual branding, thanks to the use your own logo
- Reliable protection of your socket outlet from weather and vandalism

Commercial data

Item number	1627780
Packing unit	10 pc
Minimum order quantity	10 pc
Product key	XWBFAC
GTIN	4055626355245
Weight per piece (including packing)	119.063 g
Weight per piece (excluding packing)	122 g
Country of origin	PL

EV-T2SC - Protective cover

1627780

<https://www.phoenixcontact.com/us/products/1627780>



Technical data

Notes


General	Special packaging quantity
---------	----------------------------

Product properties


Product type	Protective cover for Socket Outlet
Product family	CHARX connect basic
Application	for attaching to infrastructure charging sockets
Type	square
Design	with self-locking mechanism
Compatibility	The square basic protective cover version is not compatible with the shutter. Choose a premium and/or round protective cover version for this.
Charging standard	Type 2
Charging mode	Mode 3, Case B
Affixed logo	Embossed PHOENIX CONTACT logo
Customer variations	On request

Dimensions

Protective cover

Dimensional drawing	
Width	85 mm
Height	93.7 mm
Depth	32.5 mm

Bore dimensions

Dimensional drawing	
Width	60 mm
Height	60 mm

Material specifications

Color (Housing)	black (9005)
Material (Housing)	Plastic

EV-T2SC - Protective cover

1627780

<https://www.phoenixcontact.com/us/products/1627780>



Mechanical properties

Type of cover movement	Self-locking
------------------------	--------------

Environmental and real-life conditions

Ambient conditions

Degree of protection (Protective cover)	IP54
	IK08
Ambient temperature (operation)	-30 °C ... 50 °C
Ambient temperature (storage/transport)	-40 °C ... 80 °C
Altitude	5000 m (above sea level)

Standards and regulations

Standards

Standards/regulations	IEC 62196-2
-----------------------	-------------

Mounting

Mounting type Protective cover	Front mounting (rear screw connection)
Fixing screws	M5 thread

EV-T2SC - Protective cover


1627780

<https://www.phoenixcontact.com/us/products/1627780>



Drawings

Dimensional drawing

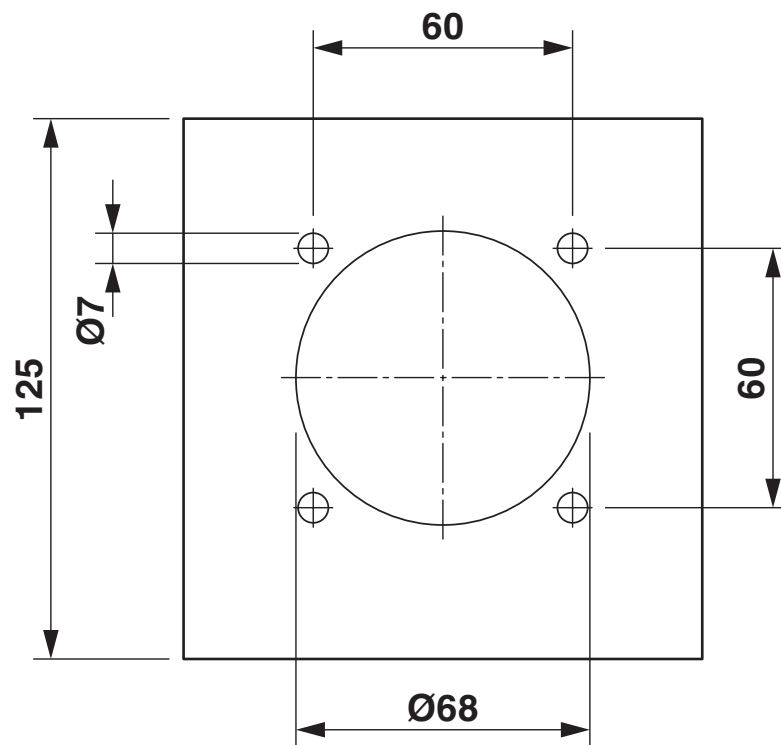


EV-T2SC - Protective cover

1627780

<https://www.phoenixcontact.com/us/products/1627780>



Dimensional drawing

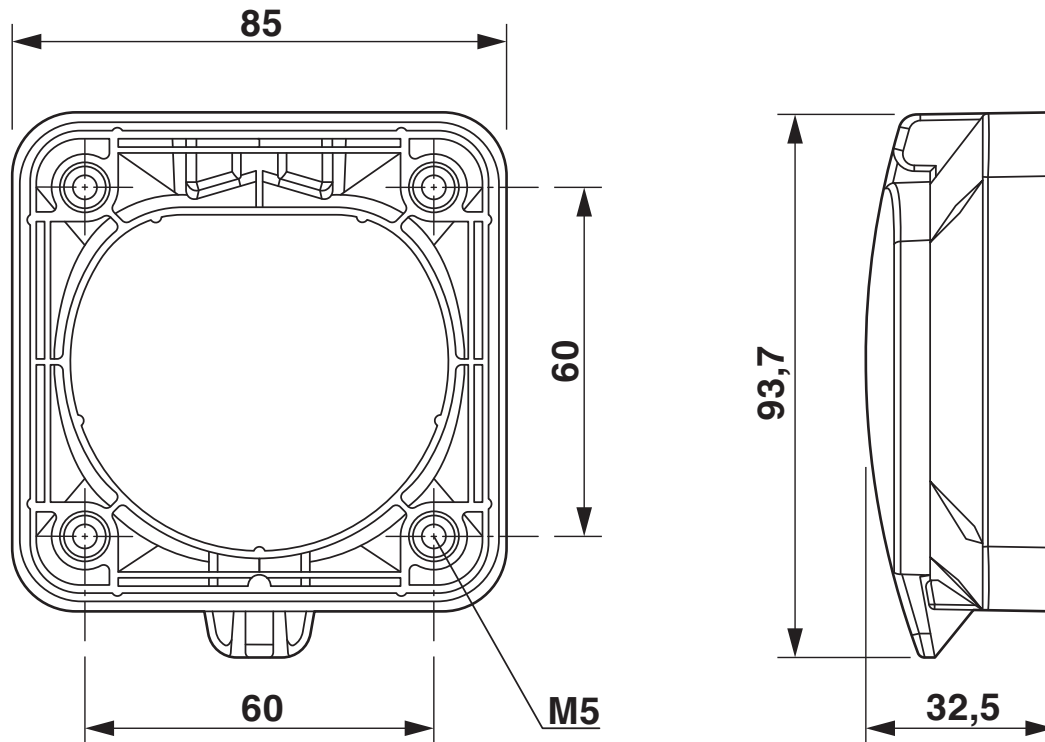


EV-T2SC - Protective cover

1627780

<https://www.phoenixcontact.com/us/products/1627780>



Schematic diagram

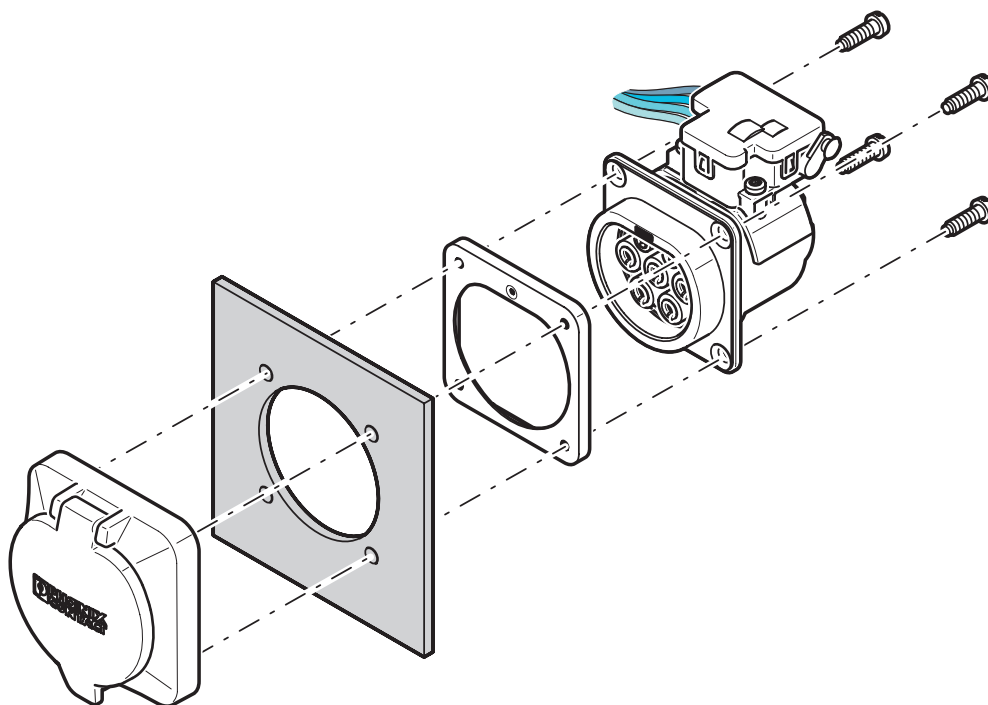

Rear mounting with rear protective cover screw connection

The screw connection for a protective cover from the accessories range (EV-T2SC) only supports rear mounting. The panel thickness must not exceed 5 mm. The sealing frame that is slid on from the rear must contact the housing panel flush with the flat side and must completely surround the infrastructure socket outlet.


EV-T2SC - Protective cover

1627780

<https://www.phoenixcontact.com/us/products/1627780>



Schematic diagram

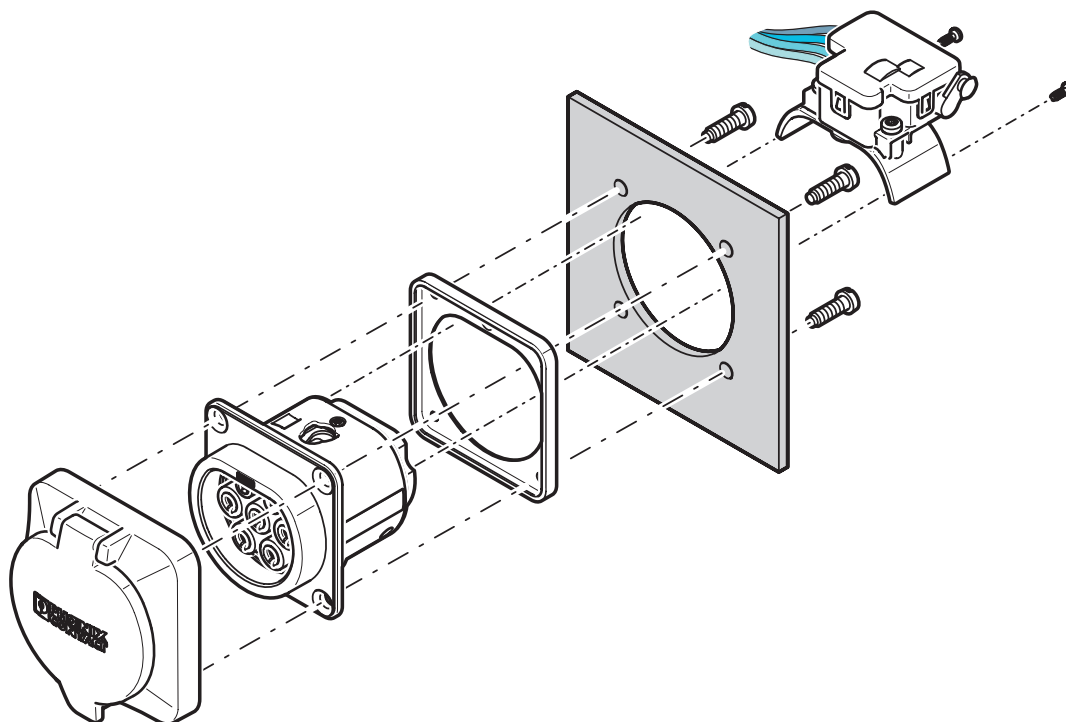

Front mounting with rear protective cover screw connection

Front mounting is only possible when the locking actuator is removed. We recommend using an infrastructure socket outlet without pre-assembled locking actuator (EV-T2M3SE-...E0..., e.g., 1621729).

The screw connection for a protective cover from the accessories range (EV-T2SC) only supports rear mounting. The panel thickness must not exceed 10 mm. The sealing frame that is slid on from the front must contact the housing panel flush with the flat side and must completely surround the infrastructure socket outlet.

EV-T2SC - Protective cover

1627780

<https://www.phoenixcontact.com/us/products/1627780>



Classifications

ECLASS

ECLASS-13.0	27144792
ECLASS-15.0	27144792

ETIM

ETIM 9.0	EC002884
----------	----------

UNSPSC

UNSPSC 21.0	39121500
-------------	----------

EV-T2SC - Protective cover

1627780

<https://www.phoenixcontact.com/us/products/1627780>



Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2025 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com