

1694240

https://www.phoenixcontact.com/us/products/1694240

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Device connector rear mounting, 5-position, Socket, angled, M12, A-coding, Wave soldering



Commercial data

Item number	1694240
Packing unit	10 pc
Minimum order quantity	1 pc
Sales key	AB23
Product key	ABQEHI
GTIN	4017918177522
Weight per piece (including packing)	14.54 g
Weight per piece (excluding packing)	11.1 g
Customs tariff number	85366990
Country of origin	DE



1694240

https://www.phoenixcontact.com/us/products/1694240

Technical data

Mounting

Mounting type	Rear mounting (M12 x 1, with locking nut)			
Product properties				
Product type	Circular connectors (device side)			
Number of positions	5			
Shielded	no			
Coding	A			
Thread type	M12			
Insulation characteristics				
Overvoltage category	II			
Degree of pollution	3			

Material specifications

Material Housing	CuZn
Material Housing surface	Ni
Material Insulating body	PA 6.6
Material Contact	CuZn
Material Contact surface	Au
Material Seal	NBR
Flammability rating according to UL 94	НВ

Electrical properties

Contact resistance	≤ 5 mΩ
Insulation resistance	≥ 100 MΩ
Nominal voltage U _N	60 V
Nominal current I _N	4 A

Connection data

Conductor connection

Connection method	Wave soldering	
Contact connection type	Socket	

Connector

Connection 1

Head design	Socket
Head cable outlet	angled
Head thread type	M12
Coding	A



1694240

https://www.phoenixcontact.com/us/products/1694240

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP67
Ambient temperature (operation) (male connector/female connector)	-25 °C 85 °C (Plug / socket)
UL Type Rating	Type 4 (indoor use only)

Standards and regulations


Standard designation	M12 circular connector	
Standards/specifications	according to IEC 61076-2-101	



1694240

https://www.phoenixcontact.com/us/products/1694240

Drawings

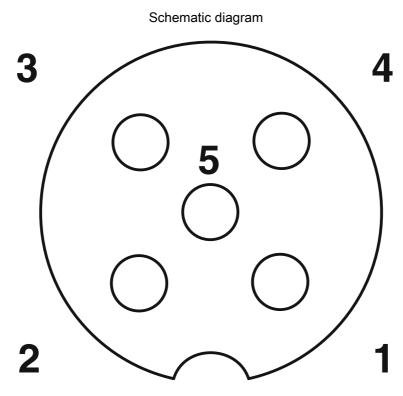

Pin assignment M12 socket, 5-pos., A-coded, socket side view



1694240

https://www.phoenixcontact.com/us/products/1694240

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1694240

. 91	cUL Recognized Approval ID: FILE E 221474				
		Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
keine					
		60 V	4 A	-	-

7.1	UL Recognized Approval ID: FILE E 221474				
		Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
keine					
		60 V	4 A	-	-

<i>71</i>	UL Recognized Approval ID: E221474-20070307				
		Nominal voltage U_N	Nominal current I _N	Cross section AWG	Cross section mm ²
keine					
		60 V	4 A	-	-

. 51 2	cUL Recognized Approval ID: E221474-20070307					
	Nominal voltage U _N Nominal current I _N Cross section AWG Cross section mm ²					
keine						
		60 V	4 A	-	-	



1694240

https://www.phoenixcontact.com/us/products/1694240

Classifications

ECLASS

	ECLASS-13.0	27440110
	ECLASS-15.0	27440110
ETIM		
	ETIM 9.0	EC003568
UNSPSC		
	UNSPSC 21.0	39121400



1694240

https://www.phoenixcontact.com/us/products/1694240

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	7a9b8d80-2aae-4f37-a126-df3c052b3fb9

Phoenix Contact 2025 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com