

2942975

https://www.phoenixcontact.com/us/products/2942975

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Electronic housing set, consisting of electronic housing and printed circuit termination blocks, pitch 5

### Commercial data

Item number	2942975
Packing unit	10 pc
Minimum order quantity	1 pc
Sales key	AC11
Product key	ACHCBA
GTIN	4017918080938
Weight per piece (including packing)	28.8 g
Weight per piece (excluding packing)	28.8 g
Customs tariff number	85369010
Country of origin	DE



https://www.phoenixcontact.com/us/products/2942975



#### Set consists of

### EMG 15-LG - Electronics housing

2908508

https://www.phoenixcontact.com/us/products/2908508



Electronic housing, with universal foot, for PCB insertion, without screw connection terminal blocks and cover

#### MKDS 3/3-EMG 15 - PCB terminal block

1712698

https://www.phoenixcontact.com/us/products/1712698



Printed circuit board terminal, nominal current: 24 A, rated voltage (III/2): 400 V, nominal cross section: 2.5 mm², number of potentials: 3, number of rows: 1, number of positions per row: 3, product range: MKDS 3, pitch: 4.7 mm, connection method: Screw connection with tension sleeve, screw head form: L Slotted, mounting: Wave soldering, conductor/PCB connection direction: 0 °, color: green, Pin layout: Linear pinning, Solder pin [P]: 5 mm, number of solder pins per potential: 1, type of packaging: packed in cardboard. Matches EMG 15 component housing



https://www.phoenixcontact.com/us/products/2942975




### Technical data

### Product properties

Product type	Stackable housing set
Housing type	Component housing
Housing series	EMG
Product family	EMGLG
Туре	Lower housing part, removable cover as option, connection system integrated
Number of positions	6
Pitch	5 mm
Ventilation openings present	no

### **Dimensions**

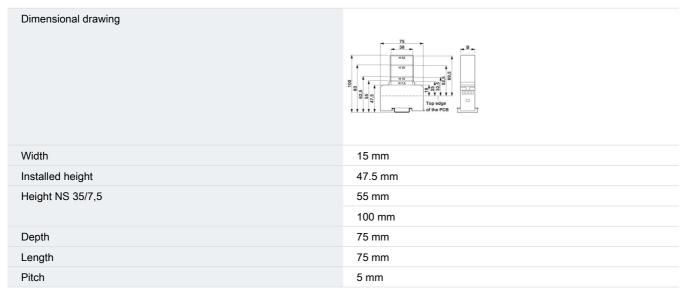

### Material specifications

Color (Housing)	green (RAL 6021)
Material Housing	PC (glass-fiber reinforced)
Flammability rating according to UL 94	V0
Surface characteristics	untreated

### Environmental and real-life conditions

#### Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-40 °C 125 °C


2942975

https://www.phoenixcontact.com/us/products/2942975



### Drawings

### Dimensional drawing

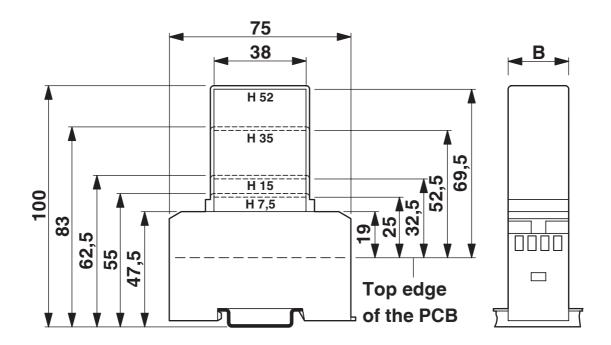


1 = Top edge of the PCB

B = Housing width



2942975

https://www.phoenixcontact.com/us/products/2942975

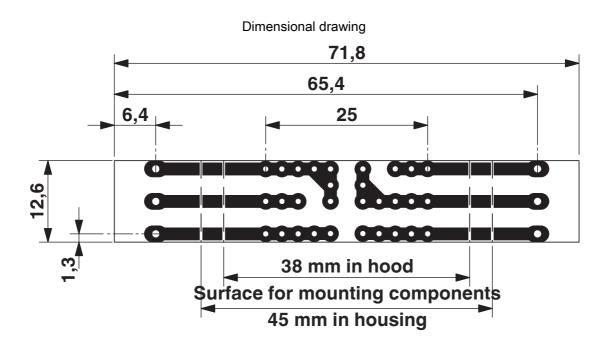

#### Pitch 5 mm

a = Area for mounting components, 38 mm in the hood

b = Area for mounting components, 45 mm in the housing



2942975

https://www.phoenixcontact.com/us/products/2942975

### Classifications

### **ECLASS**

	ECLASS-15.0	27190301			
	ECLASS-13.0	27190301			
ETIM					
	ETIM 9.0	EC001031			
UNSPSC					
	UNSPSC 21.0	31261500			

Nov 12, 2025, 5:35 ☐ AM Page 6 (7)



2942975

https://www.phoenixcontact.com/us/products/2942975

### Environmental product compliance

#### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	20e63a27-1e34-4196-84c5-c696b067f1ff

Phoenix Contact 2025 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com