



2 DI 24 V DC LC COM Control module for ET200S High Feature Starter for ET 200S Failsafe Starter for local input functions or for manual operation with COM interface for PC cable 6ED1057-1 AA00-0BA0


Substance Prohibitance (Date)	05/01/2012		
SVHC substance name	Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8 2,2',6,6'-tetrabromo-4,4'-isopropylidenediphenol - 79-94-7		
Weight	0.026 kg		
Electrical Safety			
protection class IP on the front according to IEC 60529	IP20		
touch protection on the front according to IEC 60529	finger-safe		
Ambient conditions			
ambient temperature	-40 ... +80 °C 0 ... 60 °C		
• during operation			
• during storage			
Approvals Certificates			
General Product Approval		EMV	other



other	Environment
Confirmation	Environmental Con- firmations

Further information

Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
Information for data generation and storage
<https://support.industry.siemens.com/cs/ww/en/view/109995012>
Information- and Downloadcenter (Catalogs, Brochures,...)
<https://www.siemens.com/ic10>
Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1903-0CH20>
Cax online generator
<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1903-0CH20>
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/ww/en/ps/3RK1903-0CH20>
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1903-0CH20&lang=en

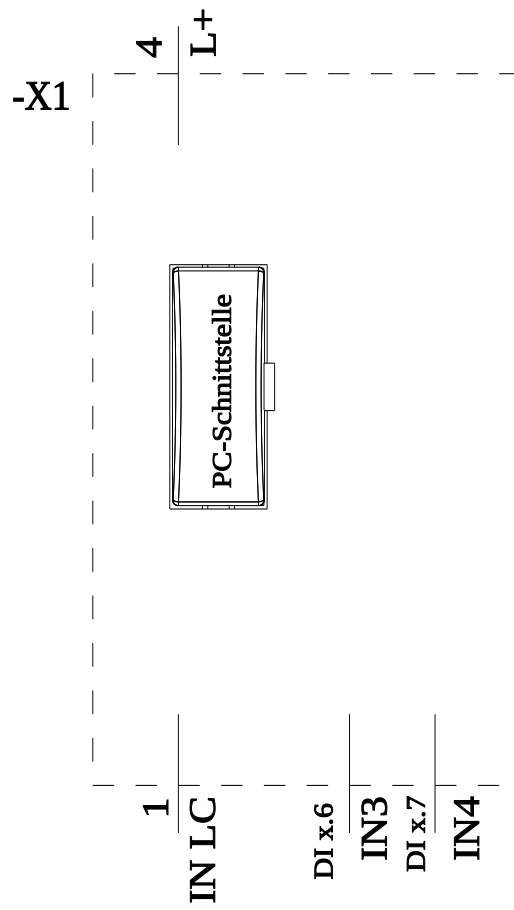

last modified:

4/2/2025 