

SVS VALVE PLUG FORM BI 11MM FIELD-WIREABLE

230V LED+VDR M16x1.5

Art.No.: 7000-29921-0000000

Weight: 0.05

Country of origin: CN

Model designation: MSVS-KB4X-M16

Form BI (11 mm)

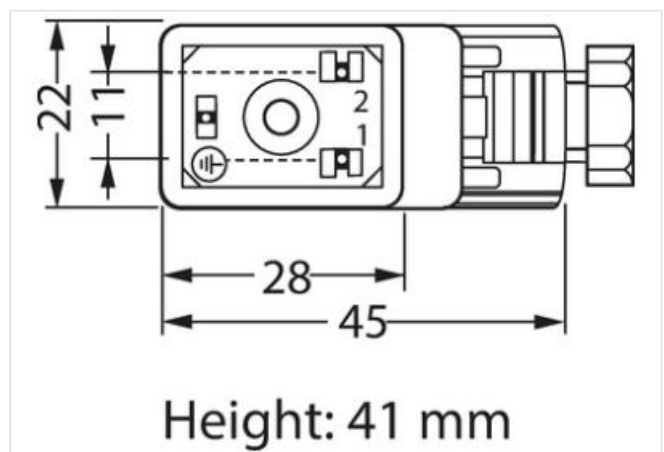
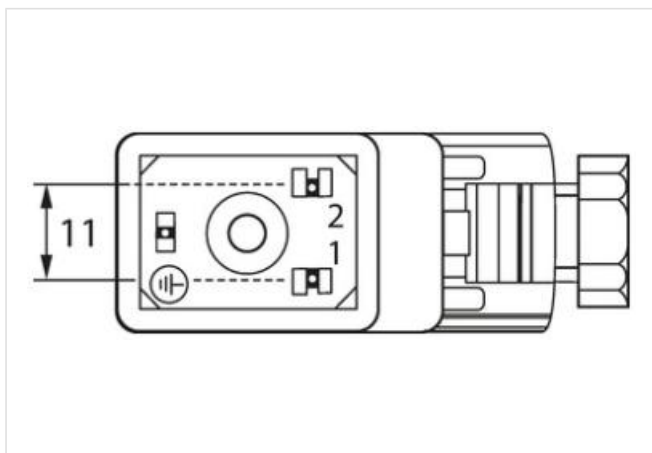
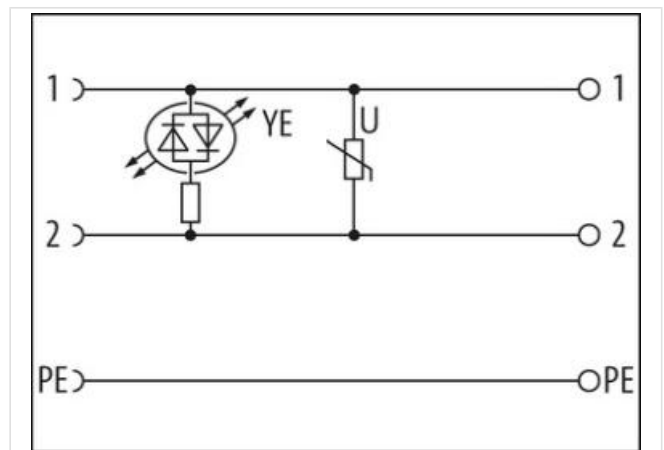
230 V AC/DC $\pm 10\%$

LED and VDR

metric

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**

Product may differ from Image

**Side 1**

Degree of protection (EN IEC 60529)

IP65

Commercial data	
ECLASS-6.0	27279221
ECLASS-6.1	27279221
ECLASS-7.0	27440104
ECLASS-8.0	27440104
ECLASS-9.0	27440105
ECLASS-10.1	27440105
ECLASS-11.1	27440105
ECLASS-12.0	27440105
ETIM-5.0	EC002062
customs tariff number	85366990
customs tariff number	85366990
GTIN	4048879187107
GTIN	4048879187107
Packaging unit	1
Packaging unit	1
Electrical data	
Drop-out delay time max.	15 ms
Holding power max.	50 W
Electrical data Supply	
Operating voltage AC	230 V
Operating voltage AC min.	207 V
Operating voltage AC max.	253 V
Operating voltage DC	230 V
Operating voltage DC min.	207 V
Operating voltage DC max.	253 V
Cut-off peak voltage max.	450 V
Current operating per contact max.	1 A
Current consumption max.	12 mA
Diagnostics	
Status indication LED	yellow
Installation	
Connection cross section max.	1,5 mm ²
Installation Connection	
Tightening torque	0,4 Nm
Mounting set	M16 x 1.5
Device protection Electrical	
Additional condition protection degree	inserted, locked, with screw connection
Mechanical data Mounting data	
fastening screw	M3
Clamping range min.	5 mm
Clamping range max.	10 mm
Environmental characteristics Climatic	
Operating temperature min.	-20 °C
Operating temperature max.	60 °C
Important installation notes	
Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.