

**MSUD valve plug B-10mm with cable**

PVC 3x0.75 bk 2.5m

Art.No.: 7000-10081-6160250

Weight: 0.171

Country of origin: CZ

Model designation: MSUDK-LB1Z-616\_2.5

MSUD

Form B (10 mm)

24 V AC  $\pm 20\%$  / DC  $\pm 25\%$ 



LED and suppression



PE opposite cable entry (180°)

Further cable lengths on request.


Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

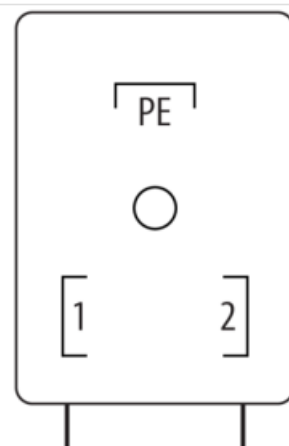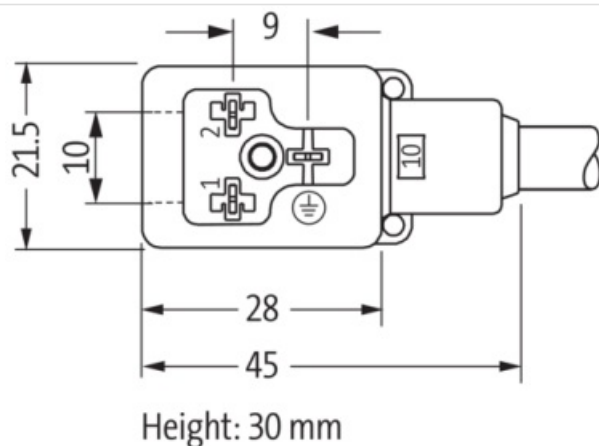[Link to Product](#)**Illustration**

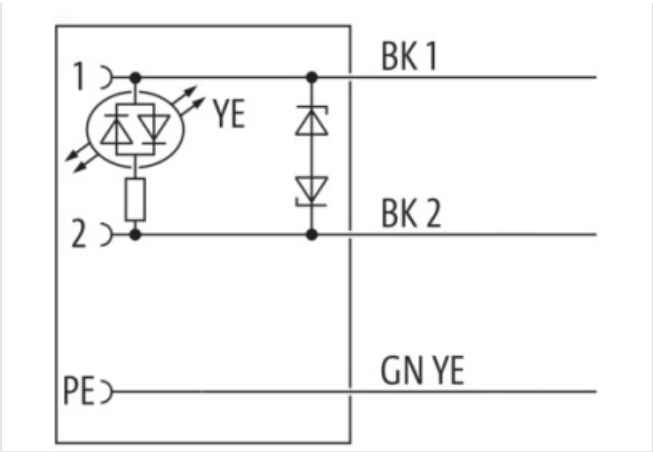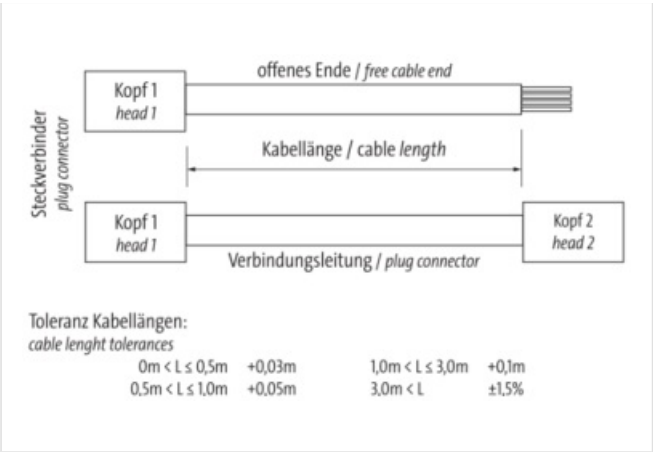

Product may differ from Image

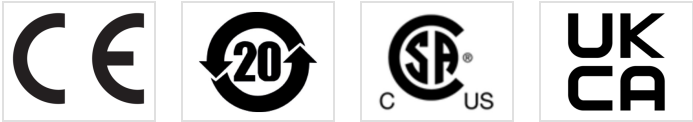

Header	
Material short text	MSUDK-LB1Z-616_2.5
Cable length	2.5 m
Side 1	
Family construction form	MSUD B
Mounting method	inserted, screwed
Thread	M3
Tightening torque	0.4 Nm
Material	PBT
Degree of protection (EN IEC 60529)	IP67
Commercial data	
URL Webshop	<a href="https://shop.murrelektronik.com/7000-10081-6160250">https://shop.murrelektronik.com/7000-10081-6160250</a>
GTIN	4048879222723
ECLASS-6.0	27279218
ECLASS-6.1	27279218
ECLASS-7.0	27279218
ECLASS-7.1	27279218
ECLASS-8.0	27279218
ECLASS-8.1	27279218
ECLASS-9.0	27060312
ECLASS-9.1	27060312
ECLASS-10.0.1	27060312
ECLASS-10.1	27060312
ECLASS-11.0	27060312
ECLASS-11.1	27060312
ECLASS-12.0	27060312
ECLASS-13.0	27060312
ECLASS-14.0	27060312
ETIM-5.0	EC001855
ETIM-6.0	EC001855
ETIM-7.0	EC001855
ETIM-8.0	EC001855
customs tariff number	85444290

EAN	4048879222723
-----	---------------

Packaging unit	1
----------------	---

#### Electrical data

Drop-out delay time max.	20 ms
--------------------------	-------

#### Electrical data | Supply

Operating voltage AC	24 V
----------------------	------

Operating voltage AC min.	19.2 V
---------------------------	--------

Operating voltage AC max.	28.8 V
---------------------------	--------

Operating voltage DC	24 V
----------------------	------

Operating voltage DC min.	18 V
---------------------------	------

Operating voltage DC max.	30 V
---------------------------	------

Current operating per contact max.	4 A
------------------------------------	-----

Cut-off peak voltage max.	55 V
---------------------------	------

#### Installation | Connection

Mounting set	M3
--------------	----

#### Device protection | Electrical

Additional condition protection degree	inserted, screwed
----------------------------------------	-------------------

Pollution Degree	3
------------------	---

Rated surge voltage	0.8 kV
---------------------	--------

#### Mechanical data | Material data

Material housing	Plastic
------------------	---------

Color housing	black
---------------	-------

Material screw connection	Steel
---------------------------	-------

Coating of fitting	galvanized
--------------------	------------

#### Mechanical data | Mounting data

Mounting method	inserted, screwed
-----------------	-------------------

#### Environmental characteristics | Climatic

Operating temperature min.	-25 °C
----------------------------	--------

Operating temperature max.	85 °C
----------------------------	-------

Additional condition temperature range	depending on cable quality
----------------------------------------	----------------------------

#### Important installation notes

Note on bending radius	<b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.
------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------

Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
-----------------------	-----------------------------------------------------------------------------------------------------

#### Installation | Cable

Cable identification	616
----------------------	-----

Cable Type	1
------------	---

Amount stranding	1
------------------	---

Stranding	3 wires stranded
-----------	------------------

Wire arrangement	black 1, black 2, green-yellow
------------------	--------------------------------

Cable weight	61.6 g/m
--------------	----------

Material wire insulation	PVC
--------------------------	-----

Amount wires	3
--------------	---

Outer diameter insulation	1.8 mm
---------------------------	--------

Outer diameter tolerance core insulation	± 0.1 mm
------------------------------------------	----------

Shore hardness wire insulation	43 ± 5 Shore D
--------------------------------	----------------

Material properties wire insulation	good machinability
-------------------------------------	--------------------

Ingredient freeness wire insulation	CFC-free, cadmium-free, silicone-free, lead-free
-------------------------------------	--------------------------------------------------

Printing color of wire insulation	white (isolation black)
-----------------------------------	-------------------------

Amount strands (wire)	24
-----------------------	----

Diameter of single wires	0.2 mm
--------------------------	--------

Conductor crosssection (wire)	0.75 mm <sup>2</sup>
Material conductor wire	Stranded copper wire, bare
Conductor type (wire)	Strand class 5
Outer-diameter (jacket)	5.9 mm
Tolerance outer diameter (sheath)	± 5 %
Material jacket	PVC
Shore hardness jacket	80 ± 5 Shore A
Freedom from ingredients (jacket)	CFC-free, cadmium-free, silicone-free, lead-free
Material property (jacket)	good machinability
Conductor resistance (wire)	26 Ω/km @ 20 °C
Max. rated voltage (conductor - ground)	300 V
Max. rated voltage (conductor - conductor)	500 V
Withstand voltage (wire - wire)	3 kV @ 60 s
Withstand voltage (wire - jacket)	3 kV @ 60 s
Current load capacity (standard)	to DIN VDE 0298-4
Current load capacity min. wire	12 A
Min. operating temperature (static)	-30 °C
Max. operating temperature (fixed)	70 °C
Operating temperature min. (dynamic)	-5 °C
Operating temperature max. (dynamic)	70 °C
Oil resistance	good
Chemical resistance	good
Other resistances	good resistance to gasoline
Bending radius (fixed)	5 × Outer diameter
Bending radius (dynamic)	10 × Outer diameter