

M12 Power male 0° / female 0° L-cod.



PUR 5x1.5 bk UL/CSA+drag ch. 1.5m

Art.No.: 7000-P4241-P040150  
Weight: 0.255  
Country of origin: DE  
Model designation: MSWBLL0-WAL-UP04\_1.5






Power  
M12 – M12, 5-pole  
Male straight – female straight  
L-coded  
with cable sleeves  
Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.  
Further cable lengths on request.

Link to Product

Illustration

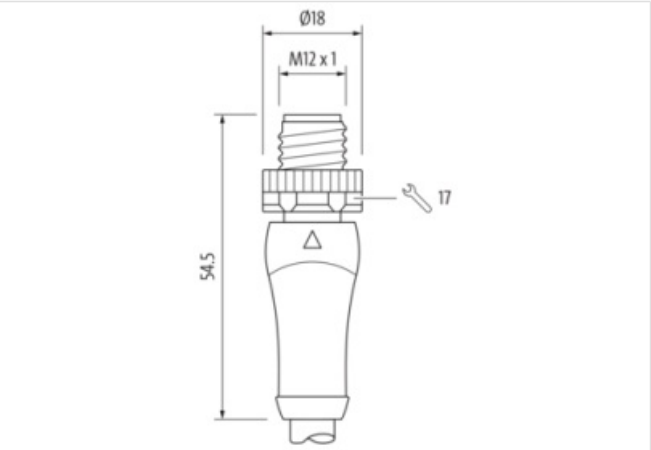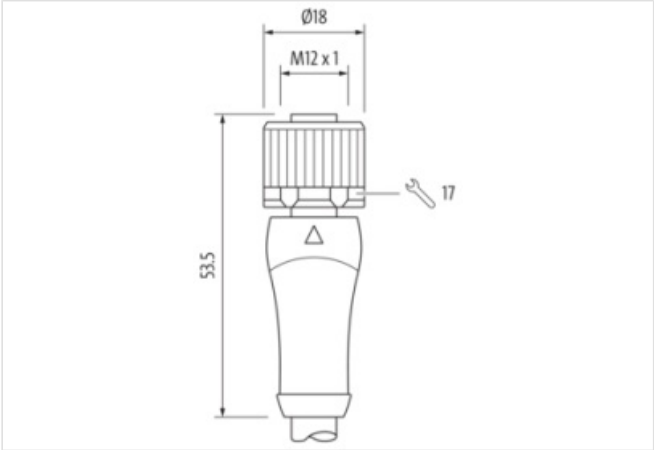

|    |      |    |
|----|------|----|
| 1  | BN 1 | 1  |
| 2  | WH 2 | 2  |
| 3  | BU 3 | 3  |
| 4  | BK 4 | 4  |
| FE | GY 5 | FE |

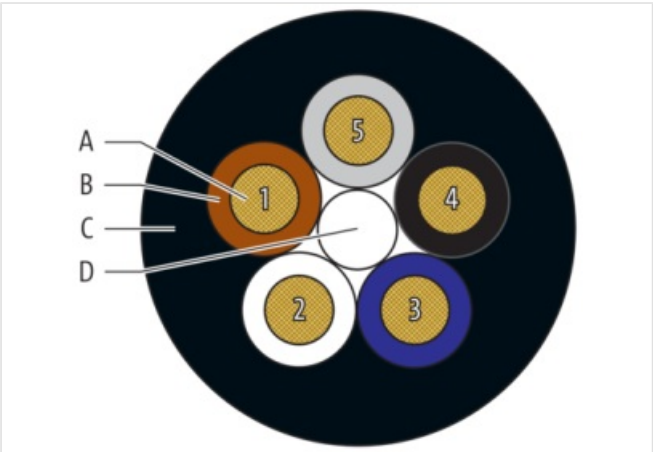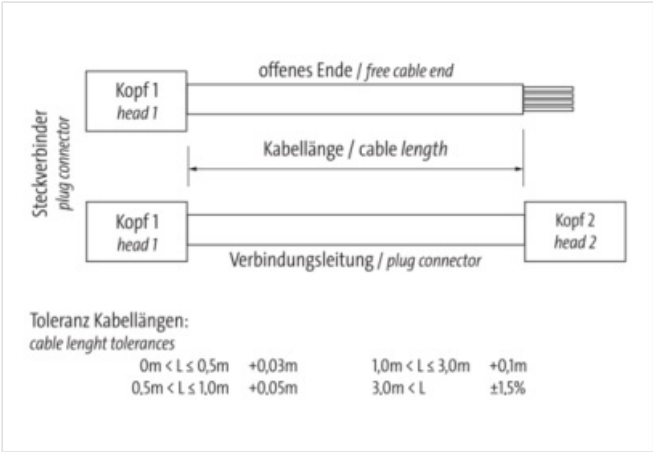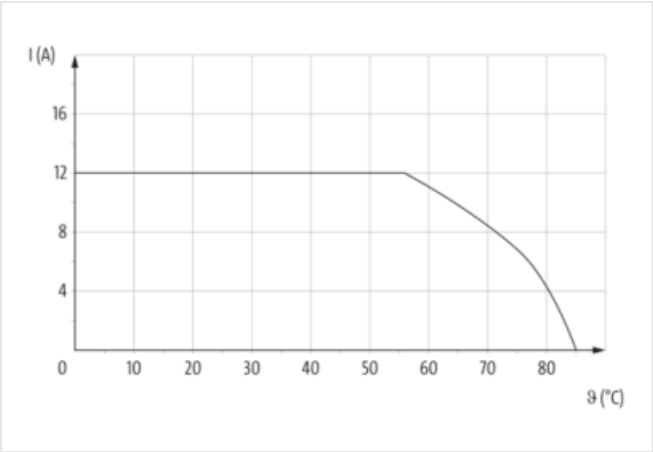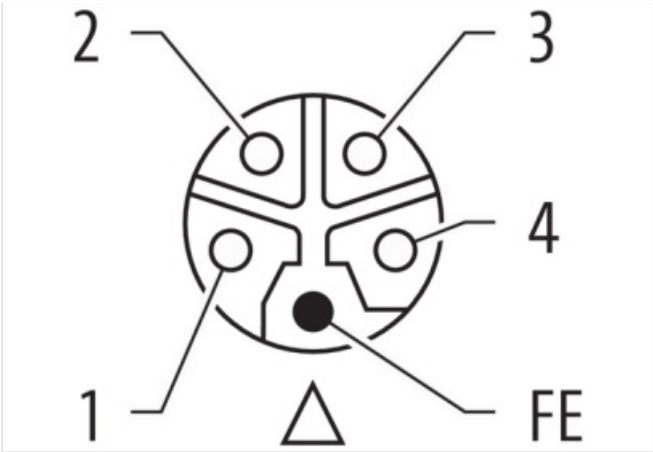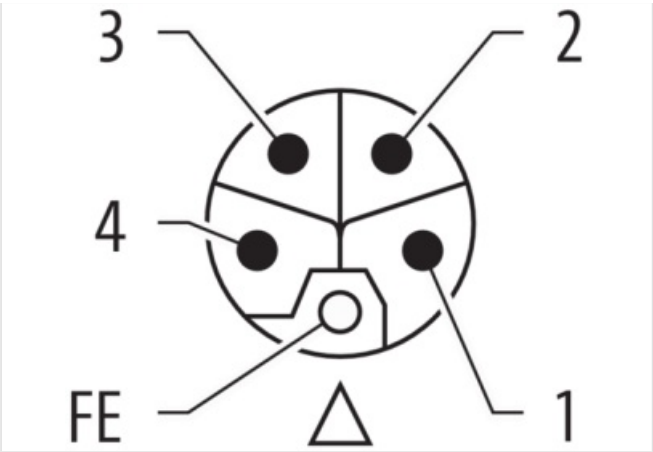

Product may differ from Image



Header

Material short text MSWBLL0-WAL-UP04\_1.5

Cable length 1,50 m

Side 1

|                                           |                          |
|-------------------------------------------|--------------------------|
| Family construction form                  | M12P                     |
| No. of poles                              | 5                        |
| Coding                                    | L                        |
| Gender                                    | male                     |
| Mounting method                           | inserted, screwed        |
| Thread                                    | M12 x 1                  |
| Tightening torque                         | 0.6 Nm                   |
| Width across flats                        | SW17                     |
| Cable outlet                              | straight                 |
| suitable for corrugated tube (internal Ø) | 12 mm                    |
| Material                                  | PUR                      |
| Material contact                          | Copper alloy             |
| Coating contact                           | gold plated              |
| Degree of protection (EN IEC 60529)       | IP65, IP66K, IP67, IP69K |

#### Side 2

|                                           |                          |
|-------------------------------------------|--------------------------|
| Family construction form                  | M12P                     |
| No. of poles                              | 5                        |
| Coding                                    | L                        |
| Gender                                    | female                   |
| Mounting method                           | inserted, screwed        |
| Thread                                    | M12 x 1                  |
| Tightening torque                         | 0.6 Nm                   |
| Width across flats                        | SW17                     |
| Cable outlet                              | straight                 |
| suitable for corrugated tube (internal Ø) | 12 mm                    |
| Material                                  | PUR                      |
| Material contact                          | Copper alloy             |
| Coating contact                           | gold plated              |
| Degree of protection (EN IEC 60529)       | IP65, IP66K, IP67, IP69K |

#### Commercial data

|                       |                                                                                                                     |
|-----------------------|---------------------------------------------------------------------------------------------------------------------|
| URL Webshop           | <a href="https://shop.murrelektronik.com/7000-P4241-P040150">https://shop.murrelektronik.com/7000-P4241-P040150</a> |
| GTIN                  | 4048879647687                                                                                                       |
| ECLASS-6.0            | 27279218                                                                                                            |
| ECLASS-6.1            | 27279218                                                                                                            |
| ECLASS-7.0            | 27279218                                                                                                            |
| ECLASS-7.1            | 27279218                                                                                                            |
| ECLASS-8.0            | 27279218                                                                                                            |
| ECLASS-8.1            | 27279218                                                                                                            |
| ECLASS-9.0            | 27060327                                                                                                            |
| ECLASS-9.1            | 27060311                                                                                                            |
| ECLASS-10.0.1         | 27060311                                                                                                            |
| ECLASS-10.1           | 27060311                                                                                                            |
| ECLASS-11.0           | 27060311                                                                                                            |
| ECLASS-11.1           | 27060311                                                                                                            |
| ECLASS-12.0           | 27060327                                                                                                            |
| ECLASS-13.0           | 27060311                                                                                                            |
| ECLASS-14.0           | 27060311                                                                                                            |
| ETIM-5.0              | EC001855                                                                                                            |
| ETIM-6.0              | EC001855                                                                                                            |
| ETIM-7.0              | EC001855                                                                                                            |
| ETIM-8.0              | EC001855                                                                                                            |
| customs tariff number | 85444290                                                                                                            |
| EAN                   | 4048879647687                                                                                                       |

Packaging unit 1

**Electrical data | Supply**

|                                    |      |
|------------------------------------|------|
| Operating voltage DC max.          | 63 V |
| Current operating per contact max. | 12 A |

**Installation | Connection**

|                    |      |
|--------------------|------|
| Width across flats | SW17 |
| Mating cycles min. | 100  |

**Device protection | Electrical**

|                                        |                          |
|----------------------------------------|--------------------------|
| Degree of protection (EN IEC 60529)    | IP65, IP66K, IP67, IP69K |
| Additional condition protection degree | inserted, screwed        |
| Pollution Degree                       | 3                        |
| Rated surge voltage                    | 1.5 kV                   |
| Material group (IEC 60664-1)           | I                        |

**Mechanical data | Material data**

|                           |               |
|---------------------------|---------------|
| Material housing          | PUR           |
| Material screw connection | Brass         |
| Coating of fitting        | nickel plated |
| Material gasket           | FKM           |

**Mechanical data | Mounting data**

|                 |                                       |
|-----------------|---------------------------------------|
| Mounting method | inserted, screwed, Shaking protection |
|-----------------|---------------------------------------|

**Environmental characteristics | Climatic**

|                                        |                            |
|----------------------------------------|----------------------------|
| Operating temperature min.             | -30 °C                     |
| Operating temperature max.             | 85 °C                      |
| Additional condition temperature range | depending on cable quality |

**Important installation notes**

|                        |                                                                                                                                                       |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note on bending radius | <b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |
| Note on strain relief  | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.                                                   |

**Conformity**

|                  |                    |
|------------------|--------------------|
| Product standard | EN IEC 61076-2-111 |
|------------------|--------------------|

**Installation | Cable**

|                                          |                                                                                                                           |
|------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|
| Cable identification                     | P04                                                                                                                       |
| Cable Type                               | 3                                                                                                                         |
| Function cable                           | Power                                                                                                                     |
| Amount stranding                         | 1                                                                                                                         |
| Stranding                                | 5 wires around core filler twisted                                                                                        |
| Filler                                   | yes                                                                                                                       |
| Cable weight                             | 118 g/m                                                                                                                   |
| Material wire insulation                 | PP                                                                                                                        |
| Amount wires                             | 5                                                                                                                         |
| Outer diameter insulation                | 2.3 mm                                                                                                                    |
| Outer diameter tolerance core insulation | ± 0.1 mm                                                                                                                  |
| Shore hardness wire insulation           | 60 ± 5 Shore D                                                                                                            |
| Ingredient freeness wire insulation      | lead-free, cadmium-free, CFC-free, halogen-free, silicone-free                                                            |
| Printing color of wire insulation        | white (isolation blue), white (isolation brown), white (isolation black), black (white isolation), white (gray isolation) |
| Amount strands (wire)                    | 84                                                                                                                        |
| Diameter of single wires                 | 0.15 mm                                                                                                                   |
| Conductor crosssection (wire)            | 1.5 mm <sup>2</sup>                                                                                                       |
| Material conductor wire                  | Stranded copper wire, bare                                                                                                |
| Conductor type (wire)                    | strand class 6                                                                                                            |
| Outer-diameter (jacket)                  | 8.2 mm                                                                                                                    |

|                                         |                                                                             |
|-----------------------------------------|-----------------------------------------------------------------------------|
| Tolerance outer diameter (sheath)       | ± 5 %                                                                       |
| Material jacket                         | PUR                                                                         |
| Shore hardness jacket                   | 90 ± 5 Shore A                                                              |
| Freedom from ingredients (jacket)       | lead-free, cadmium-free, CFC-free, halogen-free, silicone-free              |
| Material property (jacket)              | abrasion-resistant, low adhesion, good machinability, matte                 |
| Conductor resistance (wire)             | 13.3 Ω/km @ 20 °C                                                           |
| Nominal voltage AC max.                 | 1,000 V                                                                     |
| Withstand voltage (wire - wire)         | 10 kV @ 60 s                                                                |
| Withstand voltage (wire - jacket)       | 10 kV @ 60 s                                                                |
| Current load capacity (standard)        | to DIN VDE 0298-4                                                           |
| Current load capacity min. wire         | 13.5 A                                                                      |
| Min. operating temperature (static)     | -50 °C                                                                      |
| Max. operating temperature (static)     | 80 °C / 90 °C @ 10000 h Operation                                           |
| Operating temperature min. (dynamic)    | -25 °C                                                                      |
| Operating temperature max. (dynamic)    | 80 °C / 90 °C @ 10000 h Operation                                           |
| Operating temperature min. (drag chain) | -25 °C                                                                      |
| Operating temperature max. (drag chain) | 80 °C / 90 °C @ 10000 h Operation                                           |
| Flame resistance                        | UL 1581 § 1080, CSA FT2, IEC 60332-1-2, IEC 60332-2-2                       |
| Oil resistance                          | IEC 60811-404                                                               |
| Chemical resistance                     | good                                                                        |
| Other resistances                       | resistant to hydrolysis, resistant to microbes, good resistance to gasoline |
| Bending radius (fixed)                  | 5 × Outer diameter                                                          |
| Bending radius (dynamic)                | 10 × Outer diameter                                                         |
| No. of bending cycles (C-track)         | 5 Mio. @ 25 °C                                                              |
| Traversing distance (C-track)           | 5 m @ 25 °C                                                                 |
| Travel speed (C-track)                  | 3.3 m/s @ 25 °C                                                             |
| Acceleration (C-track)                  | 5 m/s² @ 25 °C                                                              |
| No. of torsion cycles                   | 5 Mio.                                                                      |
| Torsion stress                          | ± 180 °/m @ 180 °C                                                          |
| Torsion speed                           | 35 cycles/min                                                               |