Low Value 3W Chip Resistors

LRF3W Series





Features:

- 3W in 1225 package
- Resistance range from 3 to $100m\Omega$
- Tolerances to ±1%
- AEC-Q200 qualified
- Low thermal impedance
- Wide terminations to enhance robustness


All Pb-free parts comply with EU Directive 2011/65/EU amended by (EU) 2015/863 (RoHS3)

Electrical Data

		LRF3W	
Power rating at 70°C	W	3	
Resistance range	Ω	R003 to R10	
Resistance tolerance	%	<r004: 1,="" 2,="" 5,="" 5<="" td="" ≥r004:=""></r004:>	
TCR	ppm/°C	<r004: td="" ±100<="" ±550,="" ≥r004:=""></r004:>	
Dielectric withstand	V	200	
Standard values		E24 and integer multiples of R001 up to R01, of R005 up to R05 and of R01 preferred	
Ambient temperature range	°C	-55 to +150	
Pad / trace area $^{ m 1}$	mm ²	500	

Note 1: Recommended minimum pad & adjacent trace area for each termination for rated dissipation on FR4 PCB

Physical Data

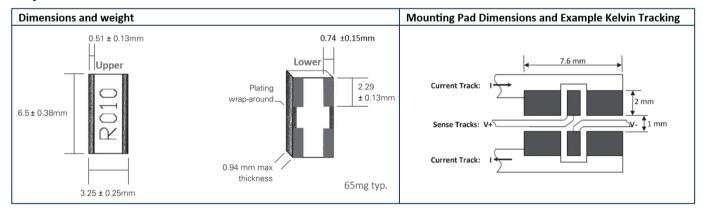

Construction

Proprietary non-noble copper-based thick-film material and organic protection are screen printed on a 96% alumina substrate. The components are laser trimmed to achieve the required resistance tolerance.

The wrap-around terminations have an electroplated nickel barrier and matte tin or tin-lead finish. This ensures excellent leach resistance properties and solderability. Chips can withstand immersion in solder at 250°C for 90 seconds and are suitable for reflow or wave solder mounting processes.

Marking

The body protection and marking are resistant to all normal industrial cleaning solvents suitable for printed circuits. Chips are packed and mounted with marking side up.

Processing

LRF3W chips are placed on the termination pads with the actual resistor element mounted face down. For reflow of LRF3W parts, a solder paste thickness of not less than $100\mu m$ is recommended.

Low Value 3W Chip Resistors







Performance Data

AEC-Q200 Table 7 Reference	Test	Method	Maximum (add R05)	Typical (@R20)
3	High temperature exposure	MIL-STD-202 Method 108 ±ΔR9	0.5	0.2
4	Temperature cycling	JESD22 Method JA-104 ±ΔR9	0.25	0.1
6	Moisture resistance	Moisture resistance MIL-STD-202 Method 106 ±ΔR%		0.2
7	Biased humidity	MIL-STD-202 Method 103 ±ΔR9	0.5	0.2
8	Operational life (cyclic load)	MIL-STD-202 Method 108 ±ΔR9	1	0.5
14	Vibration	MIL-STD-202 Method 204 ±ΔR9	0.5	0.05
15	Resistance to solder heat	MIL-STD-202 Method 210 ±ΔR9	0.25	0.05
16	Thermal shock	MIL-STD-202 Method 107 ±ΔR9	0.25	0.1
18	Solderability	J-STD-002	>95% coverage	
21	Board flex	AEC-Q200-005 ±ΔR9	0.5	0.2
22	Terminal strength	AEC-Q200-006 ±ΔR9	0.25	0.1
Short term overload		6.25 x Pr for 2s ±ΔR9	0.5	
	Low temperature storage	-65°C for 100 hours ±ΔR9	0.5	-
	Shelf-life test	Room temp. for 12 months ±ΔR9	0.1	
	Leach resistance	Solder dip at 250°C	90s minimum	


Note: Full AEC-Q200 qualification applies to ohmic values ≥R02

Thermal Data

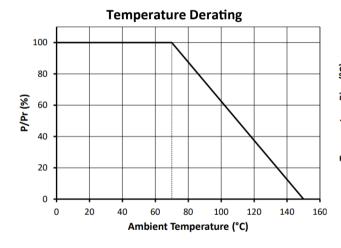

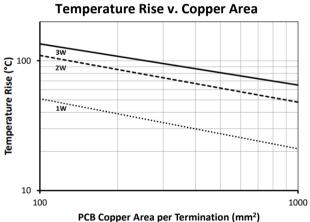

Pulse Data

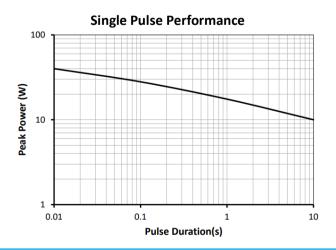


Low Value 3W Chip Resistors





Value Measurement

LRF3W resistors are measured using 4-terminal probes on the lower side of the chip, centred on the chip and at the spacings shown below.




Packaging

LRF3W resistors are supplied taped and reeled as per IEC 286-3. The standard quantity per reel is 1800 parts. For full details of tape and reel dimensions see:

https://www.ttelectronics.com/TTElectronics/media/ProductFiles/Application-Note/PS003-Packing-of-Specialist-Chip-Resistors.pdf

Ordering Procedure

Global Part Number Example: LRF3W-R02FW (20mΩ ±1%, Pb-free)



1	2	3	4				
Type	Value	Tolerance	Termination & Packing				
LRF3W	E24 =3-5	F = ±1%	W	Pb-free	1800/reel	Standard packing	
	characters	G = ±2%	PB	SnPb finish	1000/1661	Standard packing	
		J = ±5%	T1	Pb-free	1000/2001	Non standard poolsing	
	R = ohms		T1PB	SnPb finish	1000/1661	Non-standard packing	

Legacy Part Numbers

This product has a legacy part number format. This is still available for ordering, but for new designs use of the Global Part Number is recommended.

Legacy Part Number Example: LRC-LRF3WLF-01-R020-F (20mΩ ±1%, Pb-free)



1	2	3	4	5	6
Family	Model	Termination	TCR	Value	Tolerance
LRC	LRF3W	Omit for SnPb LF = Pb-free	01 = ±100ppm/°C	E24 4 characters R = ohms	F = ±1% G = ±2% J = ±5%