

DATASHEET

Curta

SR4L096 • lamiiANT[®]



Features

- Antenna for 4G and 3G applications
- Placement on short edge of PCB.
- LTE, GSM, CDMA, DCS, PCS, WCDMA, UMTS, HSPDA, GPRS, EDGE, IMT
- Bands: 698-960MHz; 1710-2170MHz; 2300-2400MHz; 2500-2700MHz
- SMD mounted device supplied on Tape and Reel
- Automotive temperature rating
- Compact 40 x 10 x 1.7mm
- Ideal for MIMO system

Contents

1.	Description	2
2.	Applications	2
3.	General data	2
4.	Part number	3
5.	RF characteristics	3
6.	RF performance	4
6.1.	Return loss	4
6.2.	VSWR	4
6.3.	Efficiency	5
6.4.	Antenna pattern	6
7.	Antenna dimensions	11
8.	Schematic symbol and pin definition	12
9.	Host PCB footprint	12
10.	Electrical interface	13
10.1.	Transmission line	13
10.2.	Matching circuit	13
11.	Antenna integration guide	14
11.1.	Antenna placement	14
11.2.	Host PCB layout	15
11.3.	Host PCB clearance	16
12.	Reference board	18
12.1.	Reference board matching circuit	18
13.	Soldering	19
14.	Hazardous material regulation conformance	19
15.	Packaging	19
15.1.	Optimal storage conditions	19
15.2.	Tape characteristics	20
15.3.	Reel dimensions	21
15.4.	Box dimensions	21
15.5.	Bag properties	22
15.6.	Reel label information	22

1. Description

Curta is intended for use with 4G/3G applications. This antenna is placed on the short edge of the host PCB and is designed for coexistence requirements, it can be integrated as a single antenna or in a MIMO system. This product specification gives the antenna performance over all stated frequency ranges.

2. Applications


- OBD2 vehicle tracking systems
- 4G Routers
- Medical equipment
- Tablets and Industrial systems
- MIMO Systems
- Femtocell / Picocell networks
- IoT sensor networks

3. General data

FREQUENCY	698-960MHz 1710-2170MHz 2300-2400MHz 2500-2700MHz
POLARIZATION	Linear
OPERATING TEMPERATURE	-40°C to 140°C
ENVIRONMENTAL CONDITION TEST	ISO16750-4 5.1.1.1/5.1.2.1/5.3.2
IMPEDANCE WITH MATCHING	50 Ω
WEIGHT	<1.5g
ANTENNA TYPE	SMD
DIMENSIONS	40.0 x 10.0 x 1.7 (mm)

4. Part number

CURTA
SR4L096

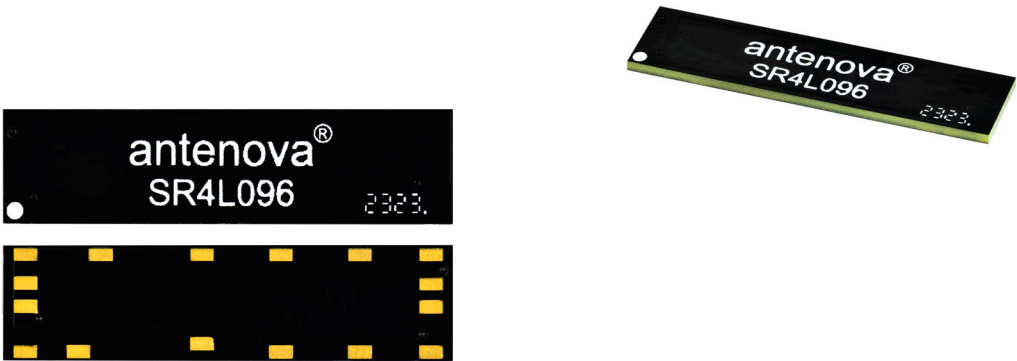


5. RF characteristics

FREQUENCY	698-960MHZ	1710-2170MHZ	2300-2400MHZ	2500-2700MHZ
PEAK GAIN	2.1dBi	3.8dBi	3.8dBi	2.7dBi
AVERAGE GAIN (LINEAR)	-2.5dB	-1.7dB	-2.8dB	-2.7dB
AVERAGE EFFICIENCY	56%	66%	52%	53%
MAXIMUM RETURN LOSS	-5.1dB	-5.2dB	-9.7dB	-4.9dB
MAXIMUM VSWR	3.5:1	3.3:1	1.9:1	3.5:1

All data measured on Antenova's evaluation PCB Part
No. SR4L096-EVB-1


6. RF performance

6.1. Return loss

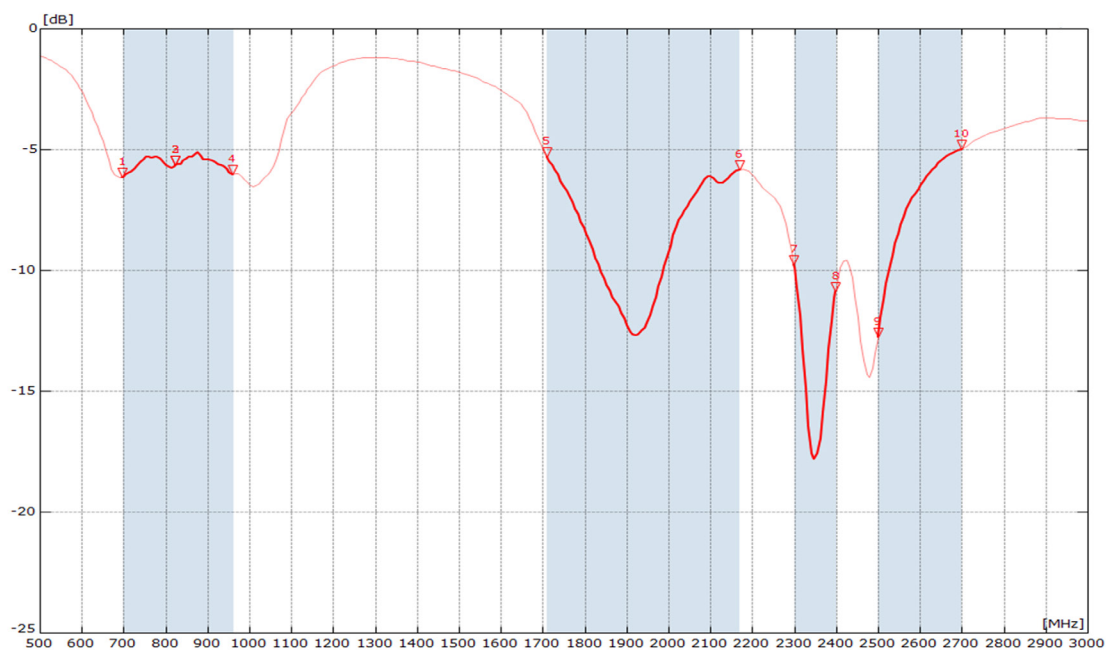


All data measured on Antenova's evaluation PCB Part
No. SR4L096-EVB-1

6.2. VSWR

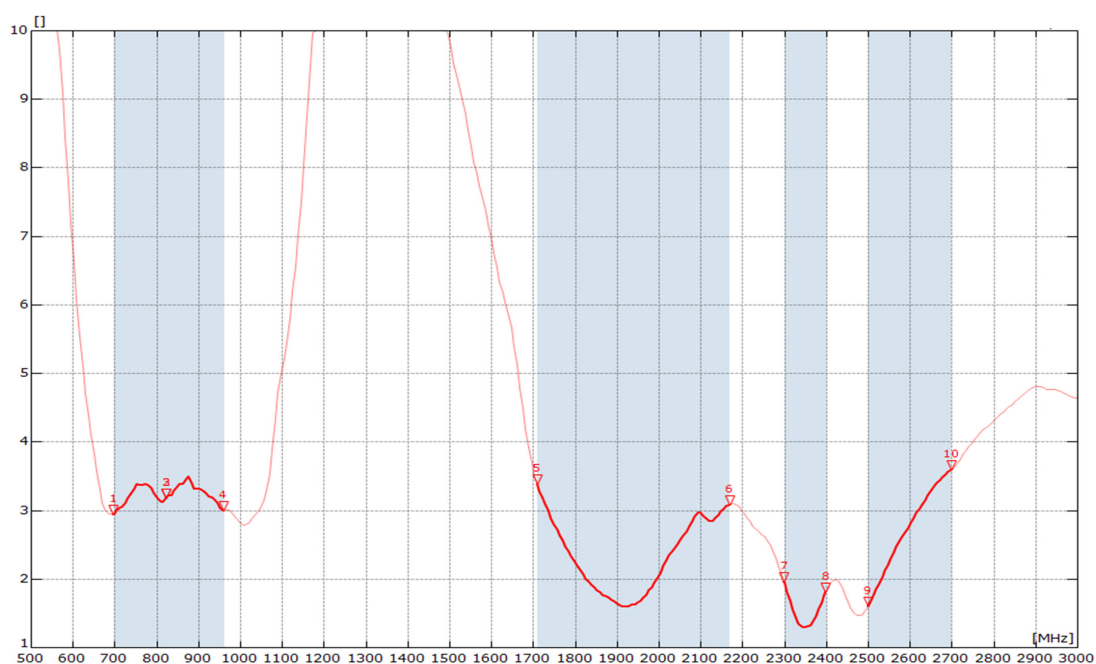

All data measured on Antenova's evaluation PCB Part
No. SR4L096-EVB-1

6.3. Efficiency


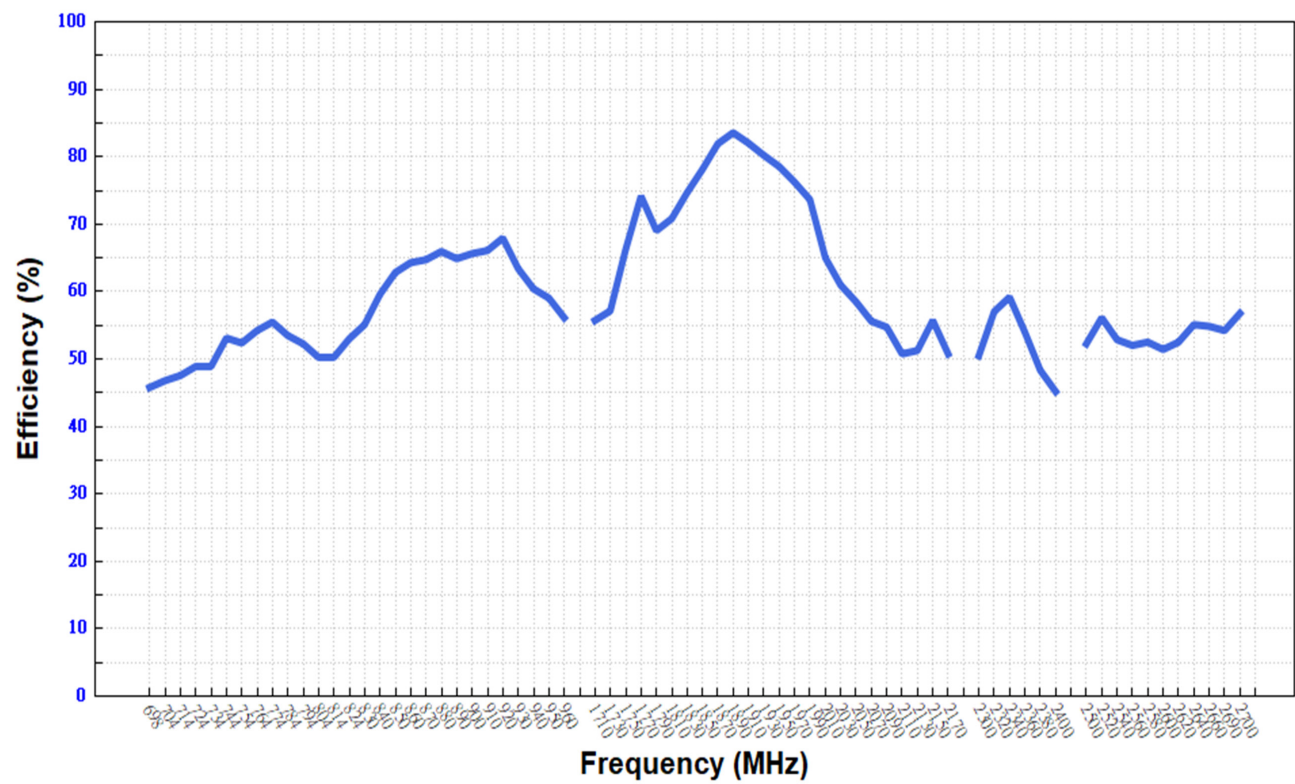


All data measured on Antenna's evaluation PCB Part
No. SR4L096-EVB-1


6.4. Antenna pattern

6.4.1. 764MHZ

3D pattern at 764MHz

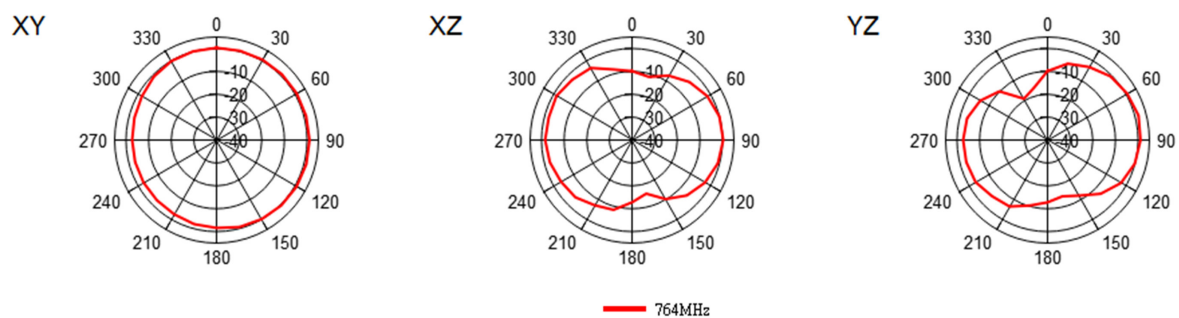
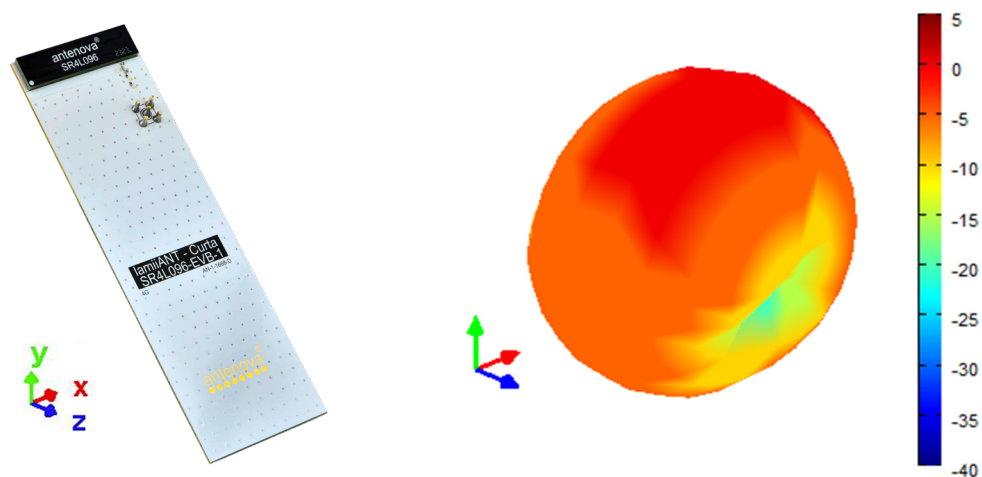


6.4.2. 900MHZ

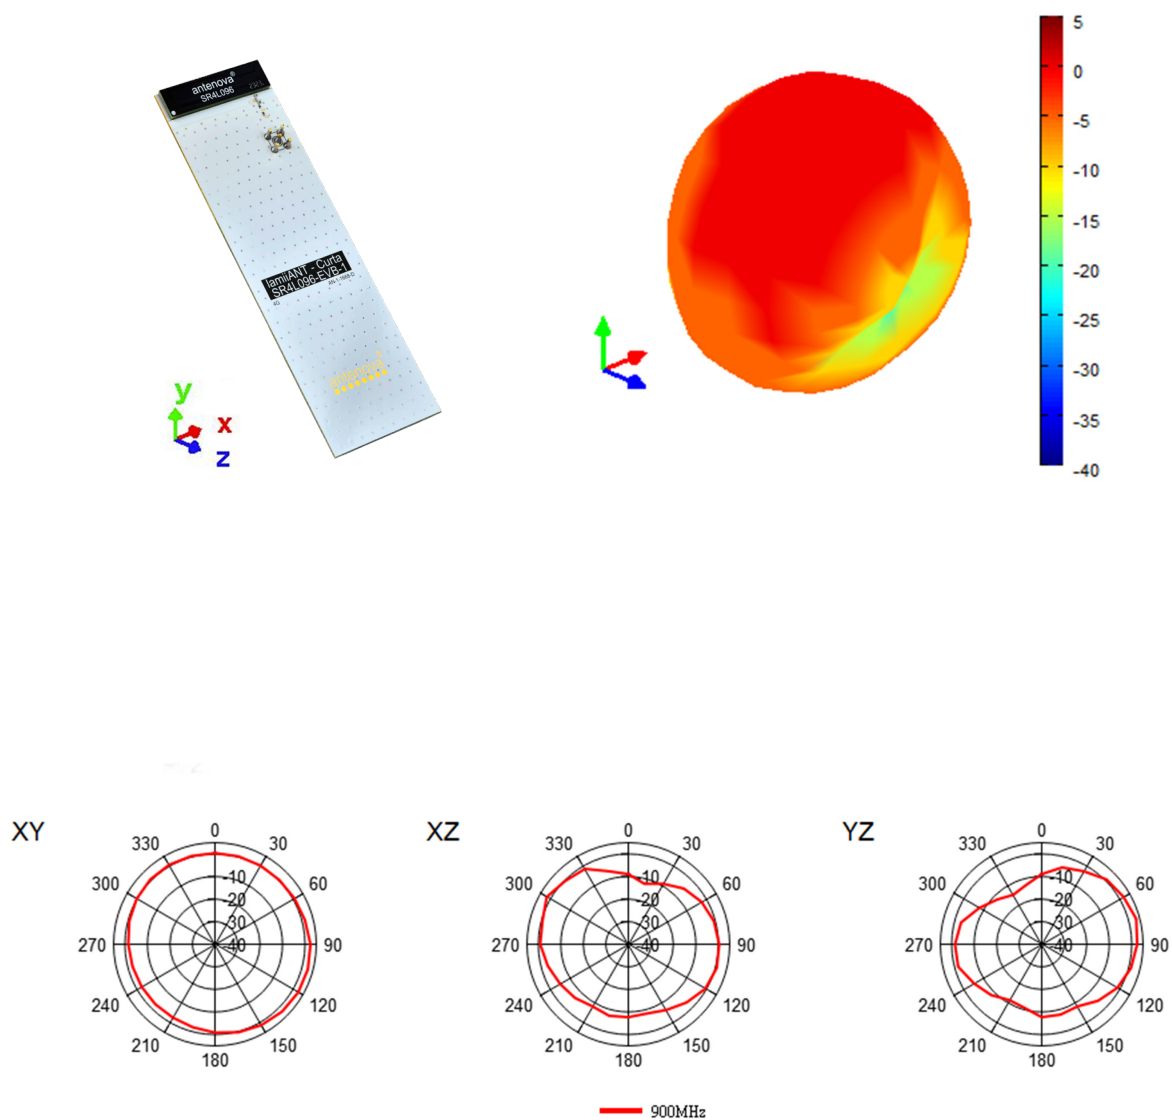3D pattern at 900MHz


6.4.3. 1930MHZ

3D pattern at 1930MHz

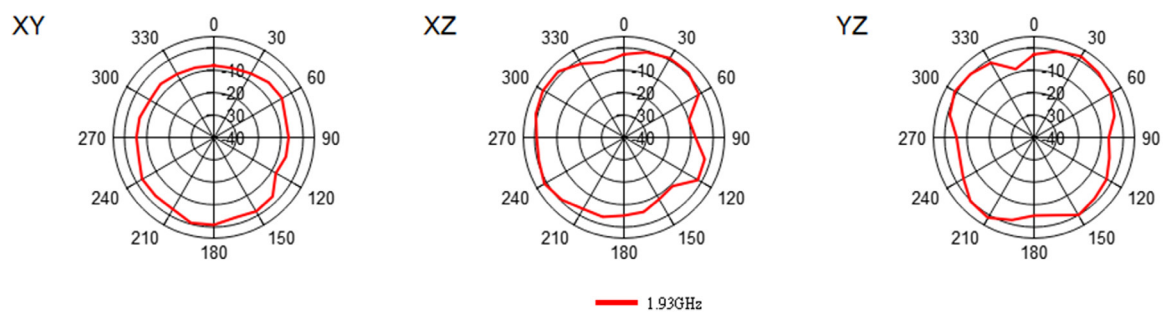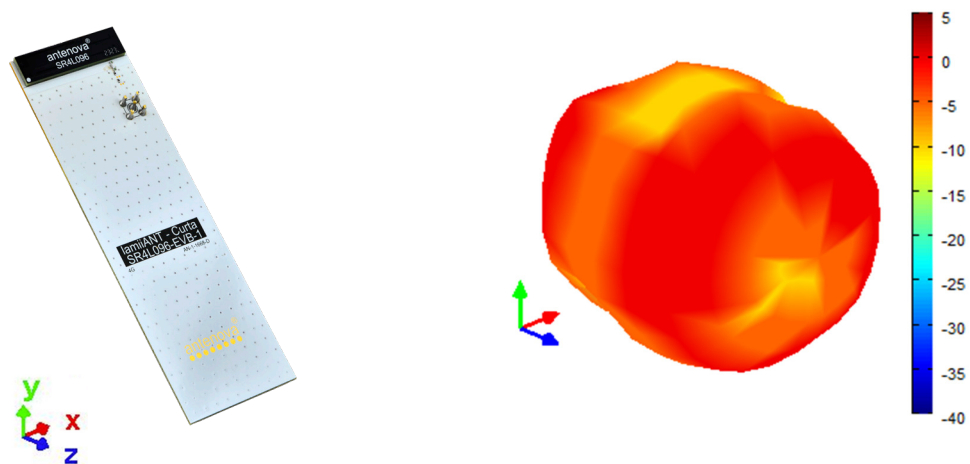


6.4.4. 2340MHZ


3D pattern at 2340MHz

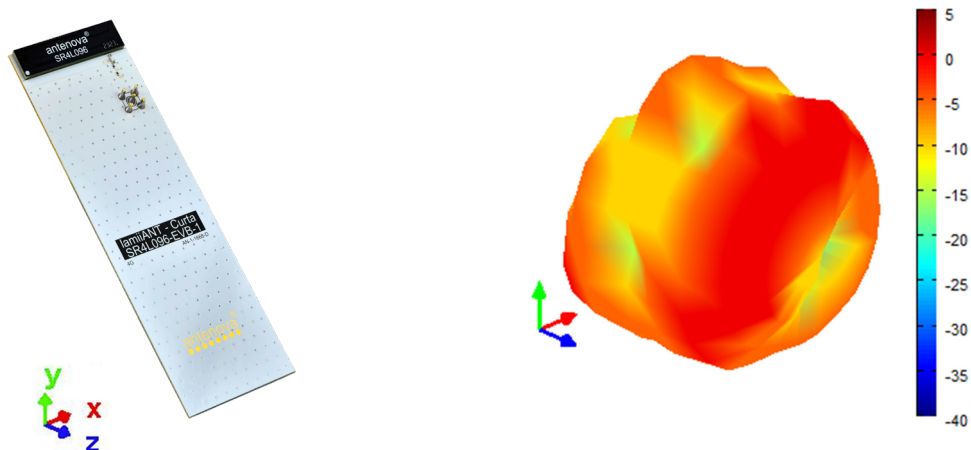


XY



XZ




YZ




— 2.34GHz

6.4.5. 2600MHZ


3D pattern at 2600MHz

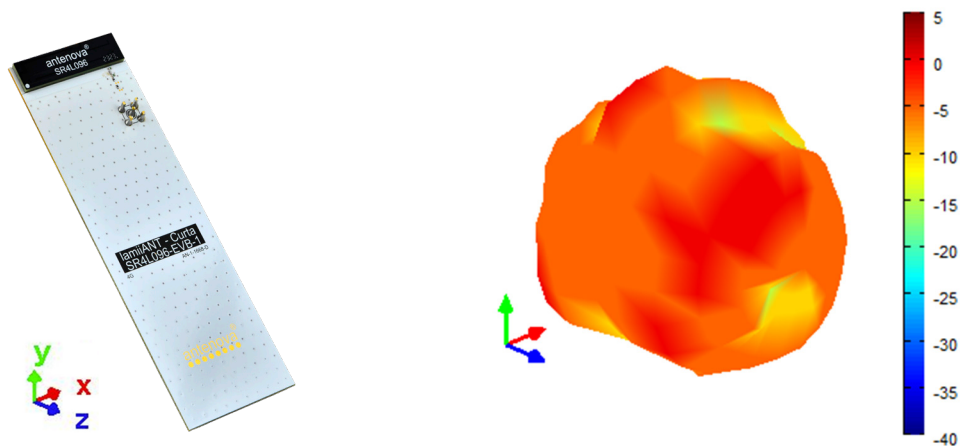


XY



XZ



YZ




— 2.6GHz

7. Antenna dimensions

7.1. Dimensions Assembled


Top view

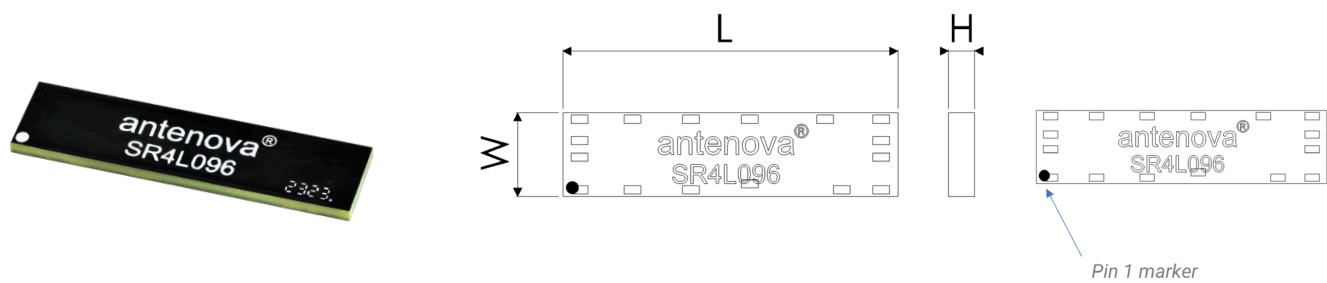

L	W	H
Length	Width	Height
40.0 ±0.1	10.0 ±0.1	1.7 ±0.1

All dimensions in (mm)

Bottom view

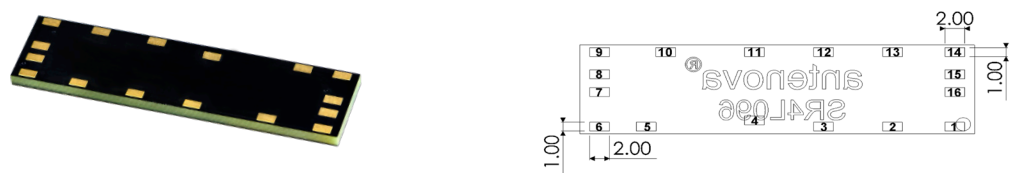


1-16copper pads: 1.0 x 2.0 (mm)

8. Schematic symbol and pin definition


The circuit symbol for the antenna is shown below. The antenna has 10 pins with only 2 as functional. All other pins are for mechanical strength.

PIN	DESCRIPTION
5	Feed
Others	Not used (Mechanical only)

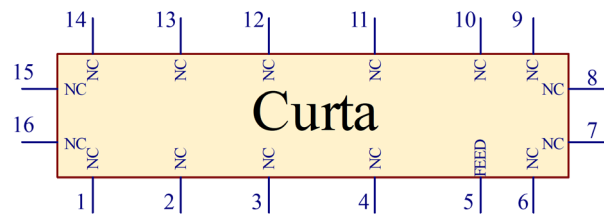

9. Host PCB footprint

The recommended host PCB footprint is below.

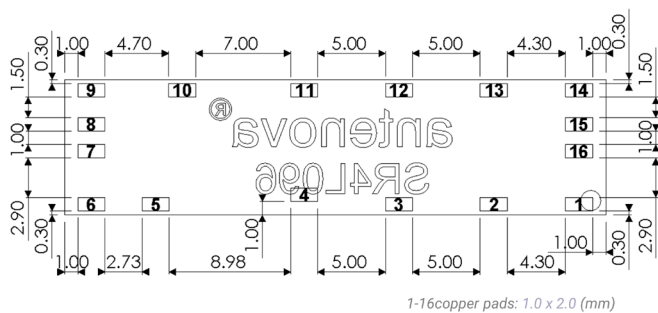

10. Electrical interface

10.1. Transmission line

All transmission lines should be designed to have a characteristic impedance of 50Ω.

- The length of each transmission line should be kept to a minimum
- All other parts of the RF system like transceivers, power amplifiers, etc, should also be designed to have a 50 Ω impedance


A co-planar transmission line can be designed using an online transmission line calculator tool, such as:

<https://blog.antenova.com/rf-transmission-line-calculator>

The PCB thickness, copper thickness and substrate dielectric constant are entered, then the tool calculates the transmission line width and gaps on either side of the track to give a 50 Ω impedance.

10.2. Matching circuit

The antenna requires a matching circuit that must be optimized for each product. The matching circuit will require up to seven components and the following circuit should be designed into the host PCB. Not all components may be required but should be included as a precaution. The matching network should be placed close to the antenna feed to ensure it is optionally effective in tuning the antenna.

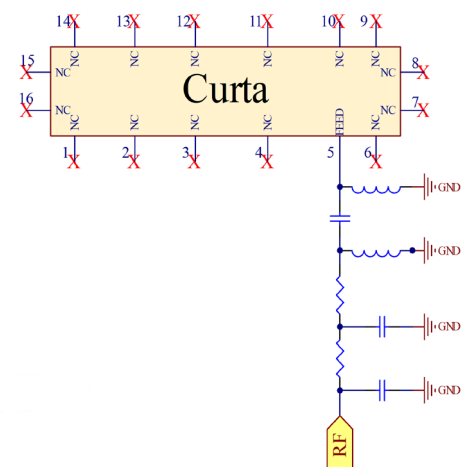


11. Antenna integration guide

We recommend the following during the design phase to maximise antenna performance and minimize noise:

- Minimum 4 layer PCB
- Route signals and power internally where possible
- Flood all layers with ground
- Knit ground on all layers together with plenty of vias

Follow placement guidance carefully, in addition Antenova provide technical support to help you through all stages of your design. Register for an account on <https://ask.antenova.com/> to access technical support.

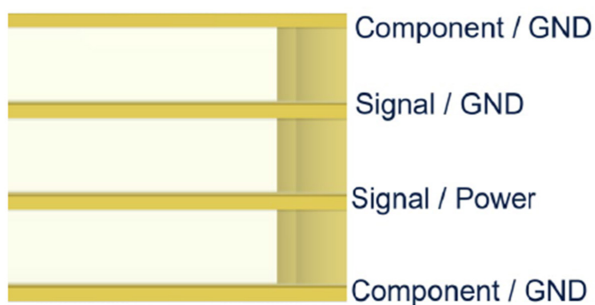


11.1. Antenna placement


The antenna requires clearance ideally in 5 spatial directions in antenna area as shown below.

The Antenova placement tool can be used to advise on antenna placement, see:

<https://blog.antenova.com/intelligent-antenna-selection-and-placement-tool-antenova>

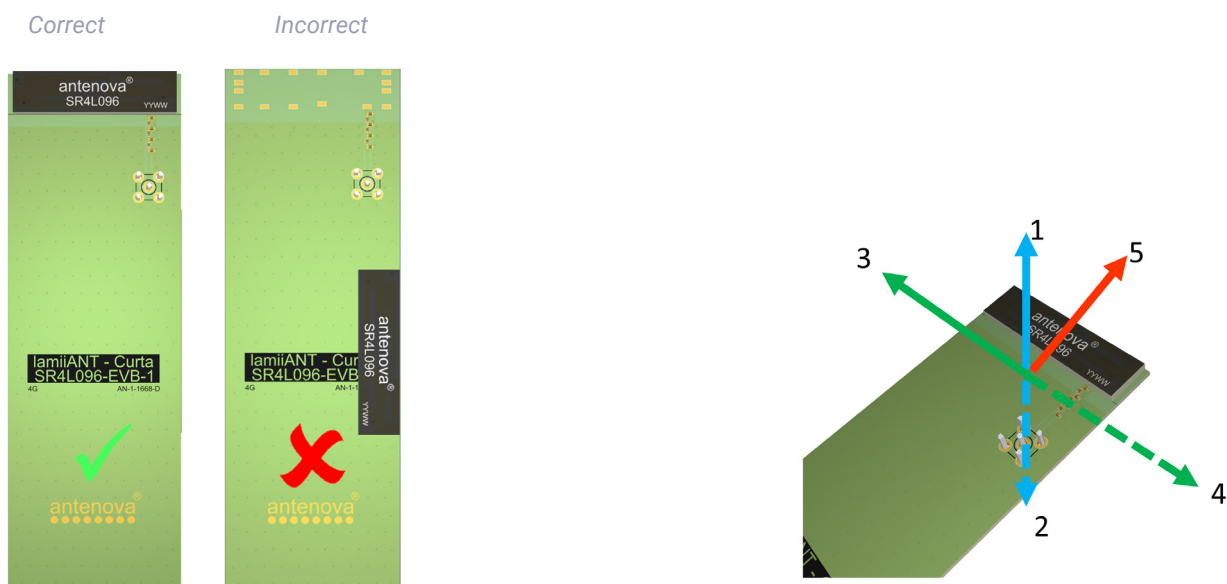


11.1. Antenna placement

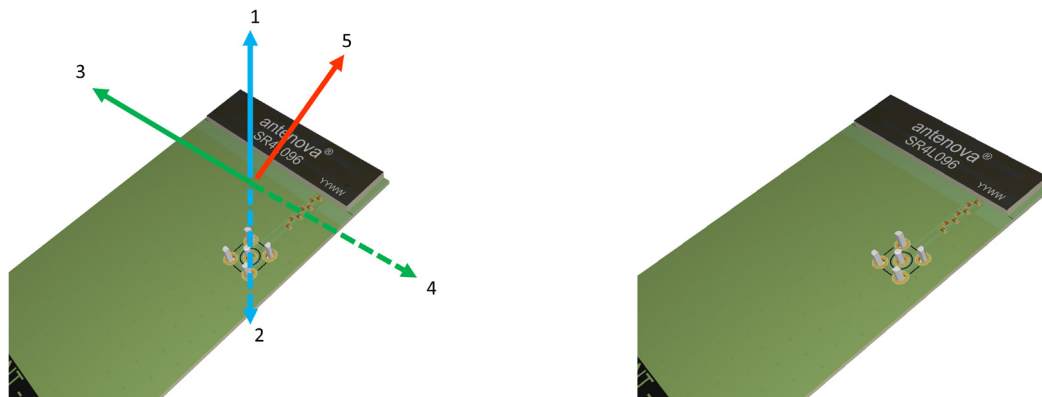

11.2. Host PCB layout

The host PCB must be designed using the PCB footprint shown with the correct clearances. An example of the PCB layout shows the antenna footprint. Please note this clearance area is critical to the performance of the antenna and must be applied through all layers of the PCB.



$D=3.3mm$
(pads distance to GND area)
All dimensions in (mm)

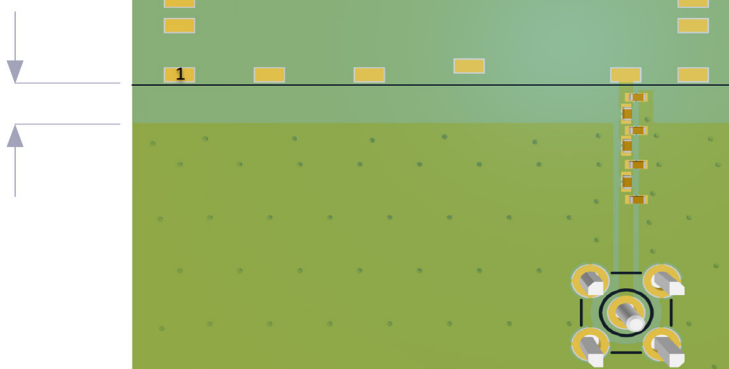

All dimensions in (mm)


11.3. Host PCB clearance

The host PCB must be designed using the PCB footprint shown with the correct clearances. An example of the PCB layout shows the antenna footprint. Please note this clearance area is critical to the performance of the antenna and must be applied through all layers of the PCB.

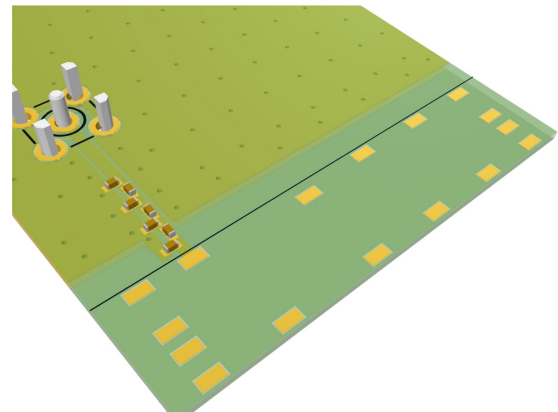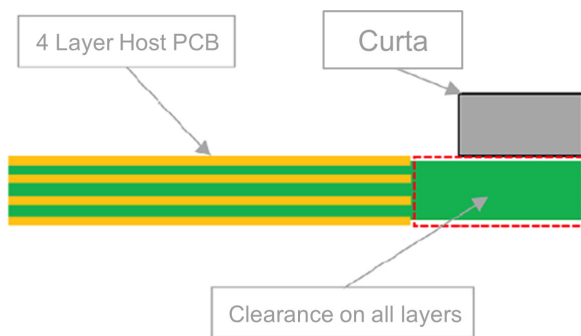

Below shows the antenna footprint and clearance through all layers on the PCB. Only the antenna pads and connections to feed and GND are present within this clearance area.

The best position for the antenna is in the full clearance area PCB. However, this antenna also can be placed at right side with at least 15mm gap from the top of PCB GND.

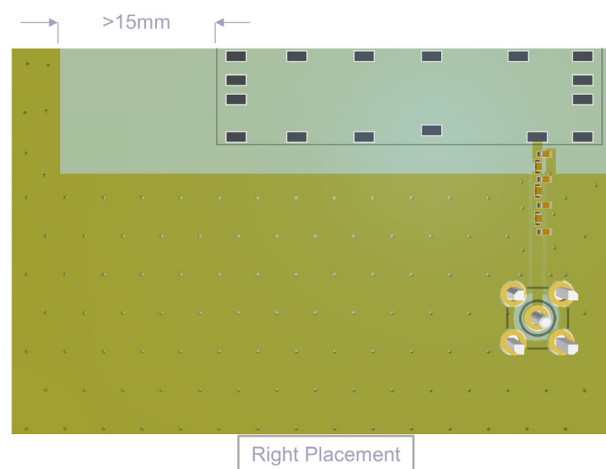



SR4L096-PS-1.01

12. Reference board


A reference board is used for evaluating the antenna R4L096 and it includes a SMA female connector. (part number SR4L096-EVB-1)

To order a reference board please see [antenova.com](https://www.antenova.com)



12.1. Reference board matching circuit

DESIGNATOR	TYPE	VALUE	DESCRIPTION
L1	Inductor	6.8nH	Murata LQG15HS series
L2	Inductor	12nH	Murata LQG15HS series
C1	Capacitor	3.0pF	Murata GJM15 series
C2, C3	Not Fitted		
R1	Resistor	0 ohm	Non-specific (0402)
R2	Resistor	0 ohm	Non-specific (0402)

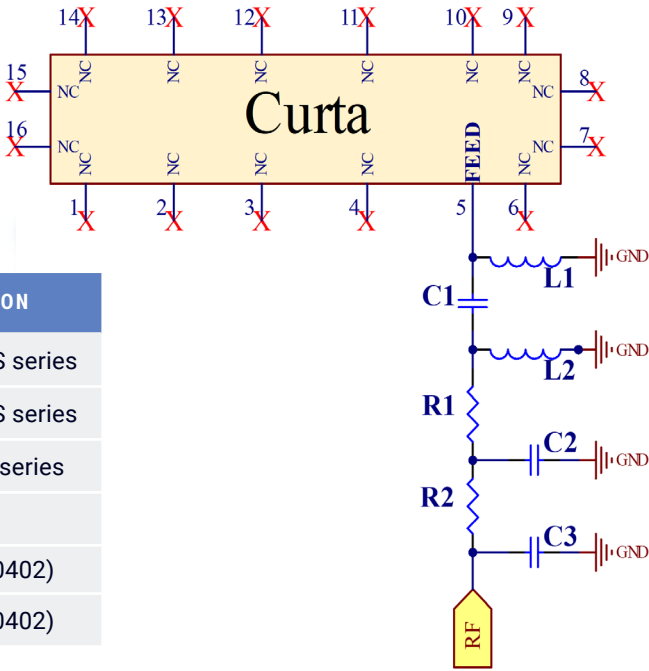

13. Soldering

This antenna is suitable for lead free soldering. The reflow profile should be adjusted to suit the device, oven and solder paste, while observing the following conditions:

- For leaded soldering, the maximum temperature should not exceed 240 °C.
- For lead free soldering, a maximum temperature of 255 °C for no more than 20 seconds is permitted.
- The antenna should not be exposed to temperatures exceeding 120 °C more than 3 times during the soldering process.

14. Hazardous material regulation conformance

The antenna has been tested to conform to RoHS and REACH requirements. A certificate of conformance is available from Antenova's website.

15. Packaging


15.1. Optimal storage conditions

TEMPERATURE	-10°C to 40°C
HUMIDITY	Less than 75% RH
SHELF LIFE	24 Months
STORAGE PLACE	Away from corrosive gas and direct sunlight
PACKAGING	Reels should be stored in unopened sealed manufacturer's plastic packaging.
MSL LEVEL	1

Note: Storage of open reels of antennas is not recommended due to possible oxidization of pads on antennas. If short term storage is necessary, then it is highly recommended that the bag containing the antenna reel is re-sealed and stored in conditions as described in the tabel above.

The shelf life of the antenna is 2 years provided the factory seal on the package has not been broken.

15.2. Tape characteristics

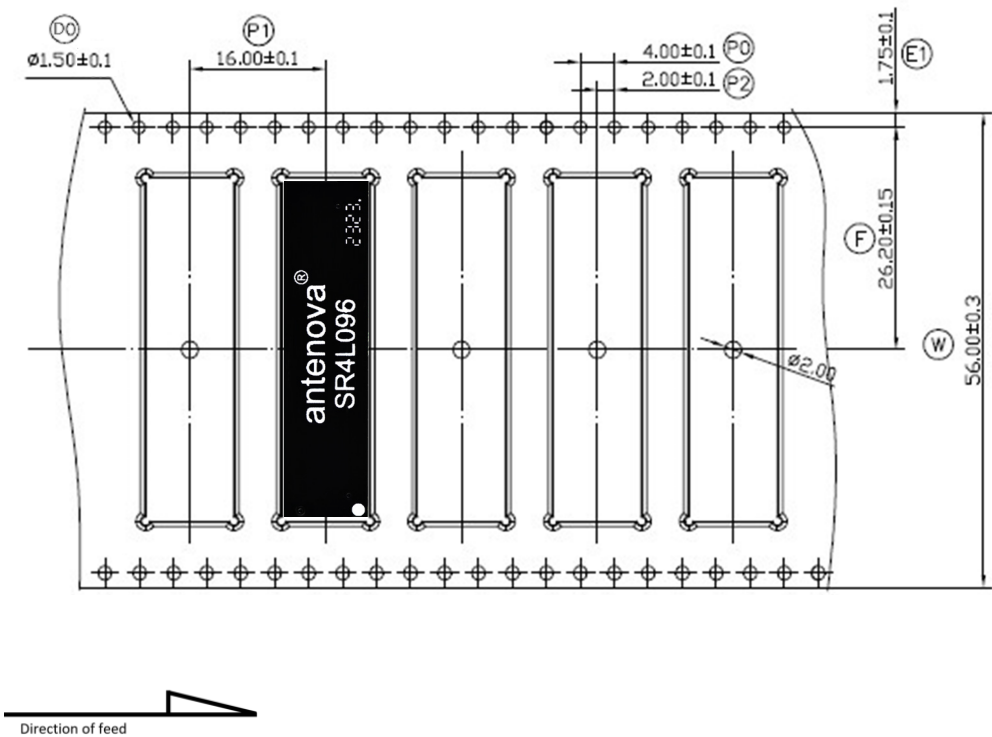


P0	P1	P2	D0
4.00 ± 0.1	16.00 ± 0.1	2.00 ± 0.1	1.50 ± 0.1

E	F	W
1.75 ± 0.1	26.20 ± 0.15	56.00 ± 0.3

All dimensions in (mm)

QUANTITY	LEADING SPACE	TRAILING SPACE
1000 pcs / reel	25 blank antenna holders	25 blank antenna holders


15.3. Reel dimensions

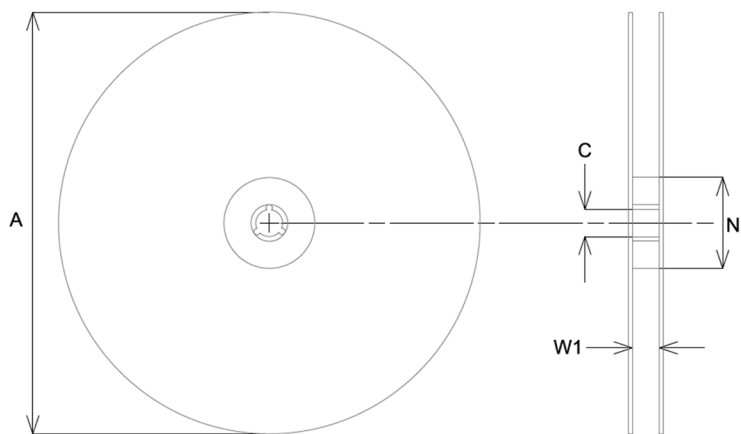

A	C	N	W1
330.0 ± 2.0	13.0 ± 0.5	178.0 ± 0.5	56 ± 2.0

All dimensions in (mm)

15.4. Box dimensions

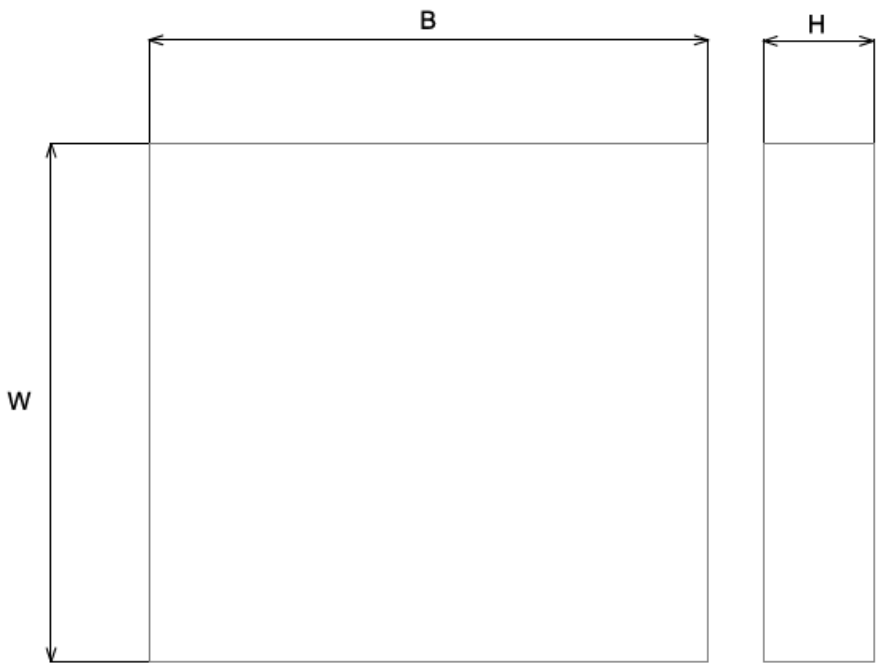

WIDTH (W)	BREADTH (B)	HEIGHT (H)
350mm	355mm	70mm

15.5. Bag properties

Reels are supplied in protective plastic packaging.

15.6. Reel label information



Quality statements

Antenova's products conform to REACH and RoHS legislation. For our statements regarding these and other quality standards, please see antenova.com.



Antenova reserves all rights to the contents of this document. Antenova gives no warranties based solely on the accuracy or completeness of the contents of this document and reserves the right to make changes to the specifications of the products described herein at any time and without notice.

Datasheet version
1.01 release JUL 1 2023

Antenna design, integration and test resources

Product designers – the details contained in this datasheet will help you to complete your embedded antenna design. Please follow our technical advice carefully to obtain optimum antenna performance.

We aim to support our customers to create high performance wireless products. You will find a wealth of design resources, calculators and case studies to aid your design on our website.

Antenova's design laboratories are equipped with the latest antenna design tools and test chambers. We provide antenna design, test and technical integration services to help you complete your design and obtain the required certifications.

If you cannot find the antenna you require in our product range, please contact us to discuss creating a custom antenna to meet your exact requirements.

Share knowledge with RF experts around the world.

ask.antenova is a global forum for designers and engineers working with wireless technology.

VISIT ASK.ANTENOVA

Visit antenova.com

Order antenna samples and evaluation boards, and read our antenna resources

VISIT ANTENOVA.COM

Request a volume quotation for antennas:

sales@antenova.com

Global headquarters

Antenova Ltd, 2nd Floor Titan Court, 3 Bishop Square, Hatfield, AL10 9NA

+44 (0) 1707 927589