

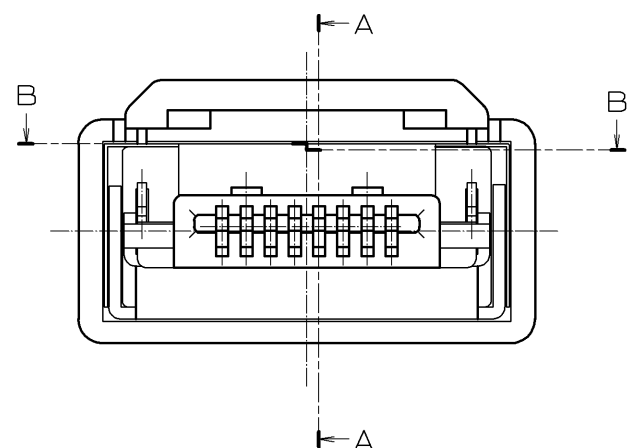



Oct.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

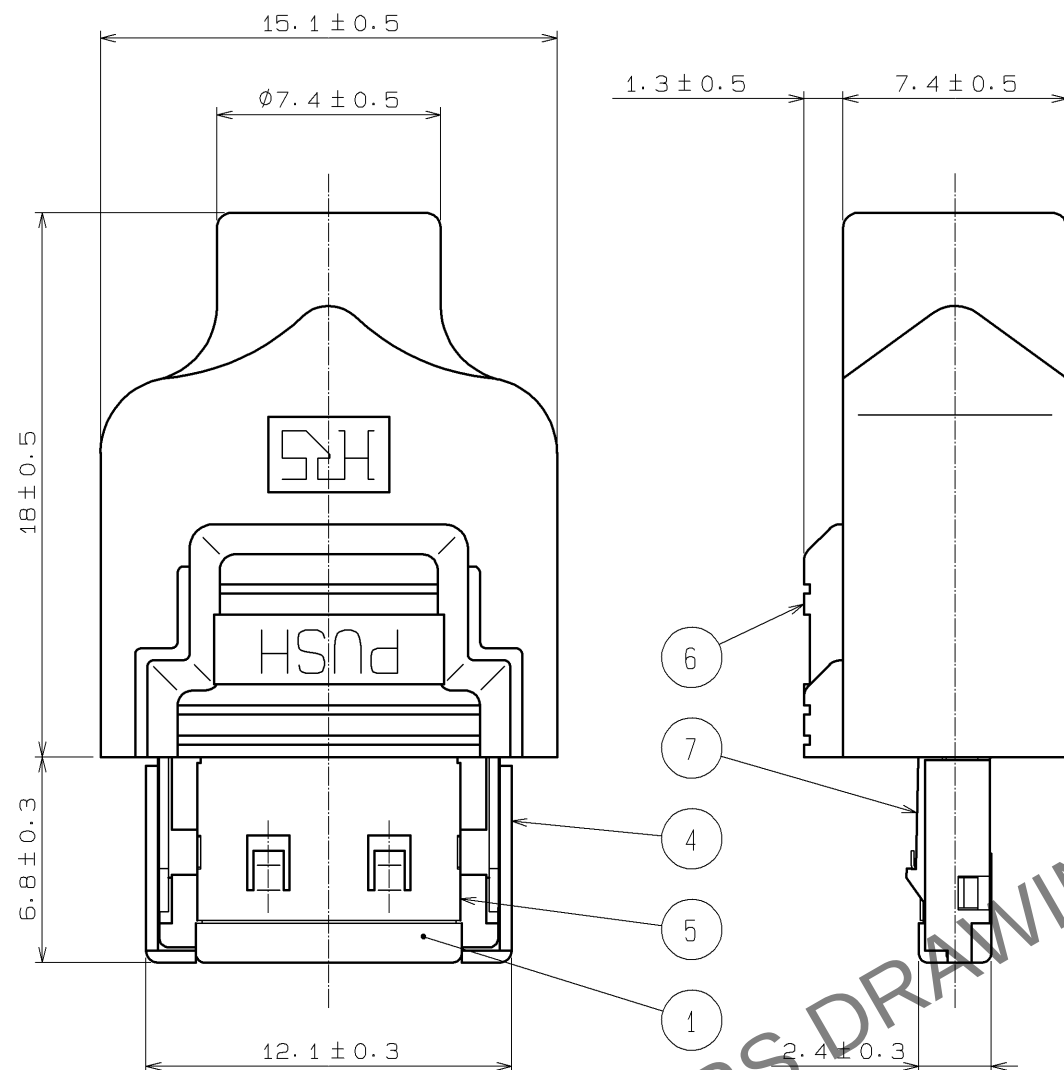


NOTE 1. THE REFERENCE NO. ④, ⑤ AND ⑥ SHALL BE ATTACHED.

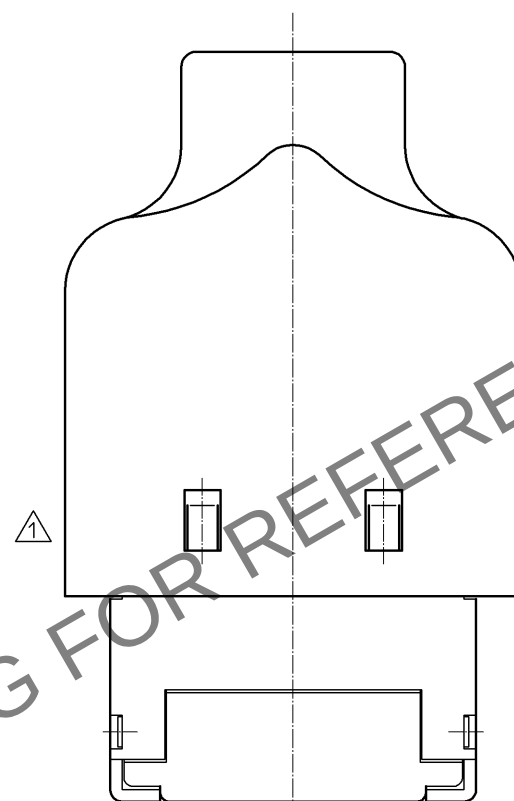

POLARIZATION
- MARK
(POLARIZATION MARK
SHALL BE PROCESSED
BY CHAMFERING.)

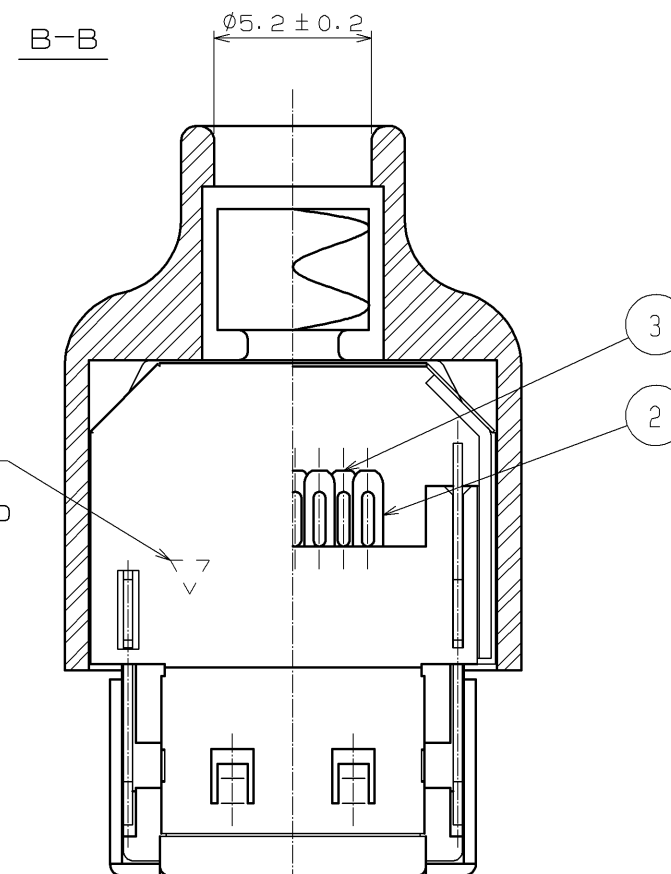

A-A
CABLE ASSEMBLY DRAWING

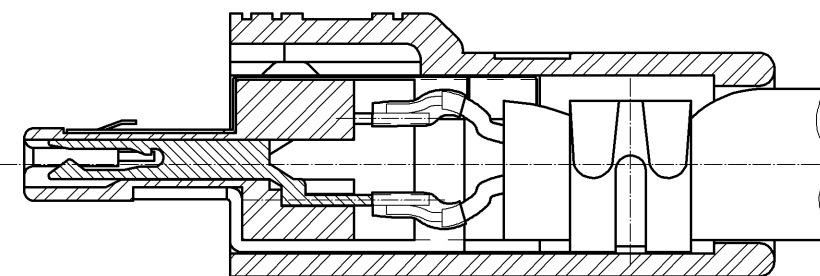

3	COPPER ALLOY	CONTACT AREA: GOLD PLATING 0.2μm min.	7	STAINLESS STEEL	
2	COPPER ALLOY	LEAD AREA: GOLD PLATING 0.03μm min. $\triangle$	6	POLYCARBONATE	BLACK, UL94HB
1	PPS	UNDER PLATING: NICKEL PLATING 2μm min.	5	PHOSPHOR BRONZE	NICKEL PLATING 1μm min. $\triangle$
		BLACK, UL94V-0	4	BRASS	NICKEL PLATING 1μm min. $\triangle$
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
UNITS mm		SCALE 4 : 1	COUNT 4	DESCRIPTION OF REVISIONS DIS-E-003308	DESIGNED TS. ITO
HIROSE ELECTRIC CO., LTD.		APPROVED : A0. SUZUKI	06. 05. 22	DRAWING NO.	EDC3-045931-03
		CHECKED : NF. MIYAZAKI	06. 05. 22	PART NO.	3240-8P-C(50)
		DESIGNED : HS. KIKUCHI	06. 05. 22	CODE NO.	CL232-0001-4-50
		DRAWN : HS. KIKUCHI	06. 05. 22		$\triangle$ 1/1
		DATE	10. 06. 14		