







Nov.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

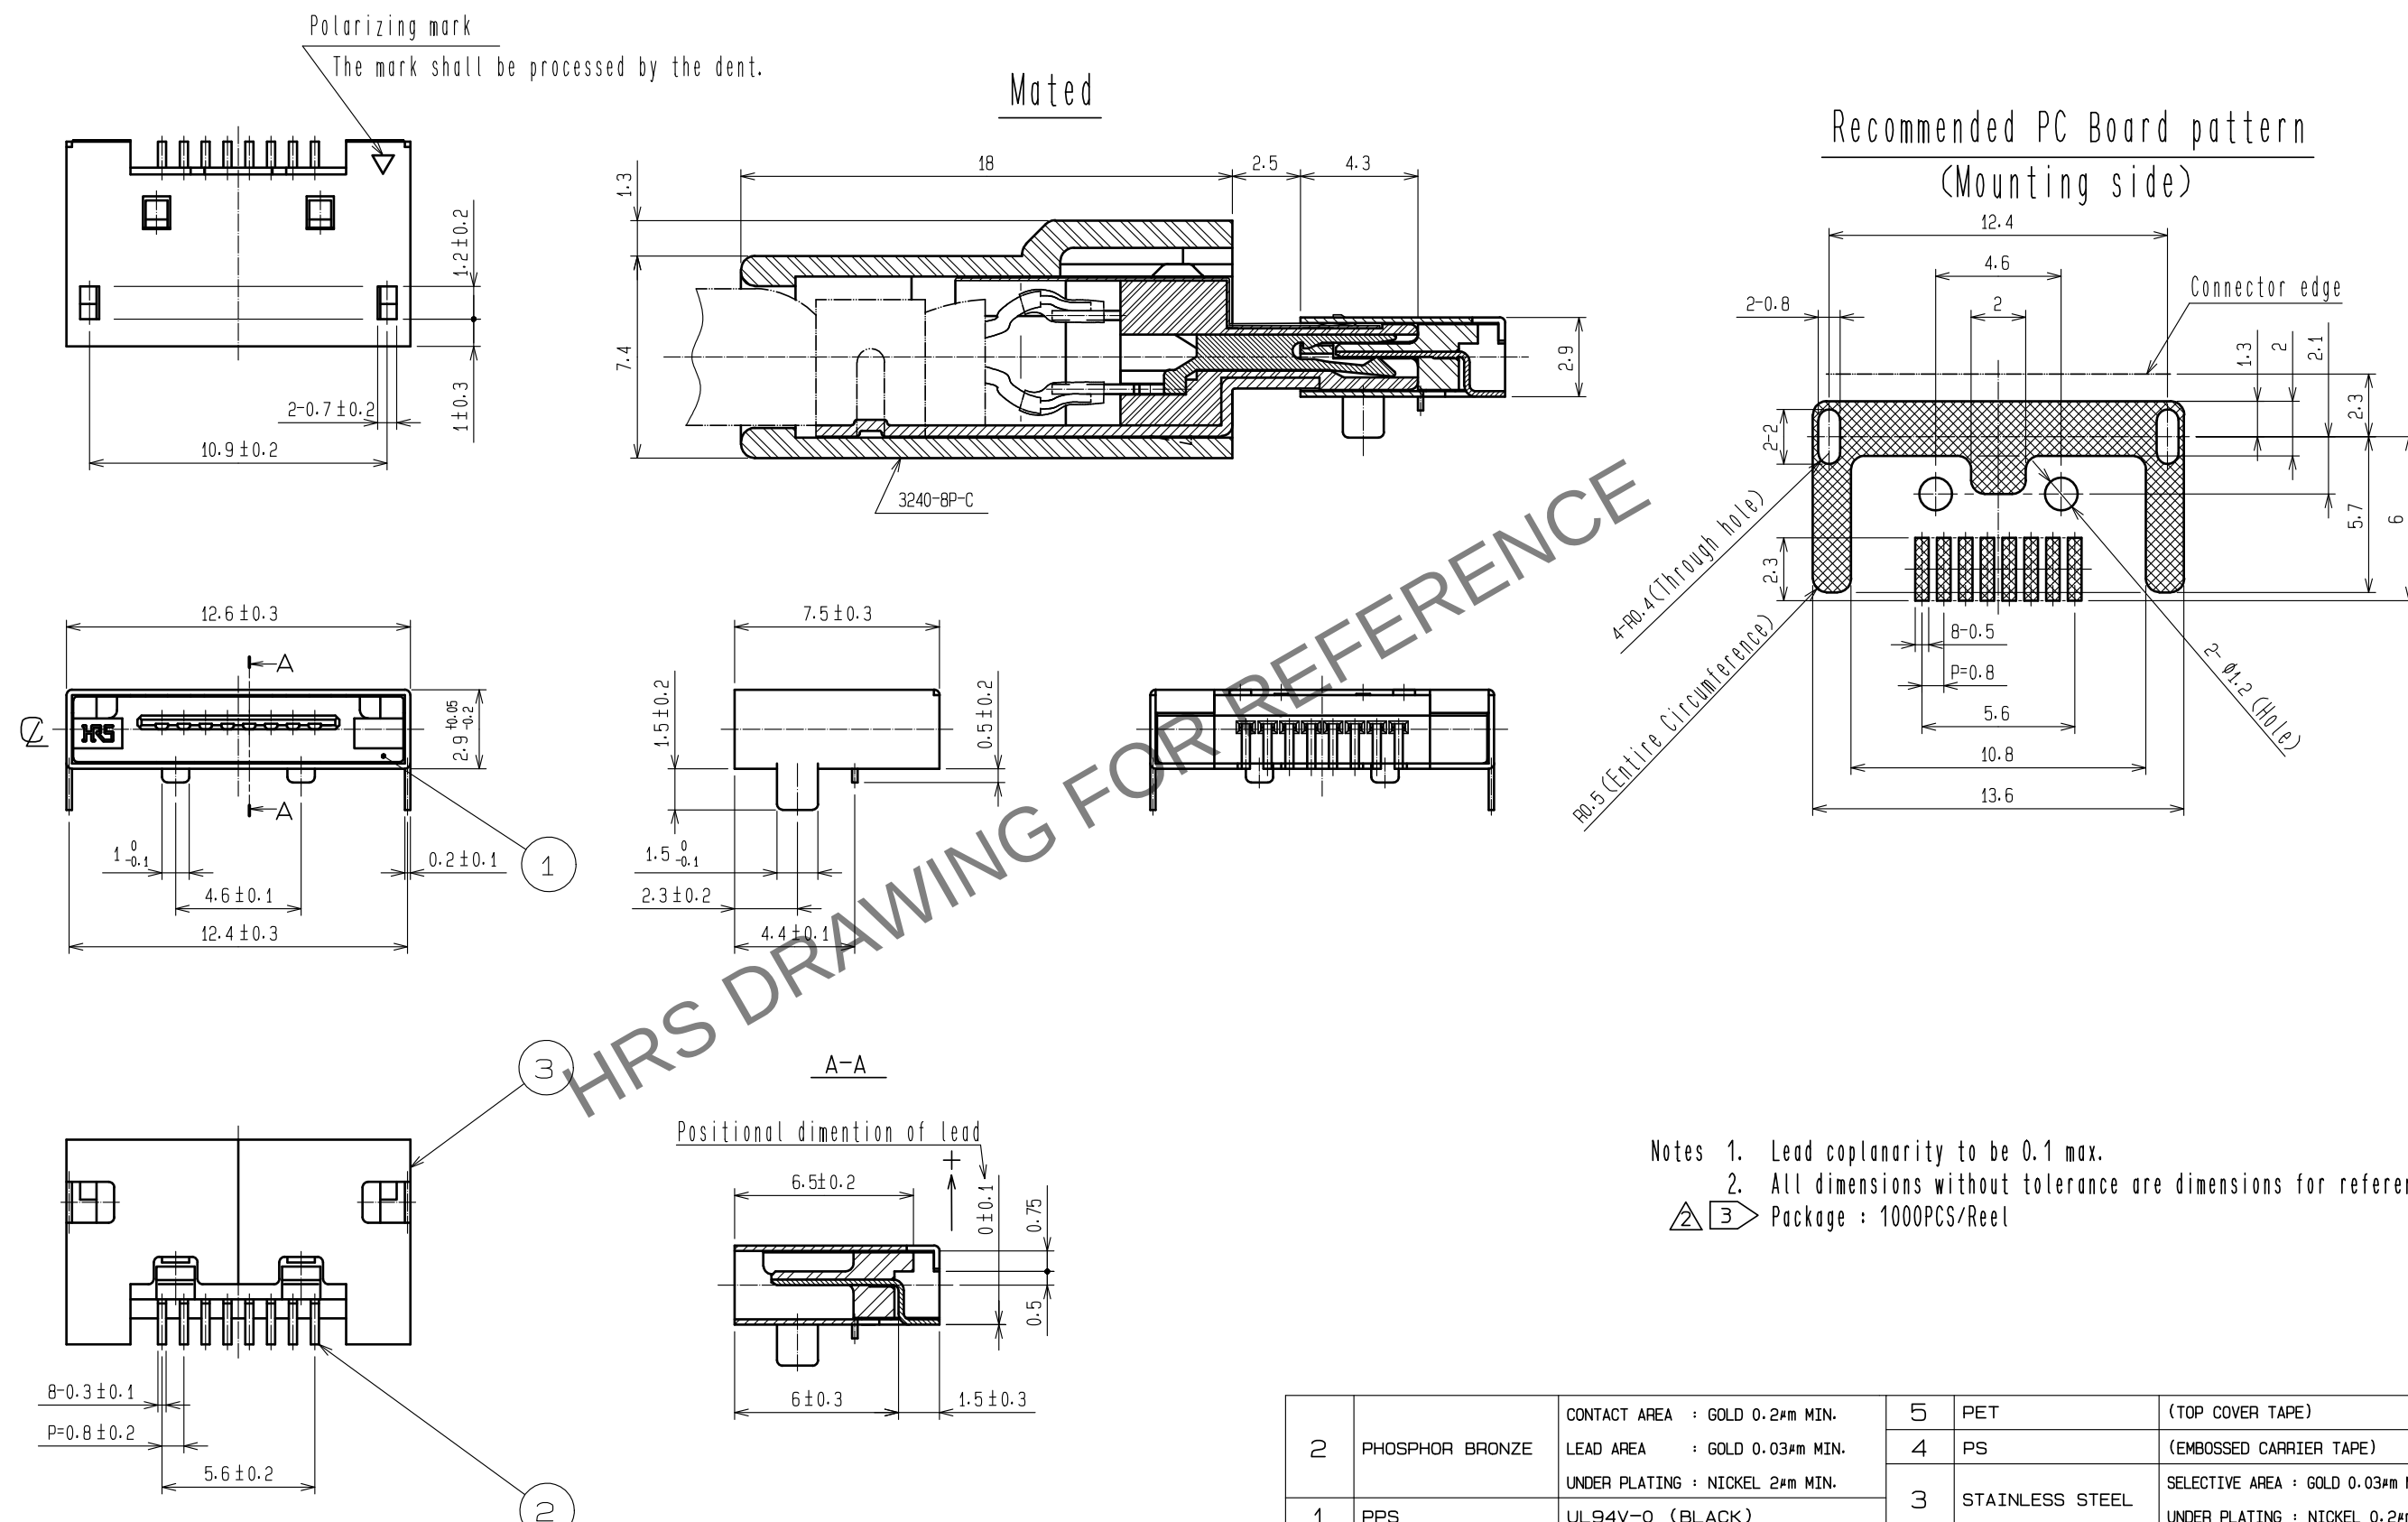

Notes 1. Lead coplanarity to be 0.1 max.
2. All dimensions without tolerance are dimensions for reference.
3 Package : 1000PCS/Reel

2	PHOSPHOR BRONZE	CONTACT AREA : GOLD 0.2μm MIN.	5	PET	(TOP COVER TAPE)
		LEAD AREA : GOLD 0.03μm MIN.	4	PS	(EMBOSSD CARRIER TAPE)
		UNDER PLATING : NICKEL 2μm MIN.	3	STAINLESS STEEL	SELECTIVE AREA : GOLD 0.03μm MIN.
		UL94V-0 (BLACK)			UNDER PLATING : NICKEL 0.2μm MIN.
1	PPS	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 4 : 1	COUNT 7	DESCRIPTION OF REVISIONS DIS-E-00011412	
HIROSE ELECTRIC CO., LTD.		APPROVED : A0. SUZUKI	20060510	DESIGNED KN. ICHIKAWA	CHECKED KG. OKITA
		CHECKED : NF. MIYAZAKI	20060510	DATE 20221102	
		DESIGNED : HN. ANDO	20060510	DRAWING NO. EDC3-046586-03	
		DRAWN : HN. ANDO	20060510	PART NO. 3260-8S3(56)	
				CODE NO. CL0232-0010-5-56	1/2

Nov.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

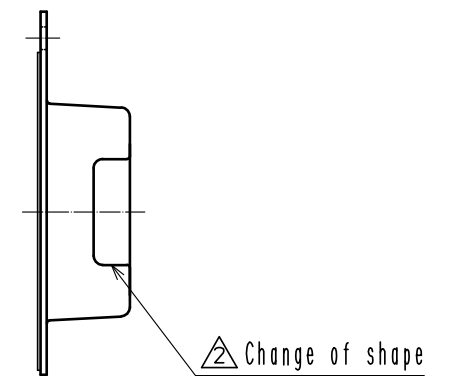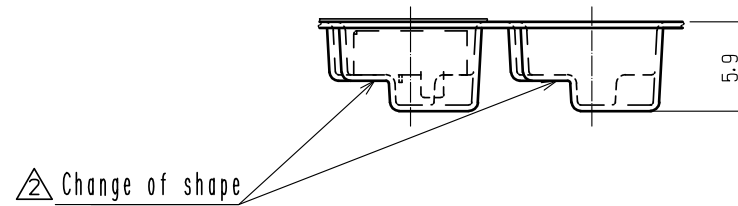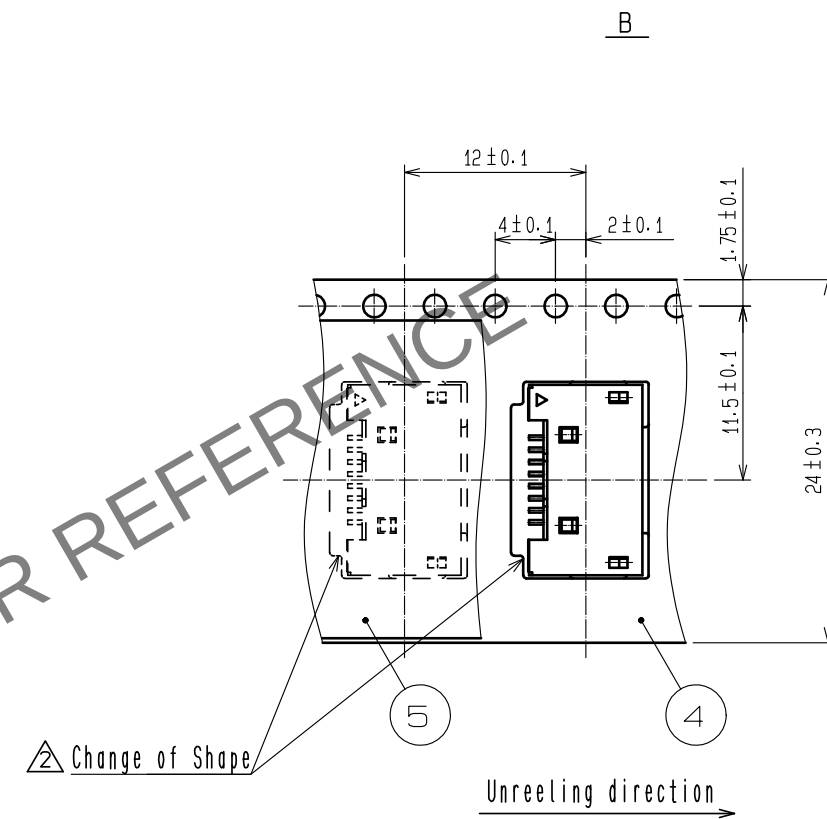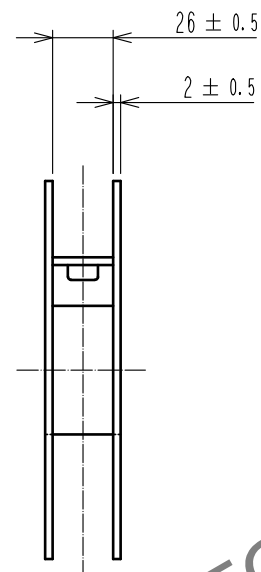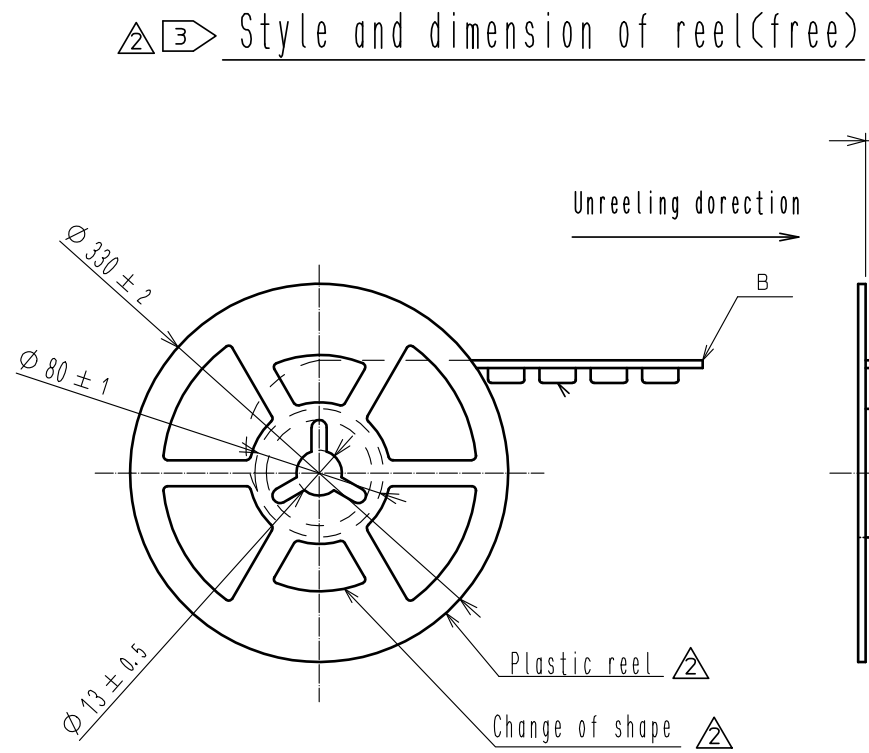

HRS

DRAWING NO.	EDC3-046586-03
PART NO.	3260-8S3(56)
CODE NO.	CL0232-0010-5-56

△ 2/2