
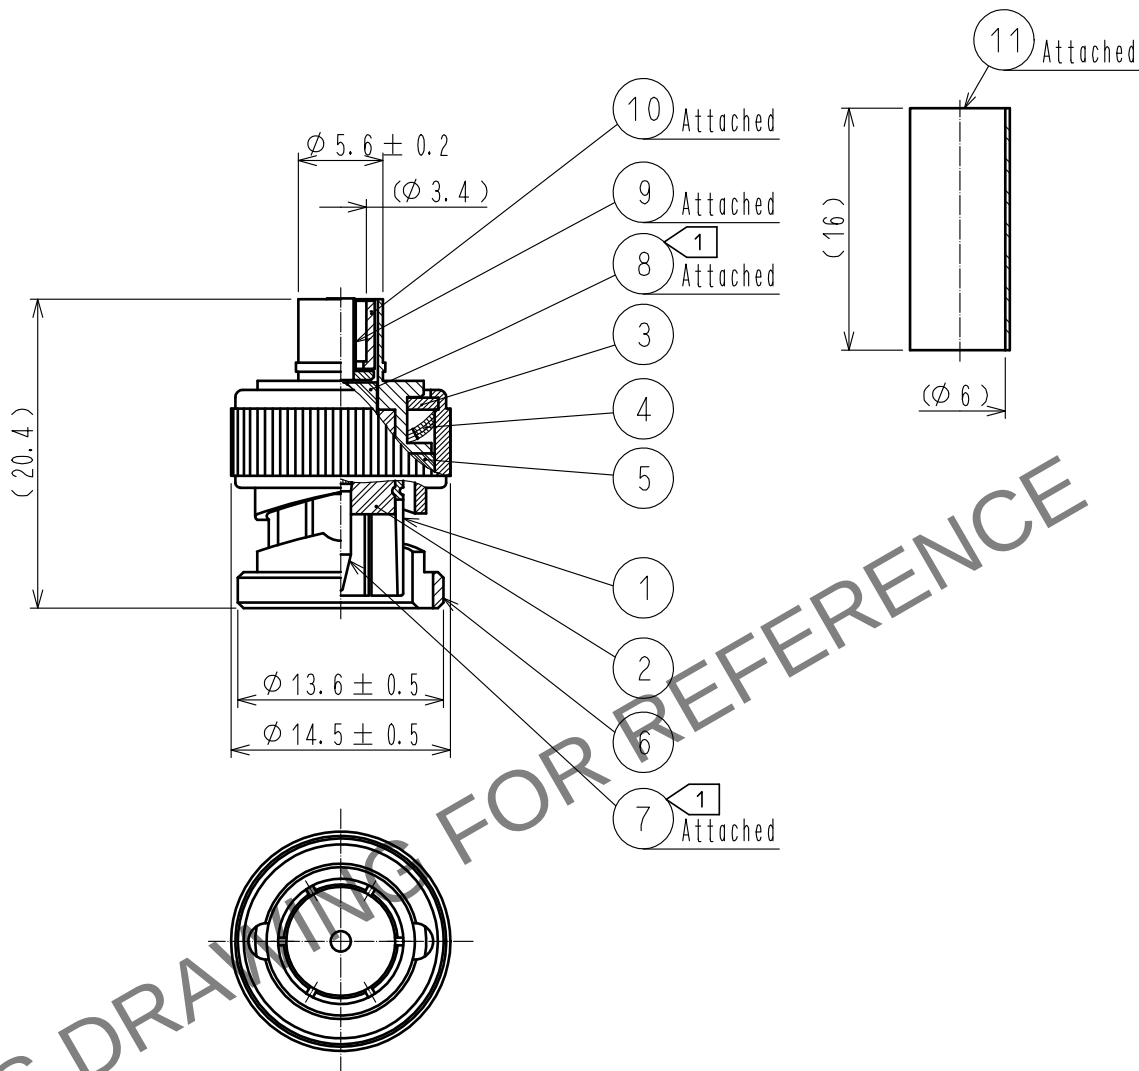


Nov.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

【 Assemble tool 】 For outer conductor crimping : HT303/HRM-T-4(58A/U hole)



Note 1 Part 7 and 8 will be attached in a sub assembled state.

6	BRASS	NICKEL PLATING									
5	SILICONE RUBBER			11	POLYOLEFIN	HEAT SHRINK TUBING(BLACK)					
4	BERYLLIUM COPPER	SILVER PLATING		10	BRASS	NICKEL PLATING					
3	BRASS	NICKEL PLATING		9	BRASS	NICKEL PLATING					
2	PTFE			8	PTFE						
1	BRASS	NICKEL PLATING		7	BRASS	GOLD PLATING					
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS					
UNITS mm				SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED : KY. SHIMIZU		20191121	DRAWING NO.		EDC-305440-00-00				
		CHECKED : KY. SHIMIZU		20191121	PART NO.		BNC(75)-P-1.5CV				
		DESIGNED : RO. YOKOYAMA		20191121	CODE NO.		CL302-0404-7-00				
		DRAWN : ST. KISHI		20191121			 1/1				