

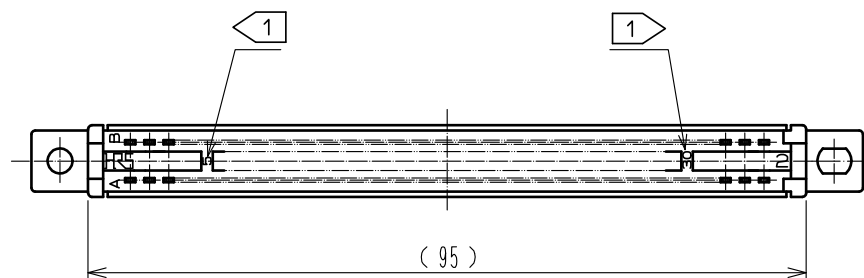
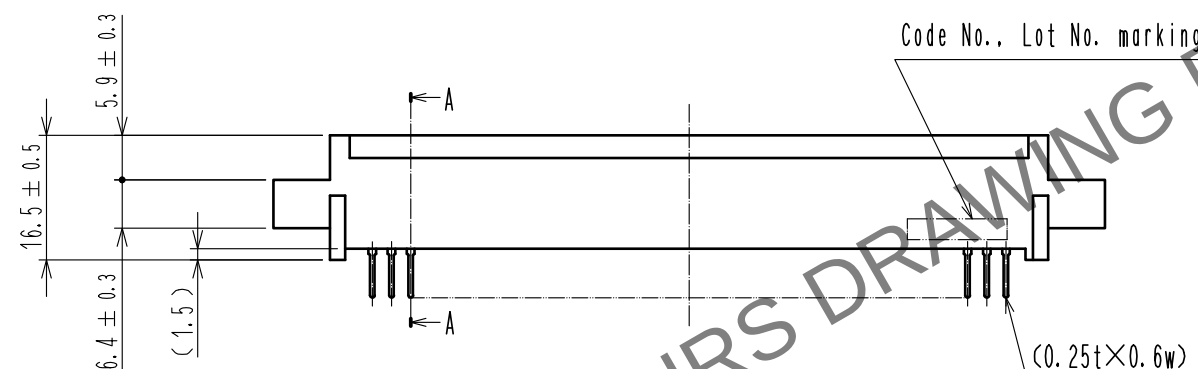
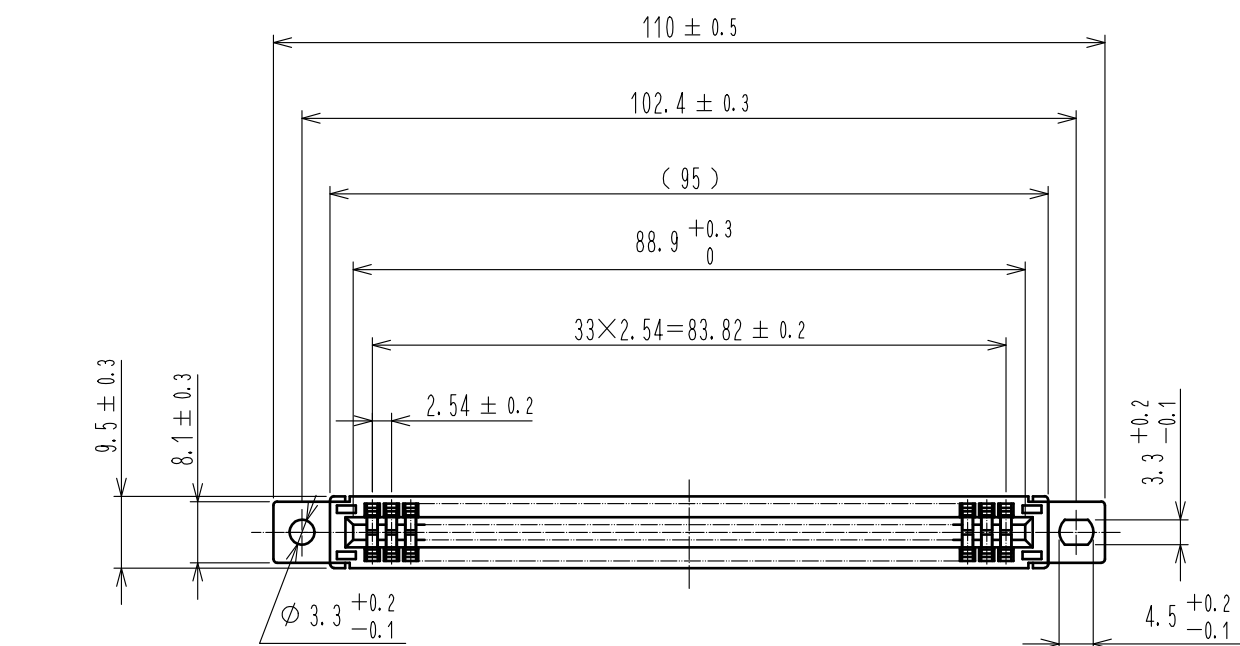


May.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

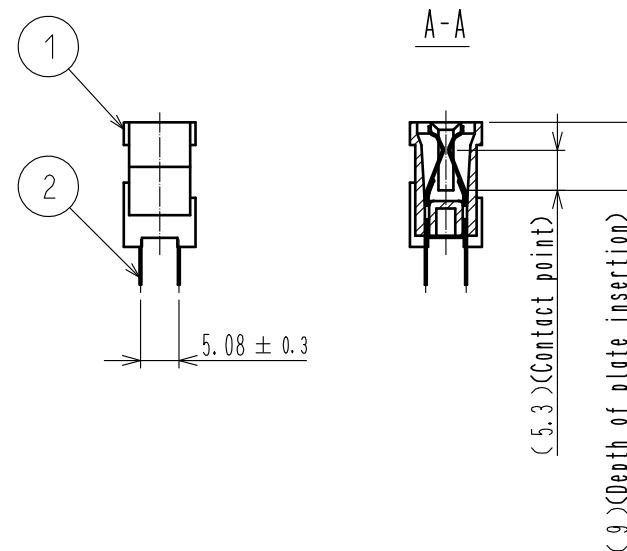

Recommended PC board hole pattern (t=1.6±0.1)

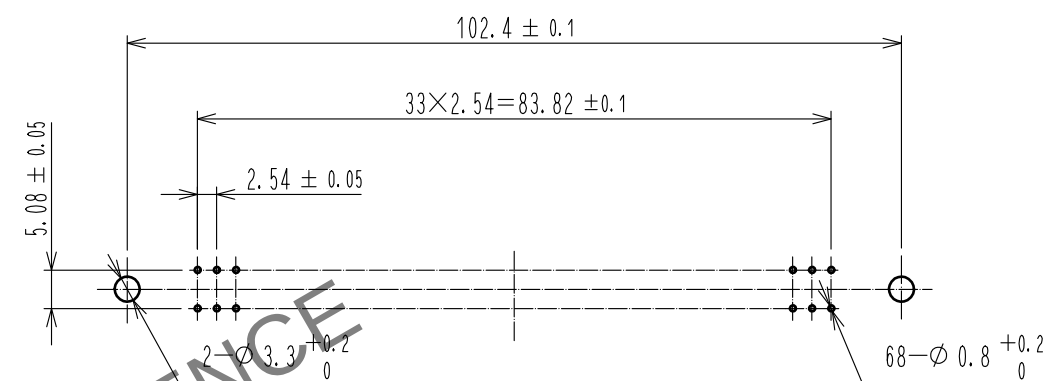

- Notes 1 Contact No. (5, 10, 15, 20, 25, 30) are shown.
2 A polarizing key inserted between the following contact positions.
(5 to 6), (10 to 11), (15 to 16), (20 to 21), (25 to 26), (30 to 31).
3 The dimensions in parentheses are for reference.

1 PBT		BLACK	UL94V-0	2 PHOSPHOR BRONZE		<Contact area>Ni2.5μm+Au0.05μm	
NO.		MATERIAL		FINISH . REMARKS		<Mounting area>Ni2.5μm+Sn2μm	
UNITS		SCALE		COUNT		DESCRIPTION OF REVISIONS	
mm		1 : 1		△		DESIGNED	
HRS		HIROSE ELECTRIC CO., LTD.		APPROVED : HT. YAMAGUCHI		18.06.25	
				CHECKED : HT. YAMAGUCHI		18.06.25	
				DESIGNED : TY. EDAGAWA		18.06.25	
				DRAWN : MK. OKI		18.06.21	
				DRAWING NO.		EDC-017833-70-01	
				PART NO.		CR22-68D-2.54DS(70)	
				CODE NO.		CL522-0017-1-70	
						1/1	