


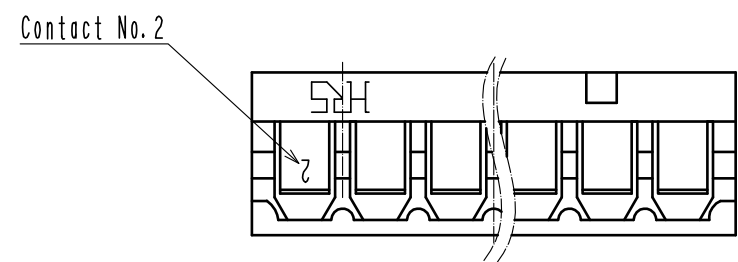
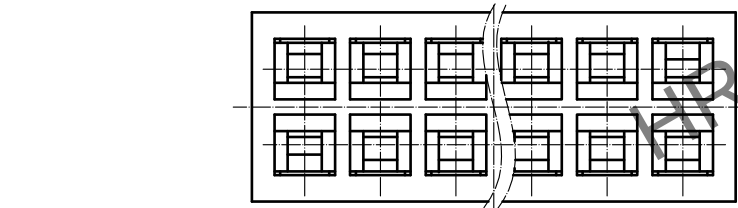
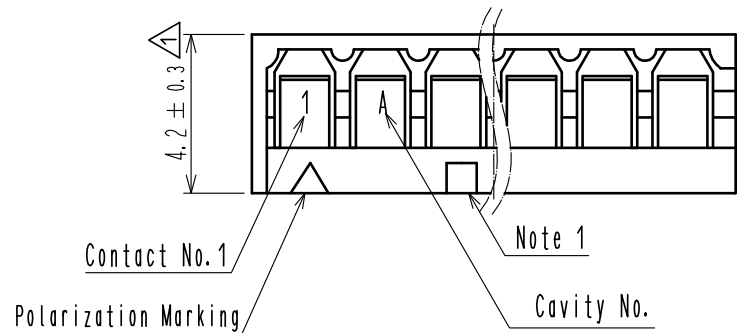



Mar.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

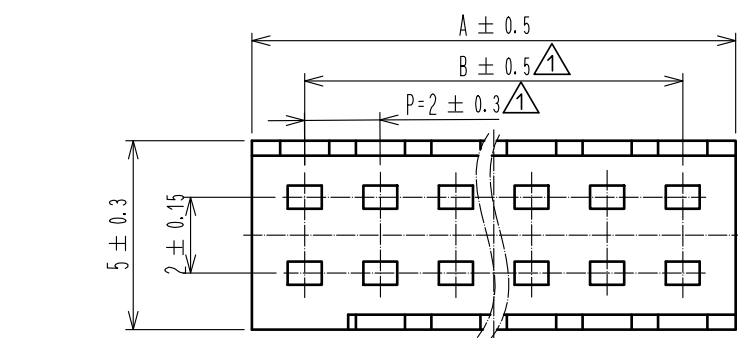

△ Crimp contact insertion drawing

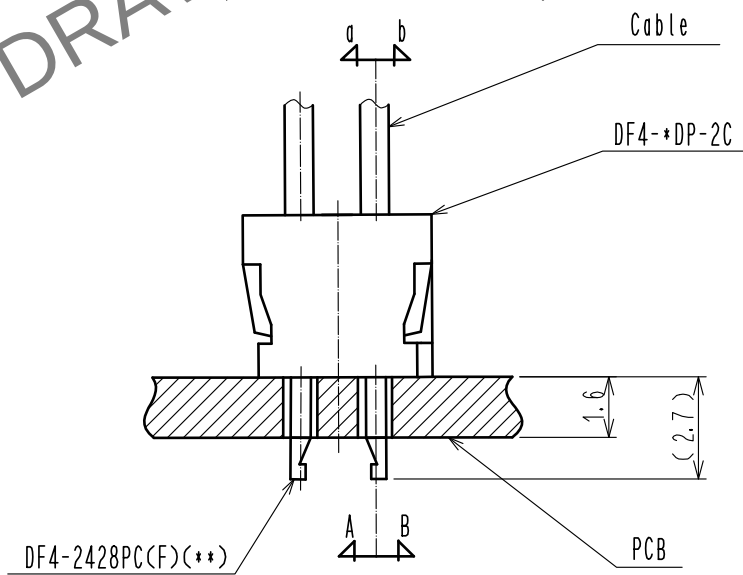

Part No.	Code No.	Number of contact	A	B
DF4- 4DP-2C	544-0078-3	4	4.8	2.0
DF4- 6DP-2C	544-0079-6	6	6.8	4.0
DF4- 8DP-2C	544-0080-5	8	8.8	6.0
DF4-10DP-2C	544-0081-8	10	10.8	8.0
DF4-12DP-2C	544-0082-0	12	12.8	10.0
DF4-14DP-2C	544-0083-3	14	14.8	12.0
DF4-16DP-2C	544-0084-6	16	16.8	14.0
DF4-18DP-2C	544-0085-9	18	18.8	16.0
DF4-20DP-2C	544-0086-1	20	20.8	18.0
DF4-22DP-2C	544-0087-4	22	22.8	20.0
DF4-24DP-2C	544-0088-7	24	24.8	22.0
DF4-26DP-2C	544-0089-0	26	26.8	24.0
DF4-28DP-2C	544-0090-9	28	28.8	26.0
DF4-30DP-2C	544-0091-1	30	30.8	28.0
DF4-32DP-2C	544-0092-4	32	32.8	30.0

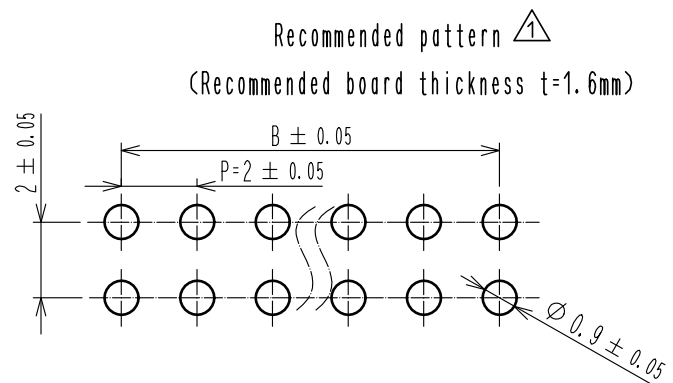

- Note 1. Square marks are indicated in relief on the part of following contact No. : 5,10,15,20,25,30
2. Recommended PCB hole diameter $0.9 \pm 0.05\text{mm}$
3. In case of some thin jacket wires, tips are hard to put together. however, the way of holding these wires makes easier to put them into PCB.
Ex. When the direction of contact tip is (A), Please hold a wire to the direction(a).

				1	Polyamide		UL94V-0 (BLACK)							
NO.	MATERIAL		FINISH .		REMARKS		NO.	MATERIAL		FINISH .		REMARKS		
UNITS mm		SCALE 5 : 1		COUNT 6	DESCRIPTION OF REVISIONS DIS-H-00004425				DESIGNED HT. SATO		CHECKED SZ. ONO		DATE 20181116	
 HIROSE ELECTRIC CO., LTD.			APPROVED : KJ. KATAYOSE			20050105		DRAWING NO.		EDC-160366-00-00				
			CHECKED : TY. OMA			20050105		PART NO.		DF4- * DP-2C				
			DESIGNED : IO. DENPOUYA			20050105		CODE NO.		CL544				
			DRAWN : IO. DENPOUYA			20050105				 1 / 1				