

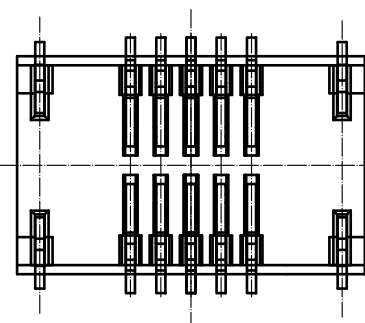
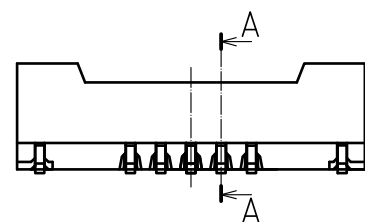


Nov.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

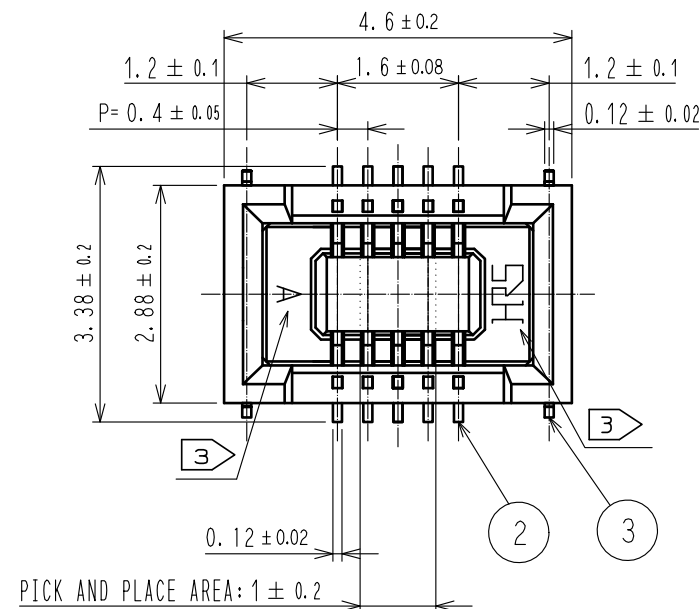


NOTE 1. ALL LEADS CO-PLANARITY SHALL BE 0.1 MAX.
2. IS NO PATTERN AREA OTHER THAN THE SAME CIRCUIT.
3. HRS MARK AND CAV NO. ARE INDICATED IN APPROX. POSITION SHOWN.

RECOMMENDED PATTERN

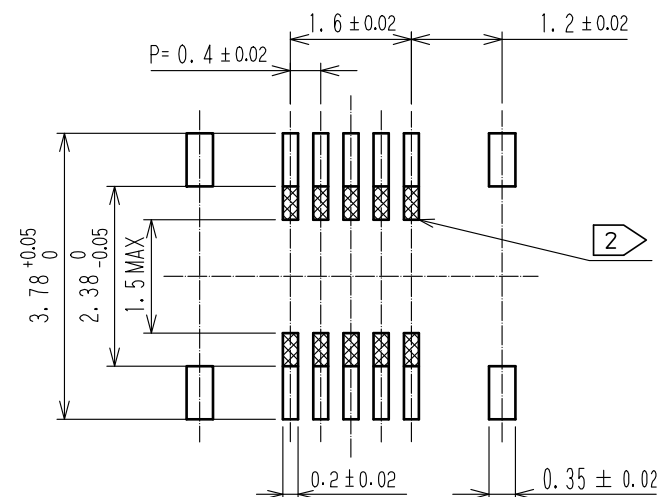



RECOMMENDED METAL MASK THICKNESS : 120 μ m
RECOMMENDED MASK OPENING RATIO : 80% FOR LEAD PAD

A-A(20:1)

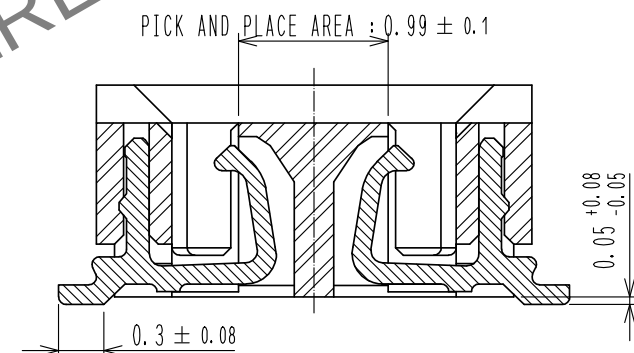


ENGAGEMENT FIGURE (20:1)

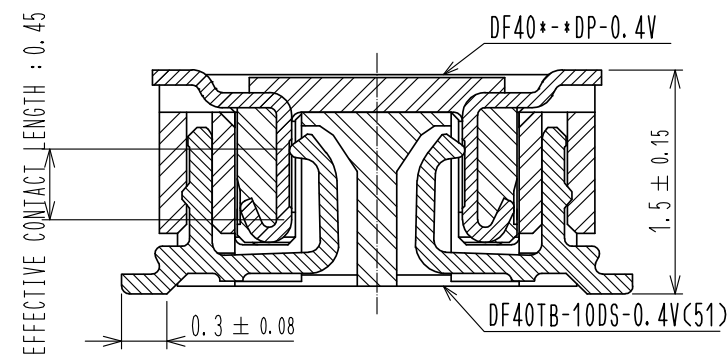


△	3	COPPER ALLOY	GOLD 0.05μm MIN UNDERPLATING:NICKEL 1μm MIN	7	PS	CLEAR-REINFORCEMENT COLLAR			
	2	COPPER ALLOY	GOLD 0.05μm MIN UNDERPLATING:NICKEL 1μm MIN	6	PS	BLACK-PLASTIC REEL			
				5	POLYESTER	CLEAR- COVER TAPE			
	1	LCP	UL94V-0- BLACK	4	PS	CLEAR(EMBOSSED CARRIER TAPE)			
NO.		MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS			
UNITS mm			SCALE 10 : 1		COUNT 1	DESCRIPTION OF REVISIONS DIS-H-00005725	DESIGNED YK. SATAKE	CHECKED TS. MIYAZAKI	DATE 20200204
 HIROSE ELECTRIC CO., LTD.			APPROVED : WR. FUKUCHI		20191122	DRAWING NO. EDC-388250-51-00			
			CHECED : TS. MIYAZAKI		20191122	PART NO. DF40TB-10DS-0.4V(51)			
			DESIGNED : YK. SATAKE		20191122	CODE NO. CL684-4273-0-51			
			DRAWN : YK. SATAKE		20191122				
						 1/2			

EMBOSSED CARRIER TAPE PACKAGING (5:1)

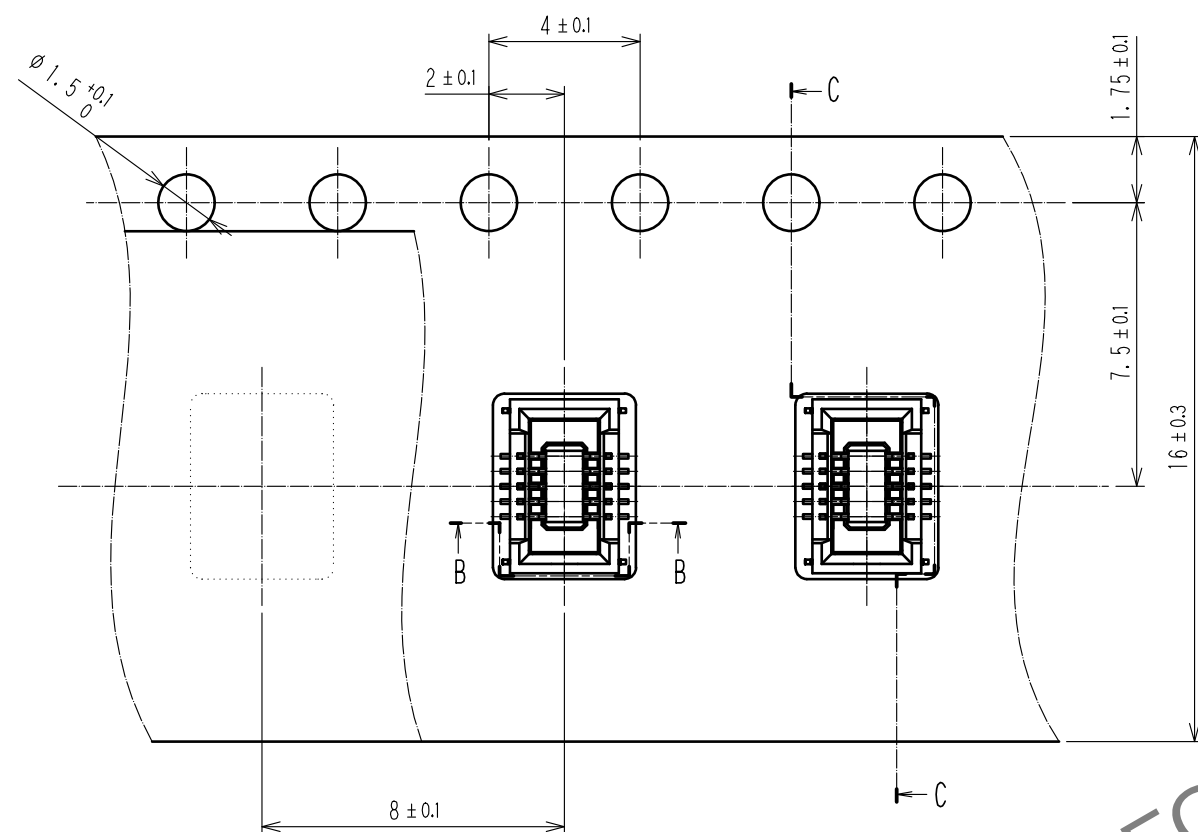


DIRECTION OF UNREELING




- NOTES
- PER REEL 5000 CONNECTORS.
 - THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
 - REFER TO JIS C 0806 (PACKING OF COMPONENTS FOR AUTOMATIC HANDLING)
 - AFTER PACKAGING, ROLL 2 METERS OF THE REINFORCEMENT COLLAR TO OUTER CIRCUMFERENCE OF TAPE AND REEL POCKET, AND TAPE DOWN AT THE END THE COLLAR.

STYLE AND DIMENSIONS OF REEL (FREE)

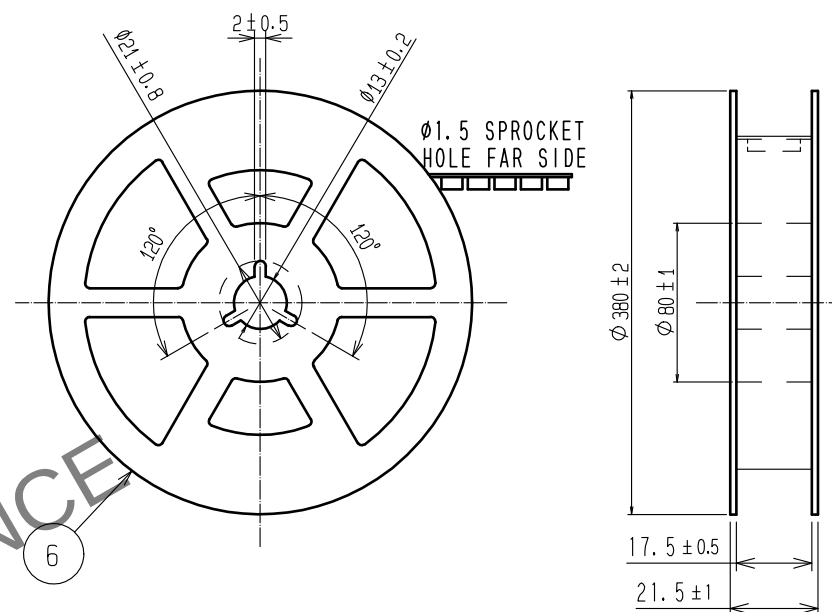

PORTION EQUIPPED WITH CONNECTORS (FREE)

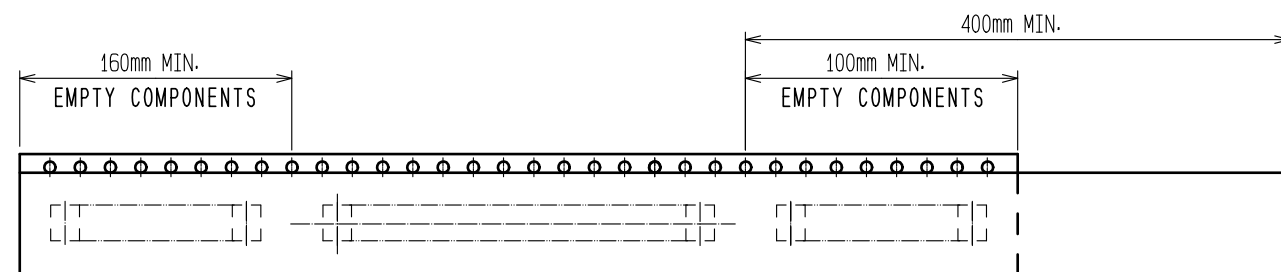


TRAILER

6 TAPING

LEADER

H-H (FREE)

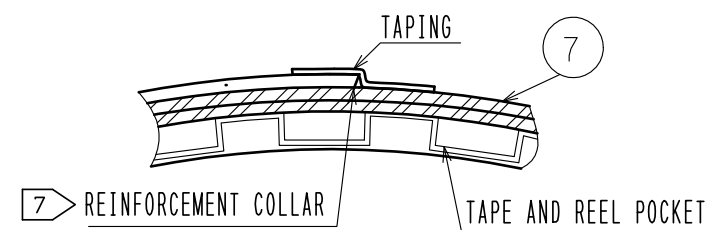

HRS

DRAWING NO.	EDC-388250-51-00
PART NO.	DF40TB-10DS-0.4V (51)
CODE NO.	CL684-4273-0-51