
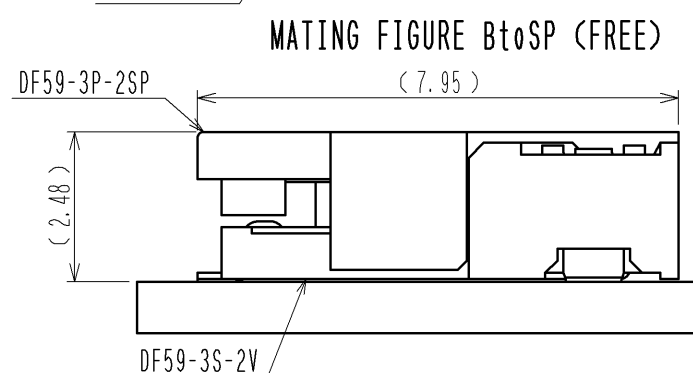
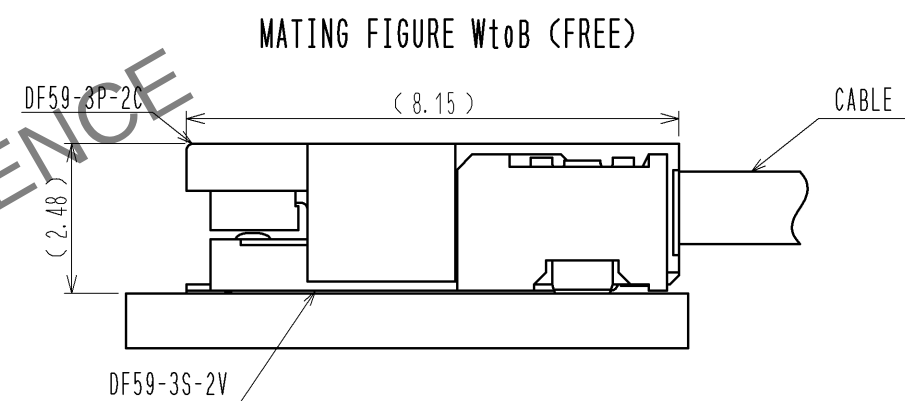
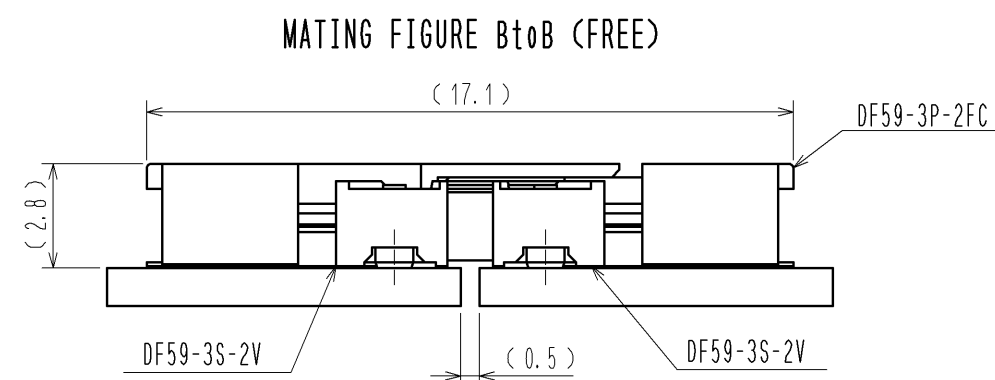


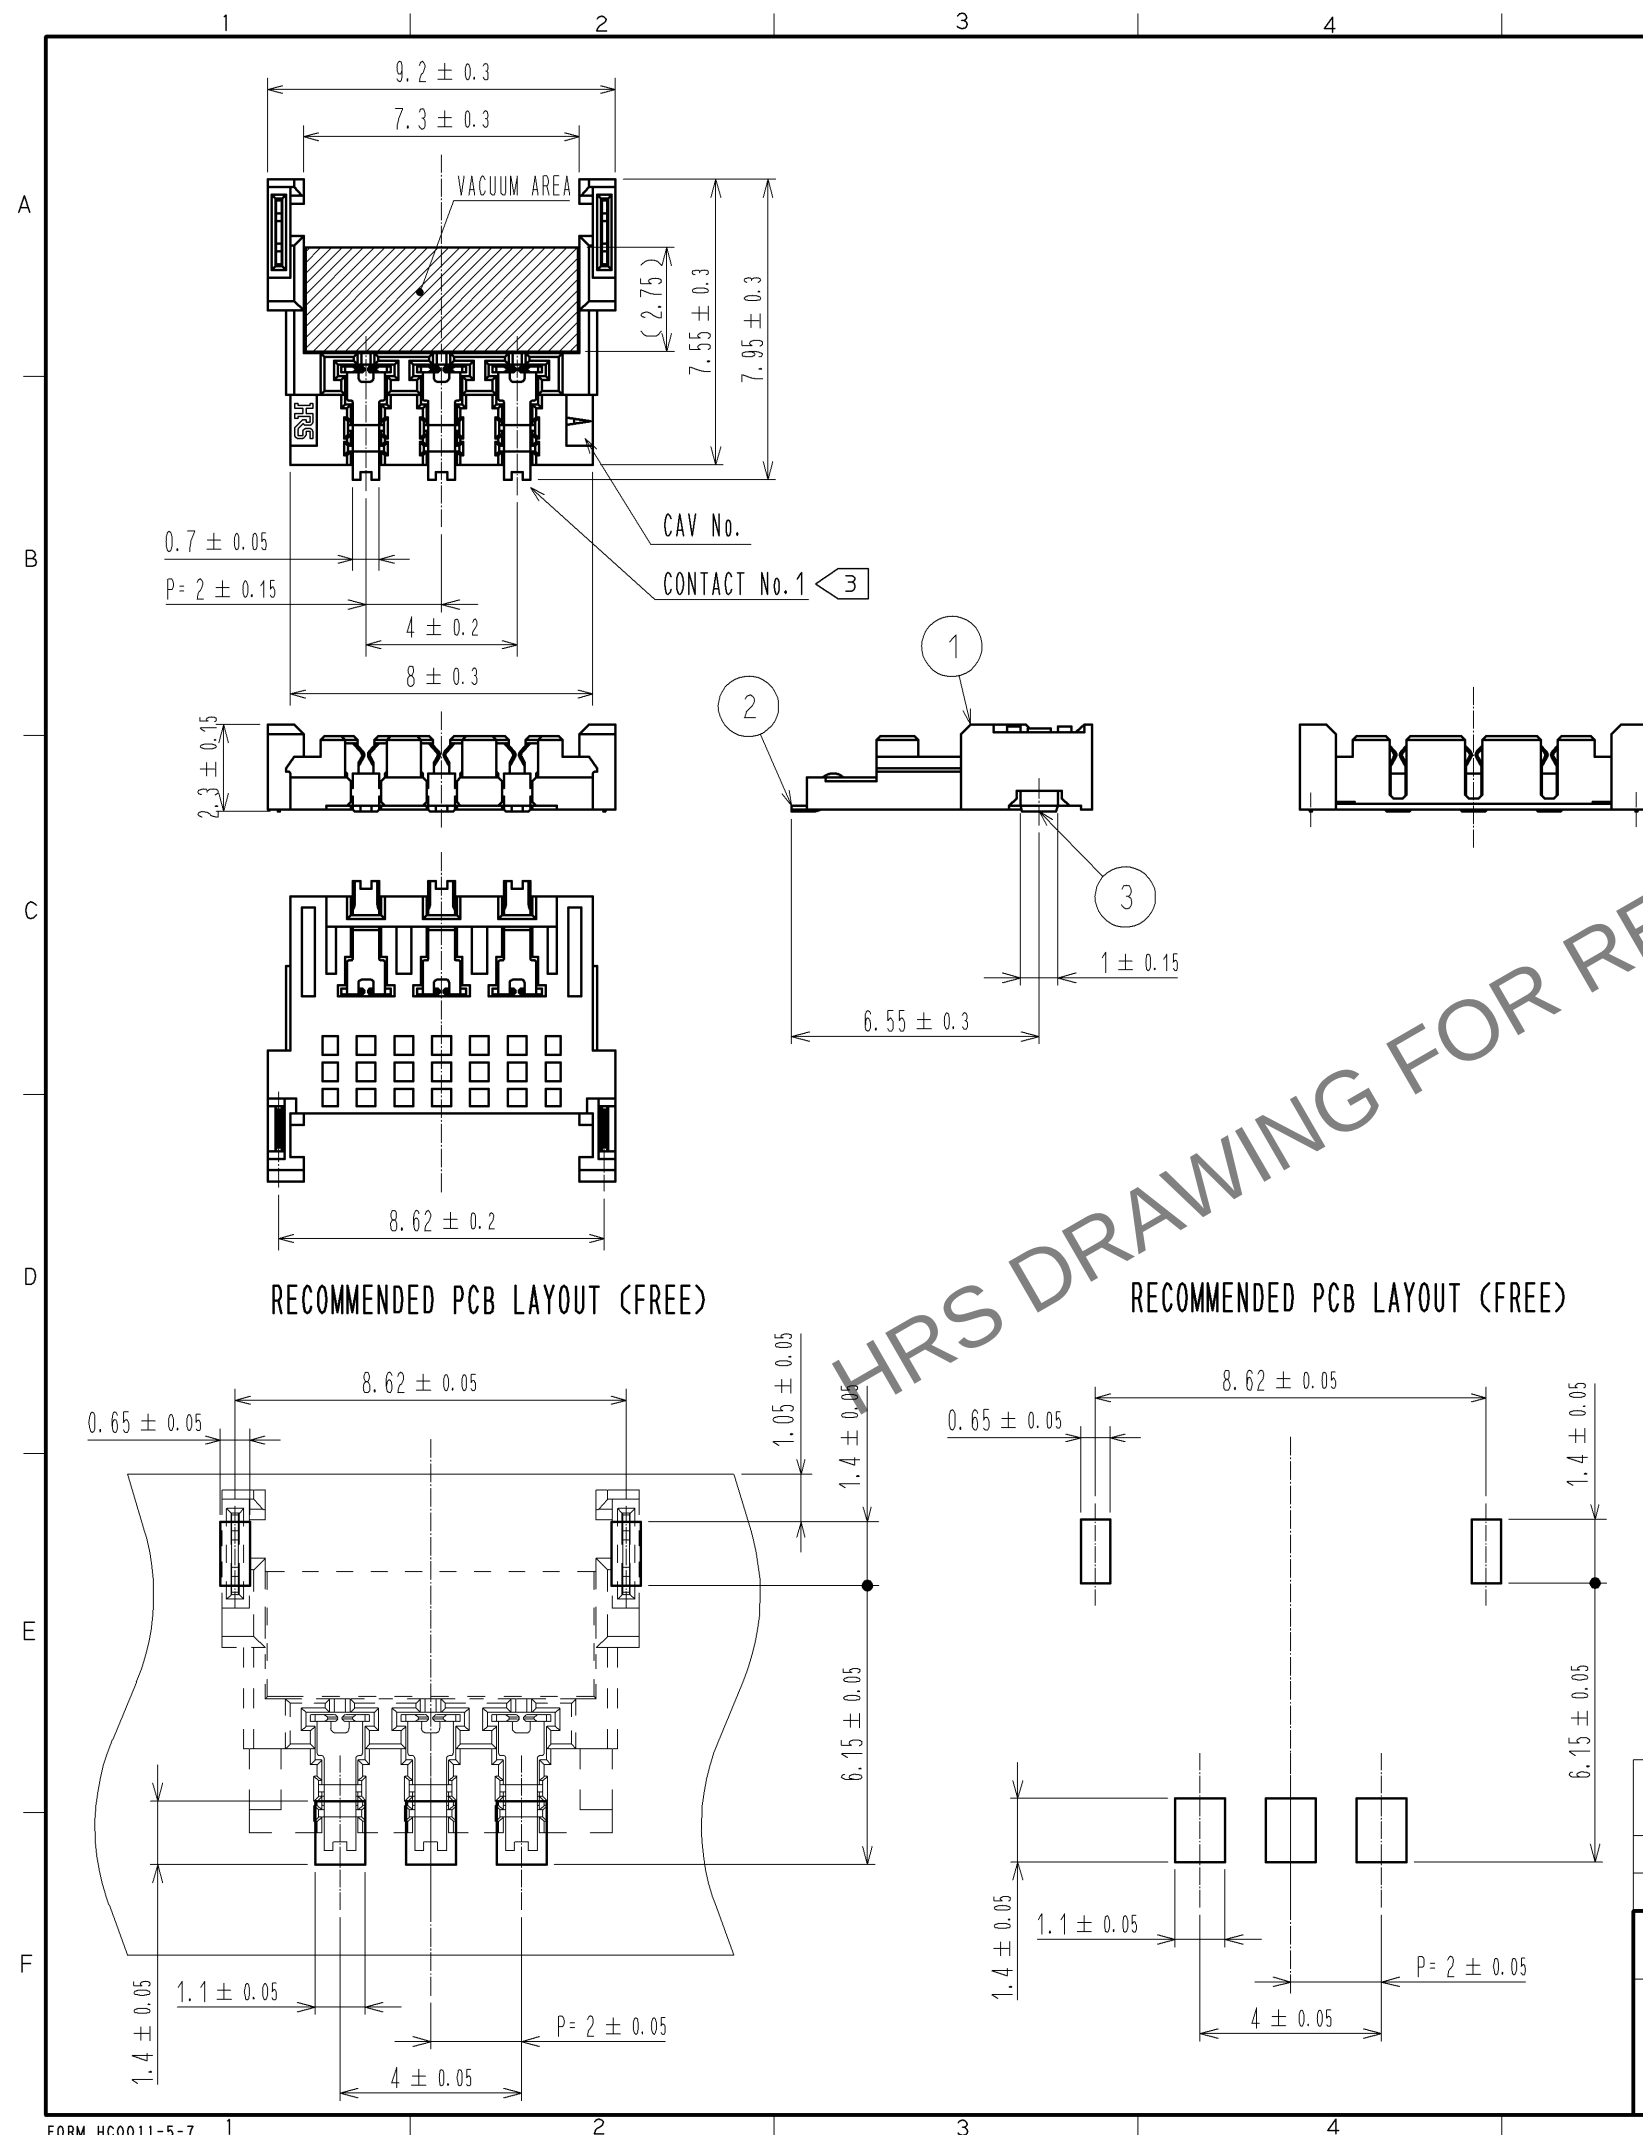

2. () IS REFERENCE DIMENSION.

3 MATING DF59-3P-2C, DF59-3P-2SP ARE APPLIED.

4. REFER TO THE DF59 SERIES MATING/UNMATING OPERATION INSTRUCTION MANUAL(ETAD-H0496) FOR THE OPERATING OF THE PRODUCT.

3 5. UL(FILE NO. E52653),

C-UL(FILE NO. E52653) APPROVED PRODUCT.



C-UL(FILE NO. E52653) APPROVED PRODUCT.				6	PS	REEL , BLACK
				5	POLYESTER	CLEAR(COVER TAPE)
2	PHOSPHOR BRONZE	CONTACT AREA : GOLD PLATING 0.2μm MIN LEAD AREA : TIN PLATING 1μm MIN UNDER PLATING : NICKEL PLATING 0.5μm MIN		4	PS	CLEAR(EMBOSSED CARRIER TAPE)
1	LCP	UL94V-0,BEIGE		3	PHOSPHOR BRONZE	SURFACE : TIN PLATING 1μm MIN UNDER PLATING : NICKEL PLATING 0.5μm MIN
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS

UNITS mm		SCALE 5 : 1	COUNT 3 5	DESCRIPTION OF REVISIONS DIS-H-006828	DESIGNED MI. SAKIMURA	CHECKED HK. UMEHARA	DATE 12. 04. 21
HIROSE ELECTRIC CO., LTD.		APPROVED : KI. AKIYAMA	10. 09. 28	DRAWING NO. EDC3-330589-01			
		CHECKED : OM. MIYAMOTO	10. 09. 27	PART NO. DF59-3S-2V(51)			
		DESIGNED : KT. ISHII	10. 09. 27	CODE NO. CL667-0002-3-51			
		DRAWN : KT. ISHII	10. 09. 27				

