
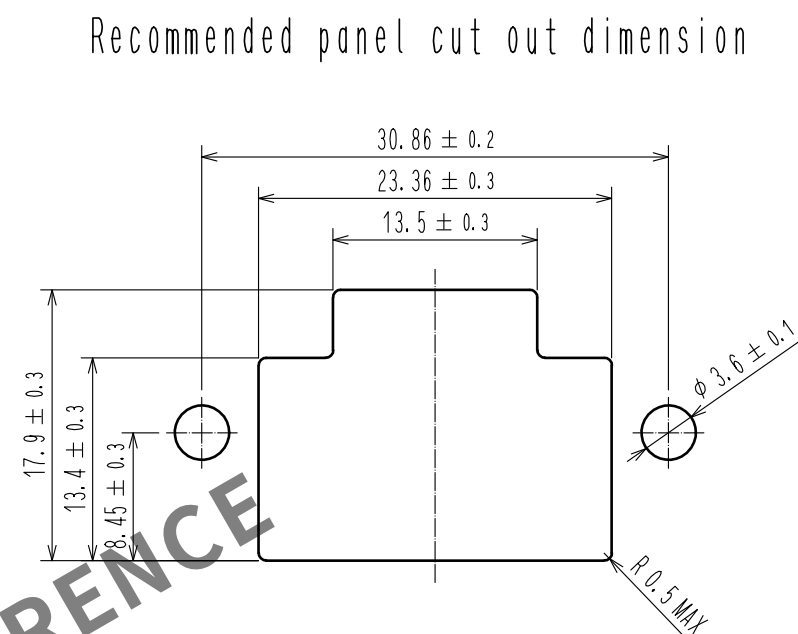
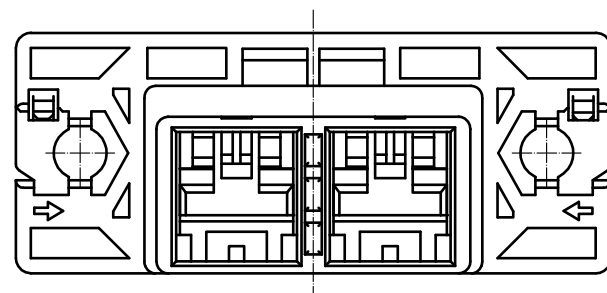


Aug.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.




Technical drawing of the DF60R-2S-10.16C valve assembly in a side view. The drawing shows the main body, handle, and actuator. Dimensions are indicated: a length of (47.1) and a height of (18). Callouts point to the DF60R-2EP-10.16C and DF60R-2S-10.16C components.

- 


		1		PBT		Gray , UL94V-0	
NO.		MATERIAL		FINISH , REMARKS			
NO.		MATERIAL		FINISH , REMARKS			
UNITS mm				SCALE 2 : 1			
		COUNT		DESCRIPTION OF REVISIONS		DESIGNED	
						CHECKED	
						DATE	
 HIROSE ELECTRIC CO., LTD.		APPROVED : KI. AKIYAMA		15. 07. 06		DRAWING NO. EDC-363801-00-00	
		CHECKED : TS. FUKUSHIMA		15. 07. 03		PART NO. DF60R-2EP-10. 16C	
		DESIGNED : TS. KUMAZAWA		15. 07. 03		CODE NO. CL680-3053-0-00	
		DRAWN : TS. KUMAZAWA		15. 07. 03		 	

DF60 IN-LINE TYPE RECOMMENDED PANEL MOUNTING MANUAL (WHEN NUTS USES)


NUT INSTALLATION PROCESS

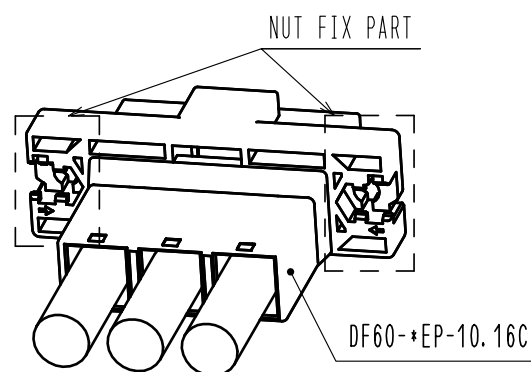

1. SLIDE A NUT (SIZE:M3) TO NUT FIX PART.

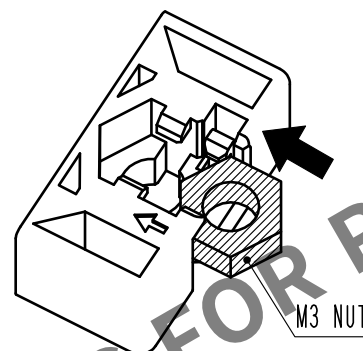


2. PRESS DOWN THE NUT UNTIL IT CLICKS,
THEN THIS SOUND MEANS THE NUT HAS INSERTED
INTO NUT HOLDER.

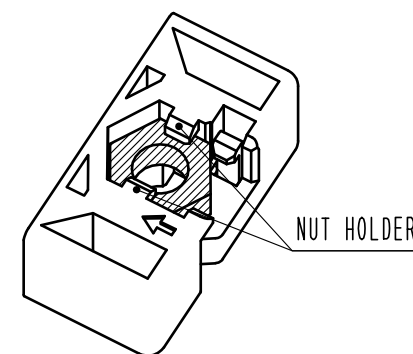


PANEL MOUNTING PROCESS

1. INSERT CONNECTOR INTO PANEL CUT OUT PART.

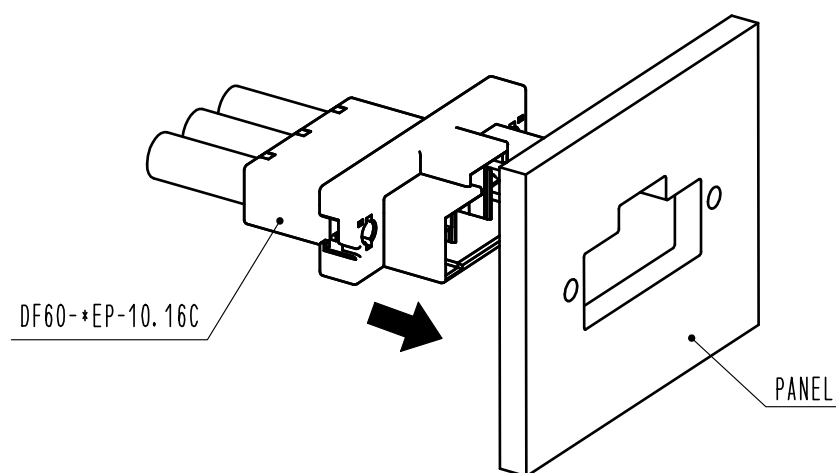

2. TIGHTEN A SCREW (SIZE:M3) TO FIX WITH PANEL.
RECOMMENDED TORQUE : LESS THAN 49N · cm

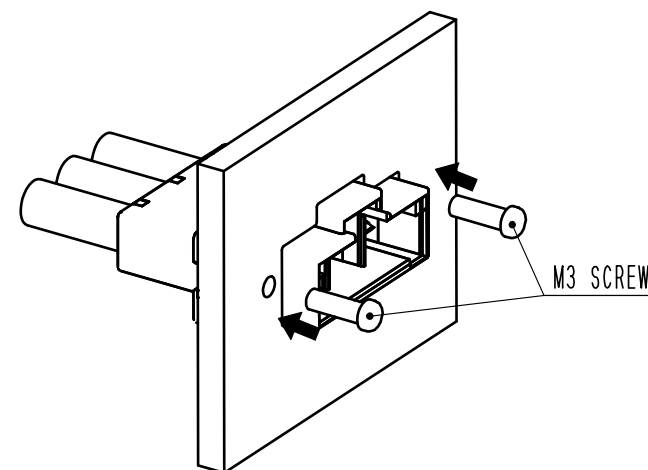

HRS

DRAWING NO.	EDC-363801-00-00
PART NO.	DF60R-2EP-10.16C
CODE NO.	CL680-3053-0-00