
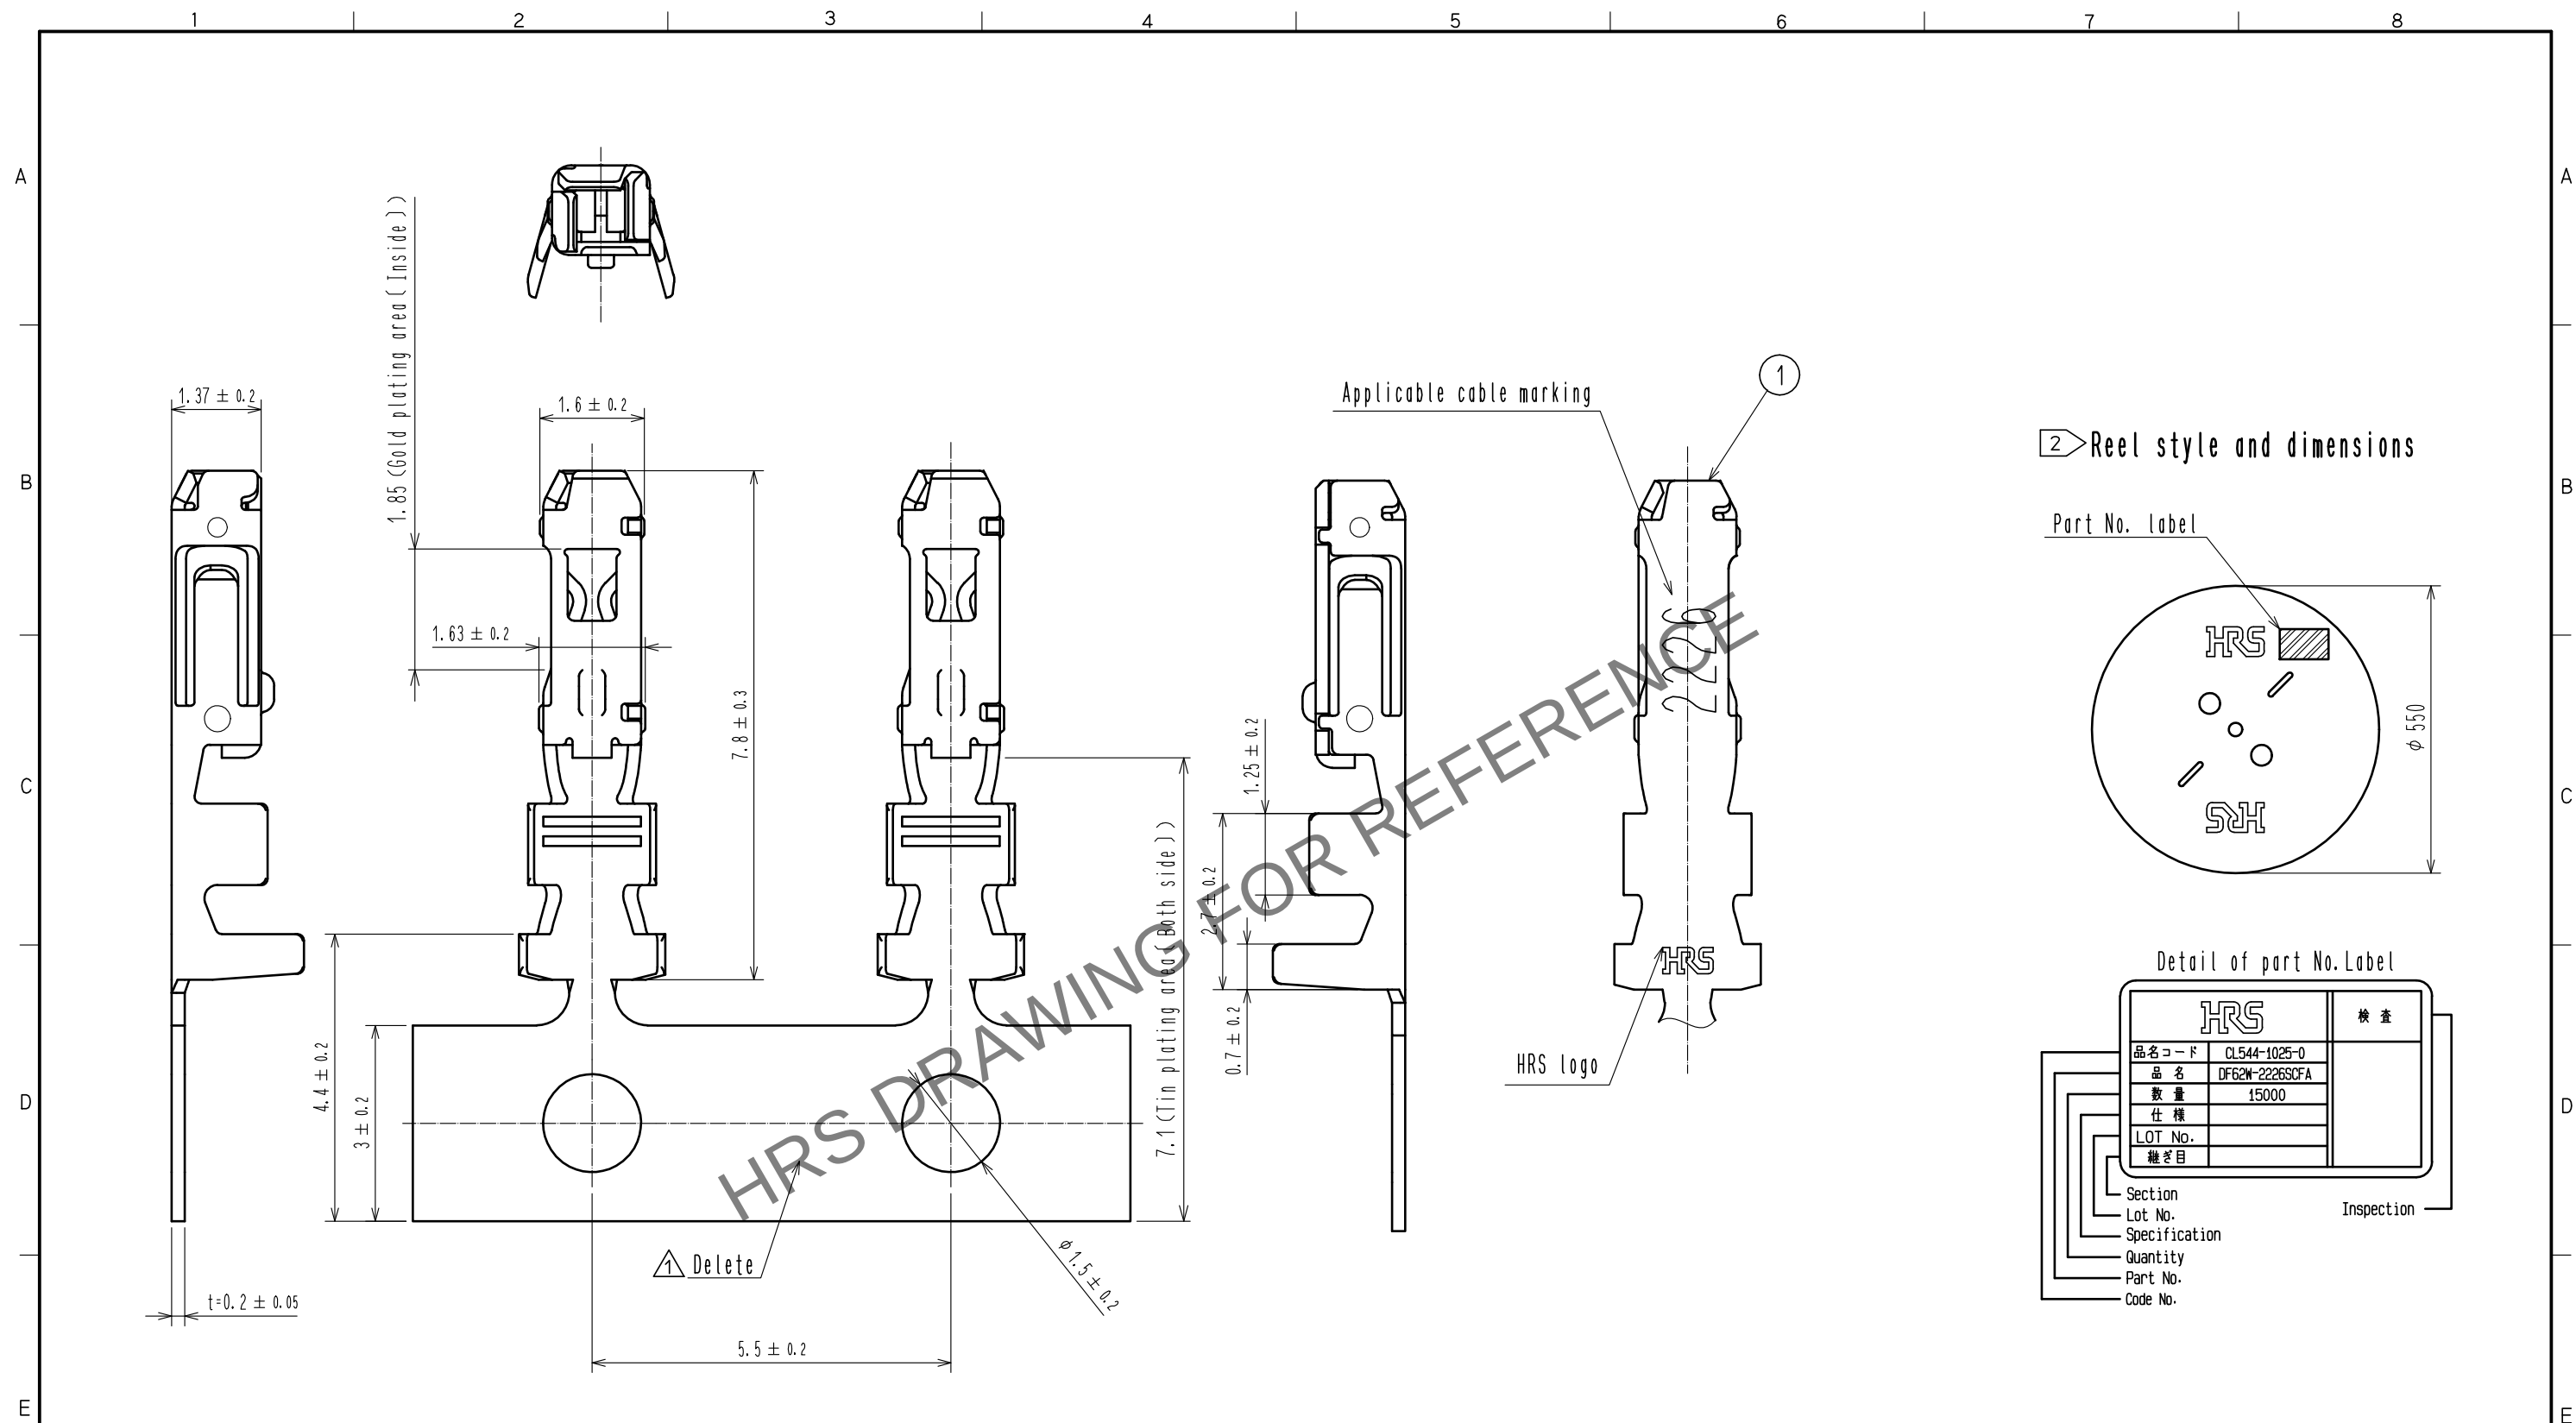




- Notes
1. 1RL : 15000 contacts.
 2. Style of reel and box are shown in figure.
 3. Up to 5 reels are packed up in one box.
 4. Please be sure to check the form of crimping using a cable when you adjust applicator.
 5. Always refer to the manuals below for operation of this product.
For Cable assembly / Cable assembly procedure ETAD-H0760
For Mating/Unmating / Operation manual ETAD-H0761

					1	Phosphor bronze		Contact area:Gold plating 0.2μm min Carrier/Barrel area:Tin plating 1μm min Others : Nickel plating 0.5 μm min		
NO.	MATERIAL		FINISH . REMARKS			NO.	MATERIAL		FINISH . REMARKS	
UNITS mm		SCALE 10 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED		CHECKED	DATE
				1	DIS-H-00001435		YK. YAMAGUCHI		TS. FUKUSHIMA	16. 03. 04
 HIROSE ELECTRIC CO., LTD.			APPROVED :KI. AKIYAMA		15. 12. 14		DRAWING NO. EDC-364715-00-00			
			CHECKED :TS. FUKUSHIMA		15. 12. 14		PART NO. DF62W-2226SCFA			
			DESIGNED :YK. YAMAGUCHI		15. 12. 11		CODE NO. CL544-1025-0-00			
			DRAWN :MI. SAKIMURA		15. 12. 11		 			