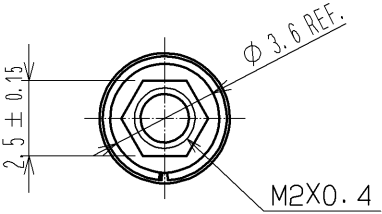
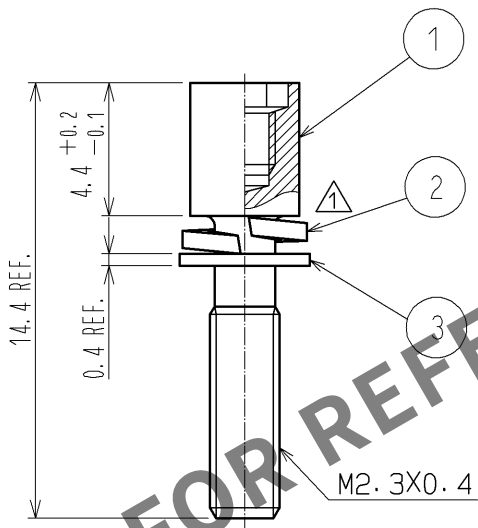
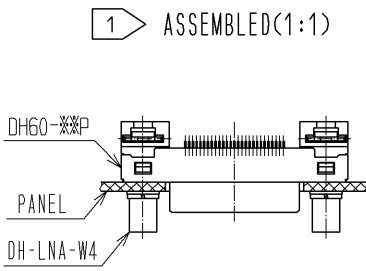



1		2		3		4													
A		B		C		D													
																			
NOTE 1		THIS PRODUCT IS ASSEMBLED TO A "DH60-**P". THE APPLICABLE PANEL THICKNESS IS FROM 0.9 TO 1.2mm.																	
2		THIS PRODUCT IS PACKED IN A BAG. (QUANTITY IN A BAG : 200pcs.)																	
																			
1		STEEL		OVER PLATING : NICKEL 5μm MIN UNDER PLATING : COPPER 1μm MIN		3		STEEL		OVER PLATING : NICKEL 5μm MIN UNDER PLATING : COPPER 1μm MIN									
NO.		MATERIAL		FINISH , REMARKS		NO.		MATERIAL		FINISH , REMARKS									
UNITS mm				SCALE 4 : 1		COUNT 2 1		DESCRIPTION OF REVISIONS DIS-E-003059		DESIGNED MO. SHIMOYAMA		CHECKED KN. ICHIKAWA		DATE 09.12.07					
 HIROSE ELECTRIC CO., LTD.		APPROVED : AO. SUZUKI		09.04.27		DRAWING NO.		EDC4-126896-00											
		CHECKED : MO. SHIMOYAMA		09.04.24		PART NO.		DH-LNA-W4											
		DESIGNED : TS. ITO		09.04.24		CODE NO.		CL244-0046-2-00											
		DRAWN : TS. ITO		09.04.24				2 1 1											
FORM HC0011-5-51														2		3		4	