
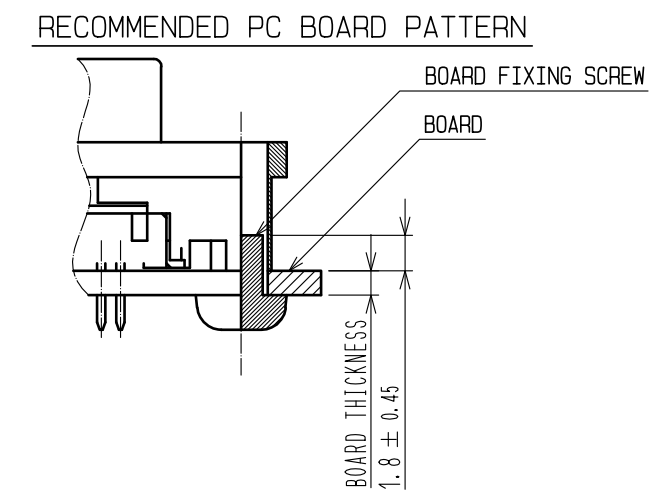
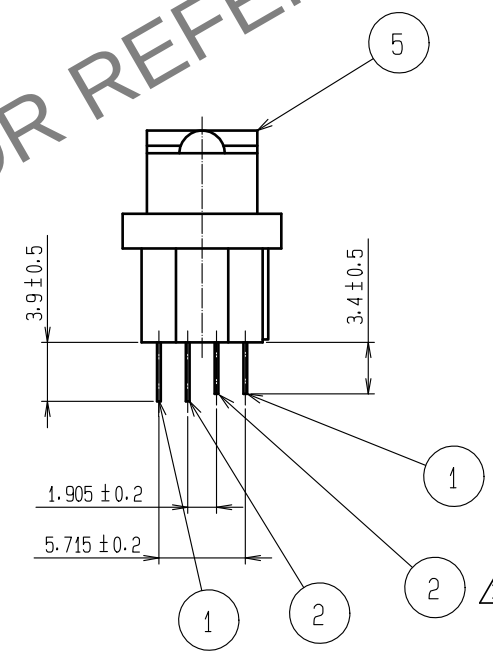
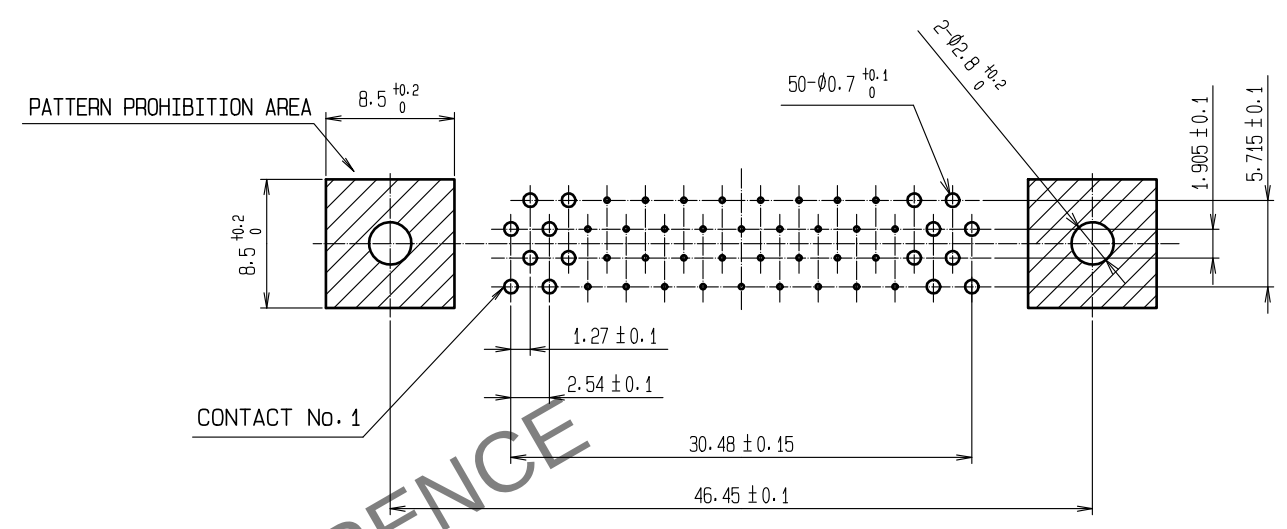
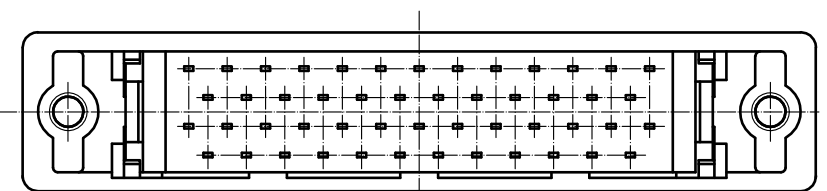
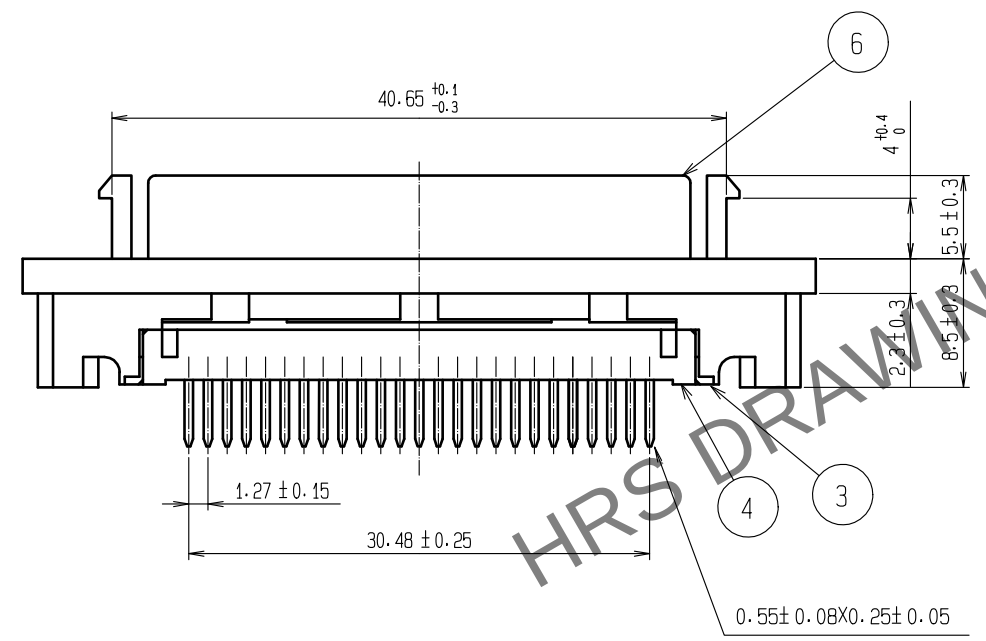


Oct.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

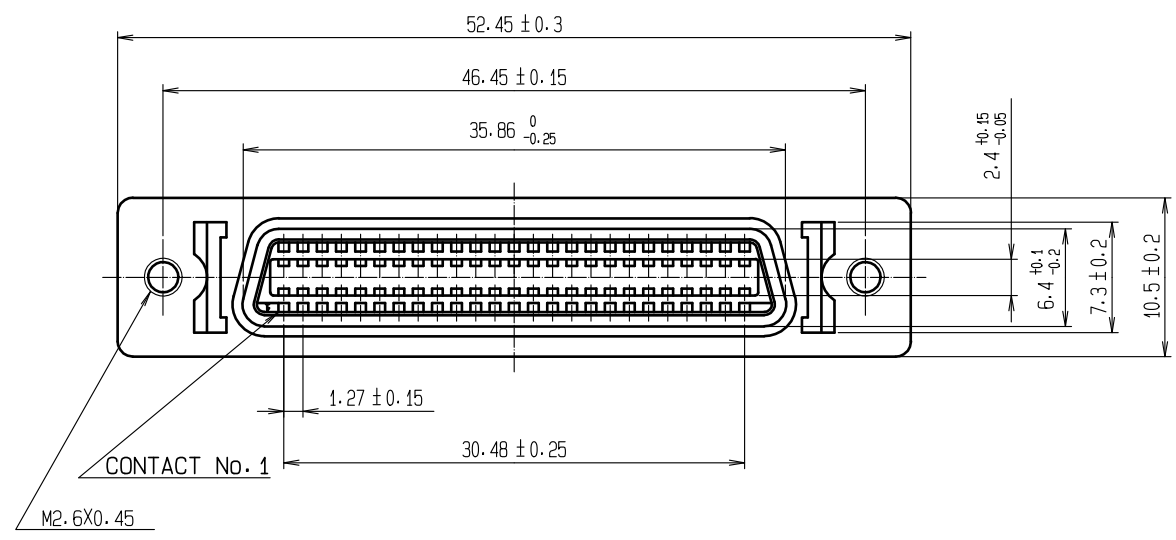

△ 1 PRODUCT - BOARD MOUNTED
△ NOTES 1 This product must be screwed to the board.
Please prepare the screws by the customer.
<SCREW REQUIREMENTS>
NOMINAL DIAMETER: M2.6 x 0.45
SCREW LENGTH : 1.8 ± 0.45 + BOARD thickness 't'

3	PBT	UL94V-0(BLACK)	6	STEEL	NICKEL PLATING
2	PHOSPHOR BRONZE	SELECTIVE GOLD PLATING 0.2μm min	5	ZINC ALLOY DIE CASTING	NICKEL PLATING
1	PHOSPHOR BRONZE	SELECTIVE GOLD PLATING 0.2μm min	4	PBT	UL94V-0(BLACK)
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT 2	DESCRIPTION OF REVISIONS DIS-E-00010989	DESIGNED KG. OKITA
		APPROVED : HO. MIWA	20050105	DRAWING NO.	EDC3-028511-01
		CHECKED : YH. ENAMI	20050105	PART NO.	DX20-50S(50)
		DESIGNED : TU. TANIGUCHI	20050105	CODE NO.	CL0230-0068-2-50
		DRAWN : TU. TANIGUCHI	20050105		
		DATE	20220908	CHECKED	MN. KENJO