


Oct.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

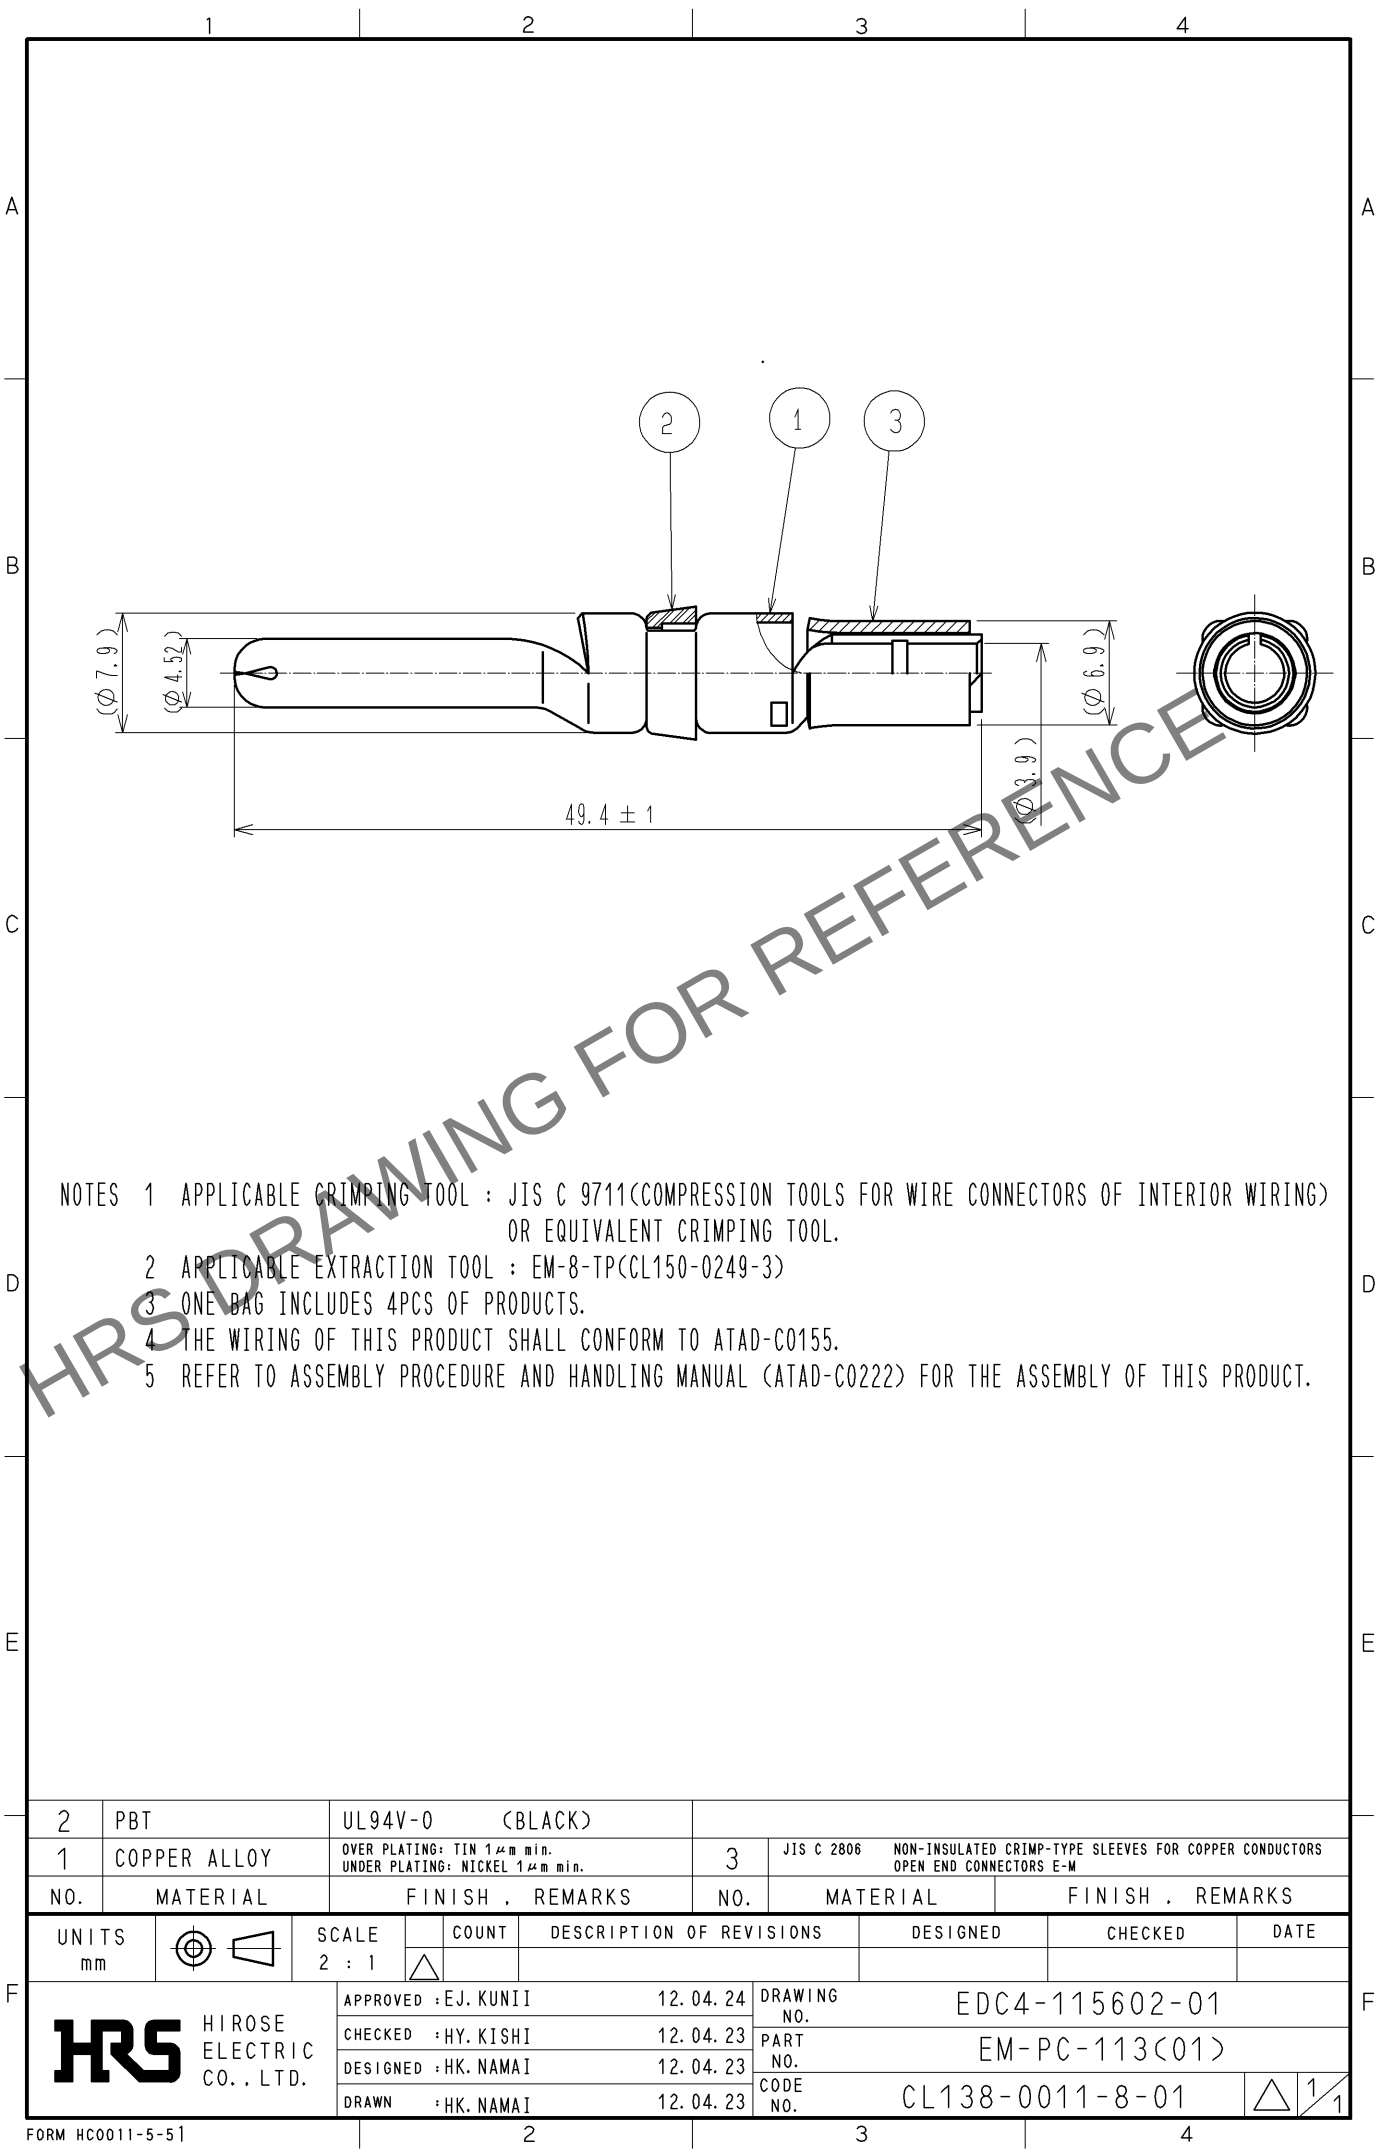

- NOTES 1 APPLICABLE CRIMPING TOOL : JIS C 9711(COMPRESSION TOOLS FOR WIRE CONNECTORS OF INTERIOR WIRING)
OR EQUIVALENT CRIMPING TOOL.
2 APPLICABLE EXTRACTION TOOL : EM-8-TP(CL150-0249-3)
3 ONE BAG INCLUDES 4PCS OF PRODUCTS.
4 THE WIRING OF THIS PRODUCT SHALL CONFORM TO ATAD-C0155.
5 REFER TO ASSEMBLY PROCEDURE AND HANDLING MANUAL (ATAD-C0222) FOR THE ASSEMBLY OF THIS PRODUCT.

2	PBT	UL94V-0 (BLACK)	
1	COPPER ALLOY	OVER PLATING: TIN 1μm min. UNDER PLATING: NICKEL 1μm min.	3 JIS C 2806 NON-INSULATED CRIMP-TYPE SLEEVES FOR COPPER CONDUCTORS OPEN END CONNECTORS E-M
NO.	MATERIAL	FINISH , REMARKS	NO. MATERIAL FINISH , REMARKS
UNITS mm		SCALE 2 : 1	COUNT
DESCRIPTION OF REVISIONS			
DESIGNED			
CHECKED			
DATE			
HIROSE ELECTRIC CO., LTD.		APPROVED : EJ. KUNII	12. 04. 24
		CHECKED : HY. KISHI	12. 04. 23
		DESIGNED : HK. NAMA I	12. 04. 23
		DRAWN : HK. NAMA I	12. 04. 23
		DRAWING NO.	EDC4-115602-01
		PART NO.	EM-PC-113(01)
		CODE NO.	CL138-0011-8-01