

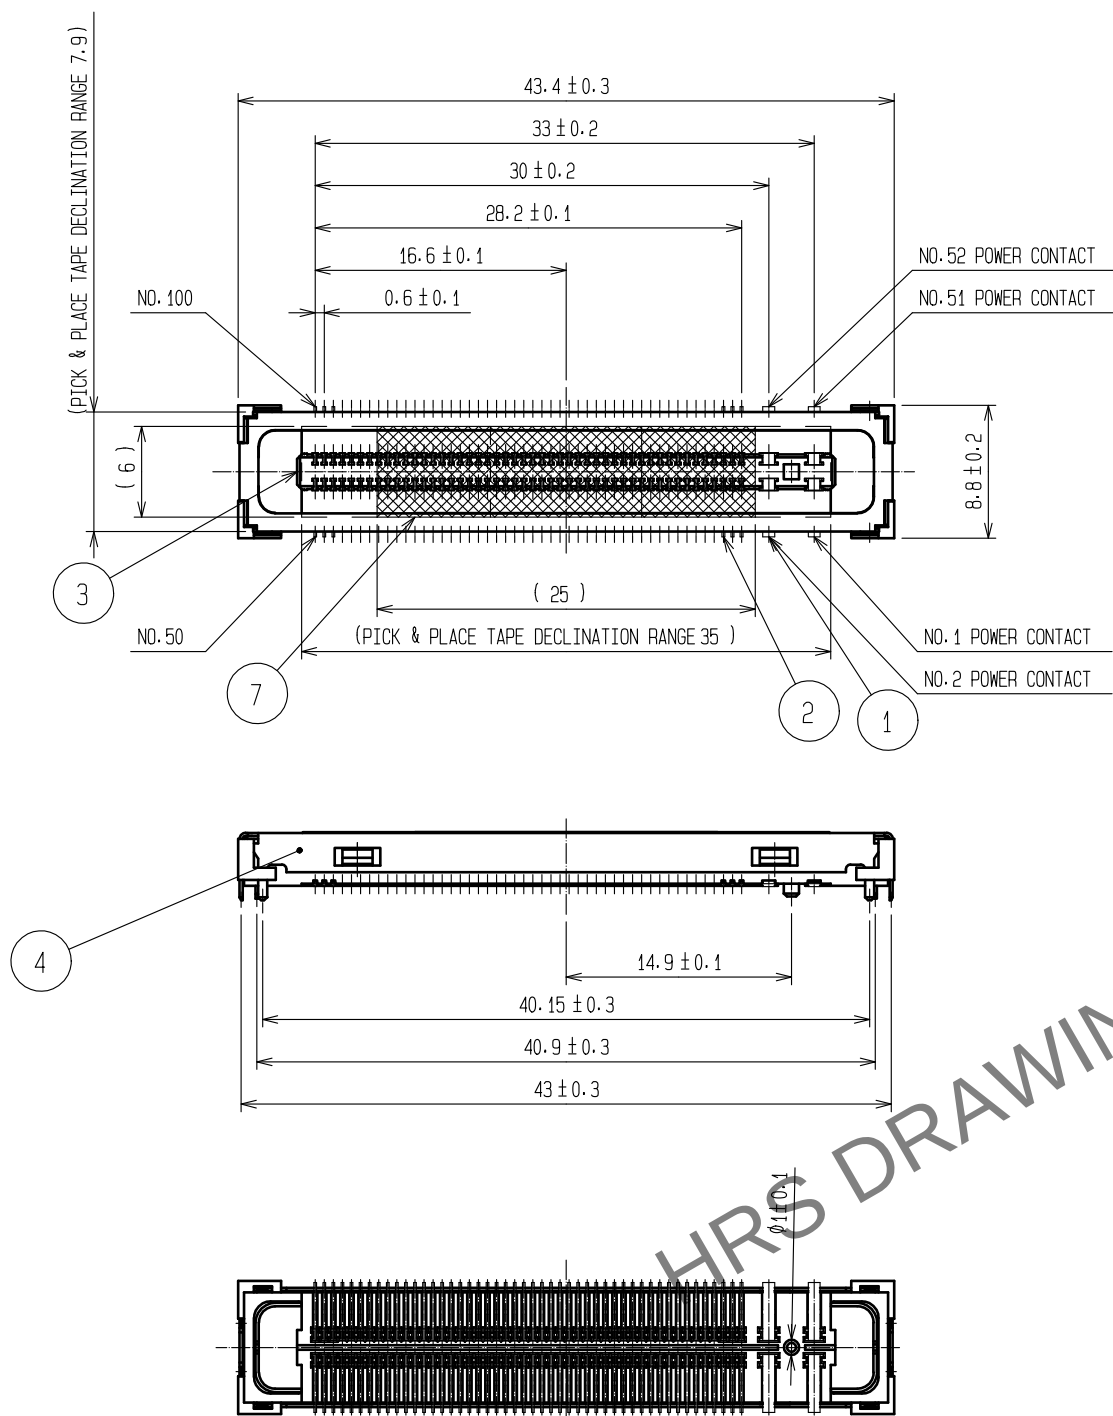


Oct.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

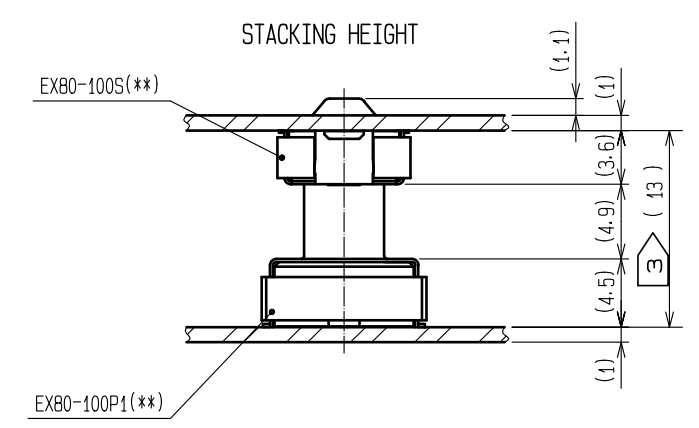


RECOMMENDED PC BOARD PATTERN(AUTOMATIC MOUNTING)
(COMPONENT MOUNTING SIDE:PCB t=1 MIN)

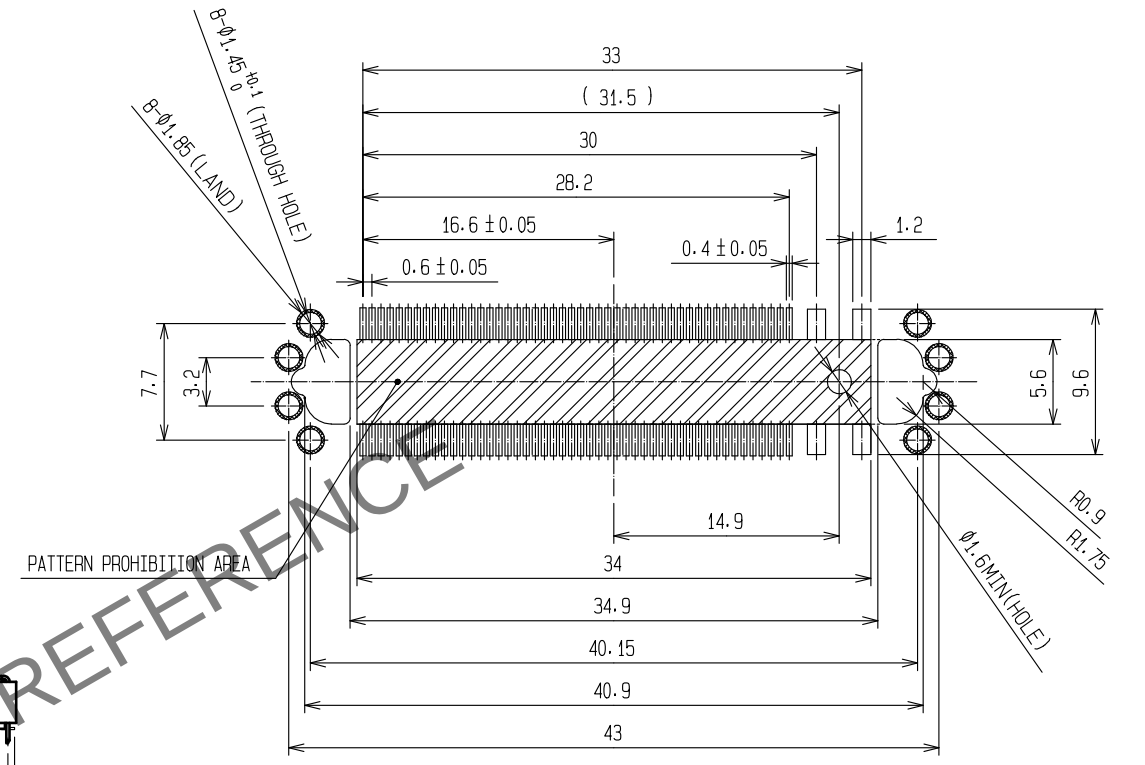

NOTE 1 CONTACT CO-PLANARITY TO BE MAX 0.15.
2 TOLERANCES TO BE ±0.1 UNLESS OTHERWISE SPECIFIED.
③ DEVICE DESIGN SHALL CONSIDER THE STACKED HEIGHT TO BE 14.5mm MAX.
(RECOMMENDED STACKED HEIGHT IS 13.7mm MAX.)
④ CONTACT AREA :GOLD PLATING 0.2μm min
LEAD AREA :GOLD PLATING 0.03μm min
UNDER :NICKEL PLATING 2μm min
⑤ DIP AREA :TIN PLATING 1μm min
UNDER :NICKEL PLATING 0.6μm min

			7	Pick & Place tape	
3	LCP	UL94V-0, Black	6	PS	Milky-white
2	Phosphor Bronze	④	5	PS	Milky-white
1	Copper Alloy	④	4	Stainless Steel	⑤
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
UNITS mm		SCALE 2 : 1	COUNT 1	DESCRIPTION OF REVISIONS DIS-E-00004011	DESIGNED MO. SHIMOYAMA
		APPROVED : MN. KENJO	20200407	DRAWING NO.	EDC-122485-70-00
		CHECKED : TU. TANIGUCHI	20200407	PART NO.	EX80-100S(70)
		DESIGNED : KIM JAEHYEON	20200407	CODE NO.	CL0232-0592-2-70
		DRAWN : DS. HIROWATARI	20200407		
		DATE	20210120	CHECKED	TU. TANIGUCHI

EX80-100S PACKAGING FIGURE

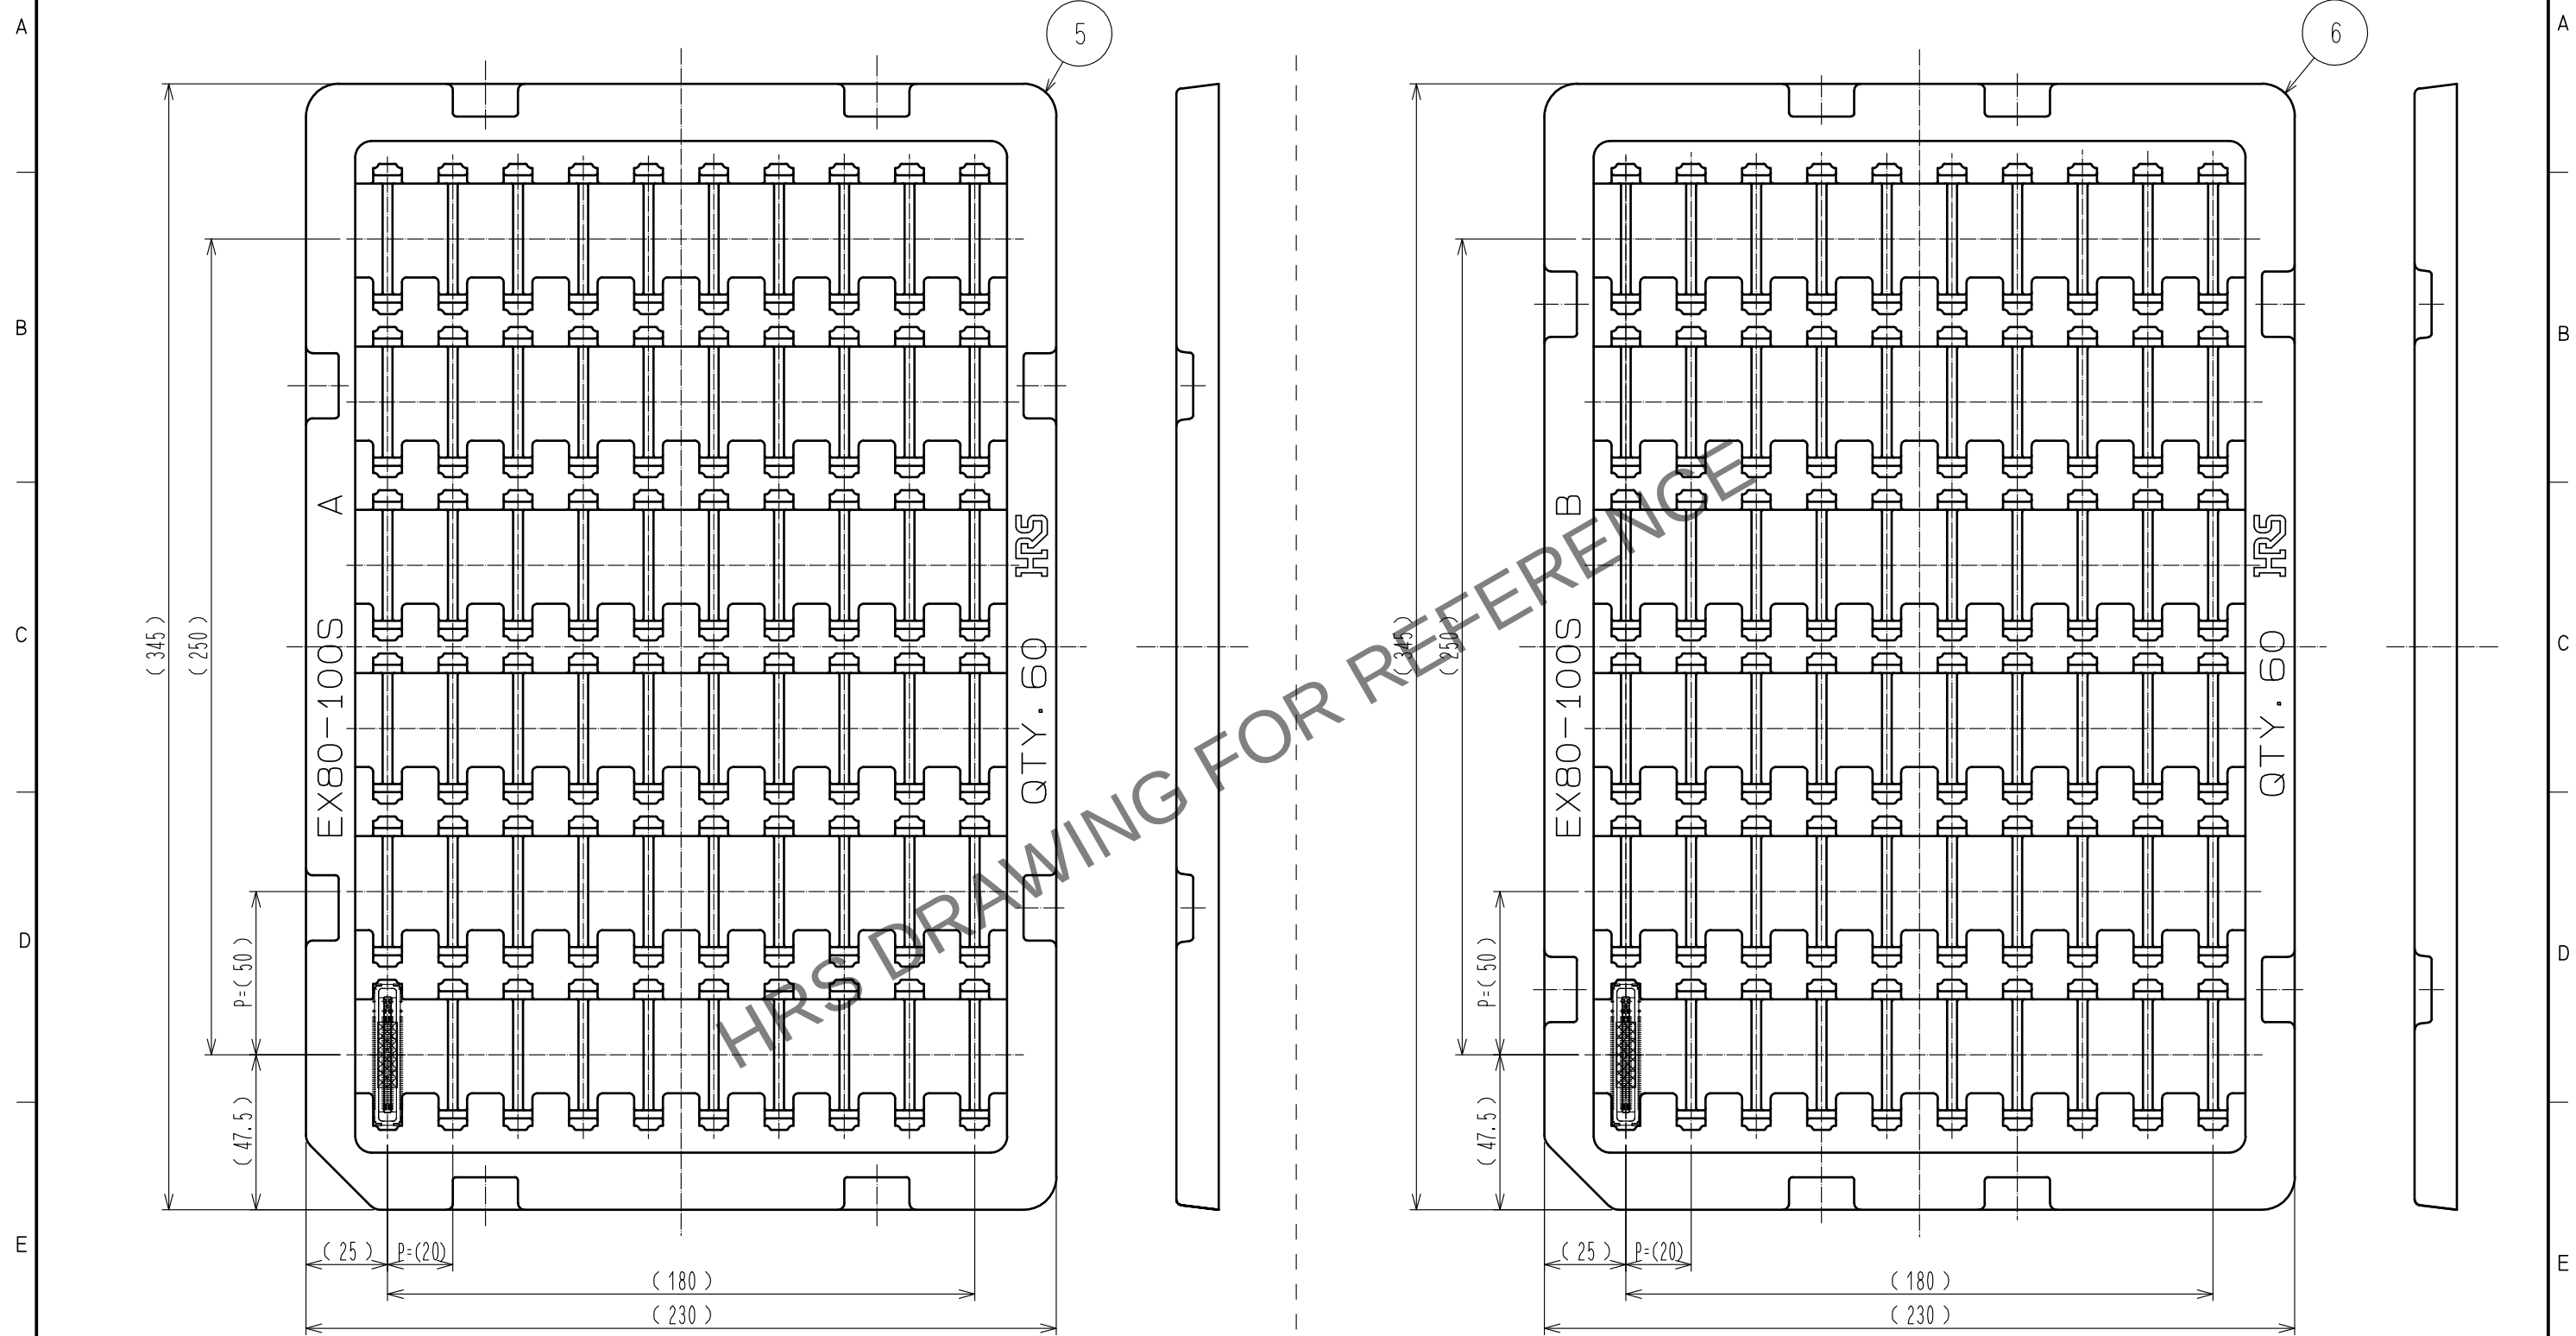

HRS

DRAWING NO.	EDC-122485-70-00
PART NO.	EX80-100S(70)
CODE NO.	CL0232-0592-2-70

1/2