


Apr.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

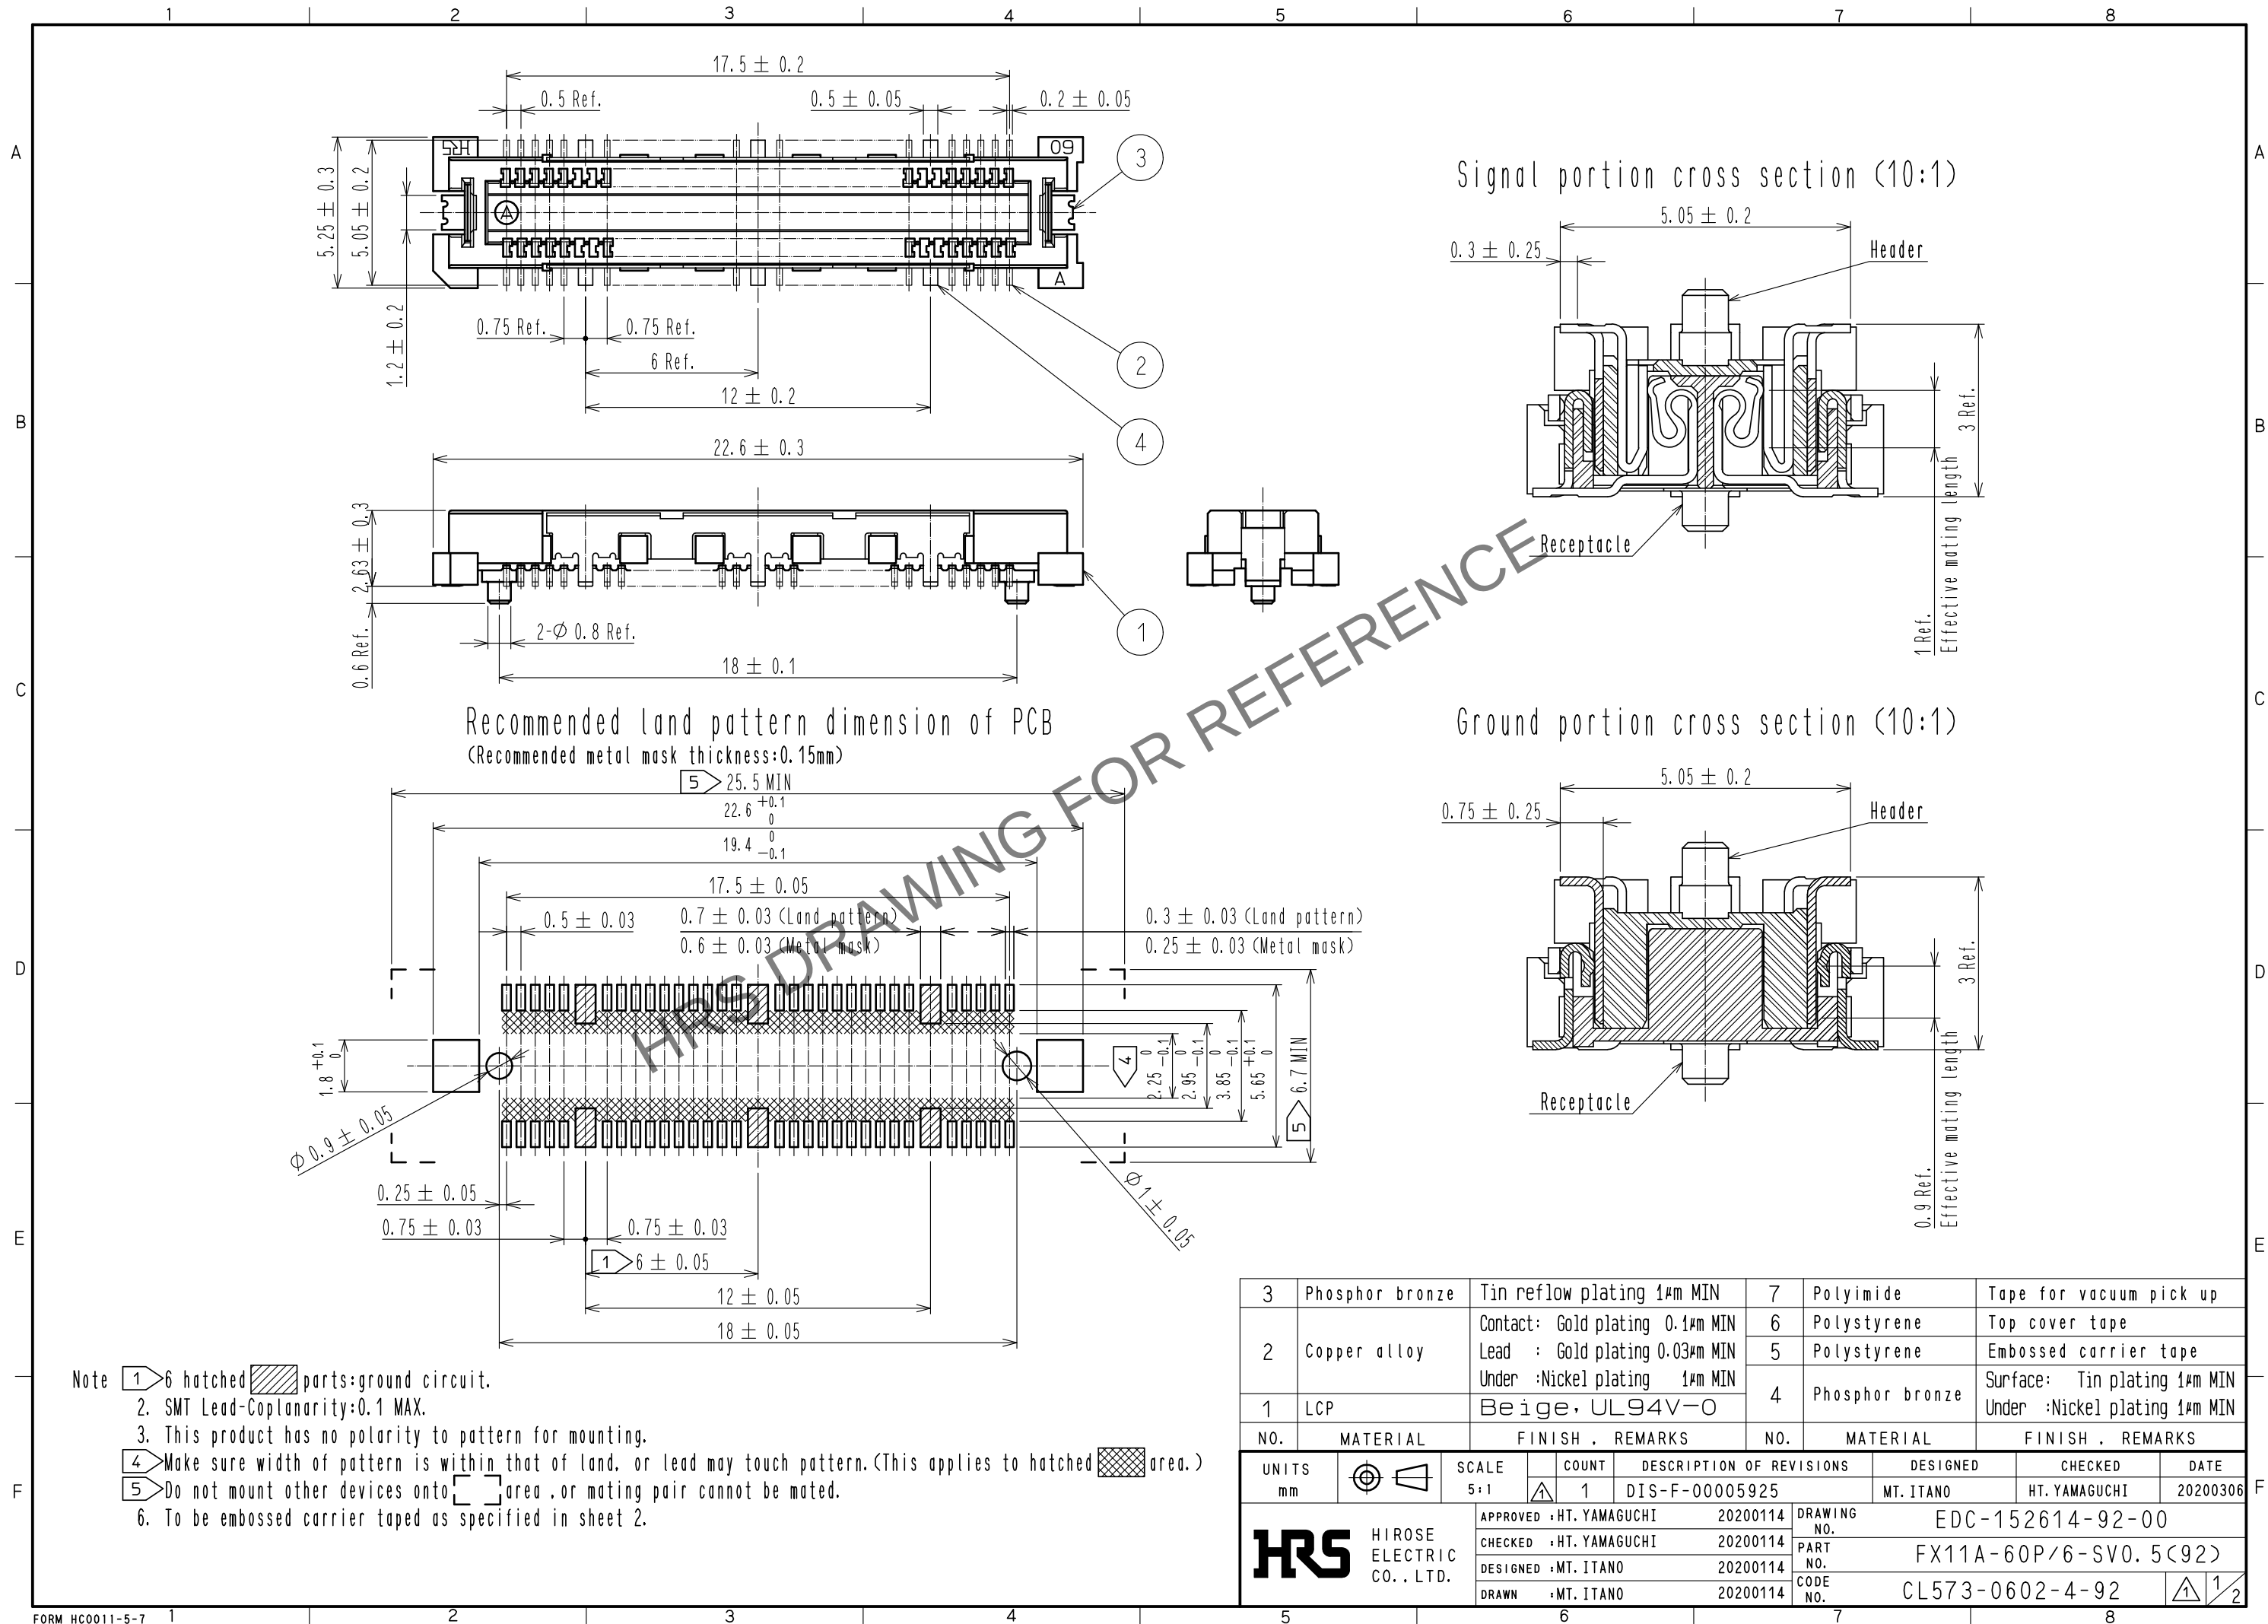

3	Phosphor bronze	Tin reflow plating 1μm MIN	7	Polyimide	Tape for vacuum pick up
2	Copper alloy	Contact: Gold plating 0.1μm MIN Lead : Gold plating 0.03μm MIN Under : Nickel plating 1μm MIN	6	Polystyrene	Top cover tape
1	LCP	Beige, UL94V-0	5	Polystyrene	Embossed carrier tape
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
UNITS mm		SCALE 5:1	COUNT 1	DESCRIPTION OF REVISIONS DIS-F-00005925	DESIGNED MT. ITANO
HIROSE ELECTRIC CO., LTD.		APPROVED : HT. YAMAGUCHI	20200114	DRAWING NO. EDC-152614-92-00	
		CHECKED : HT. YAMAGUCHI	20200114	PART NO. FX11A-60P/6-SV0.5(92)	
		DESIGNED : MT. ITANO	20200114	CODE NO. CL573-0602-4-92	
		DRAWN : MT. ITANO	20200114		
				DATE 20200306	


Apr.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

Drawing for packing (Free)

The direction of pulling out





△ Change connector orientation

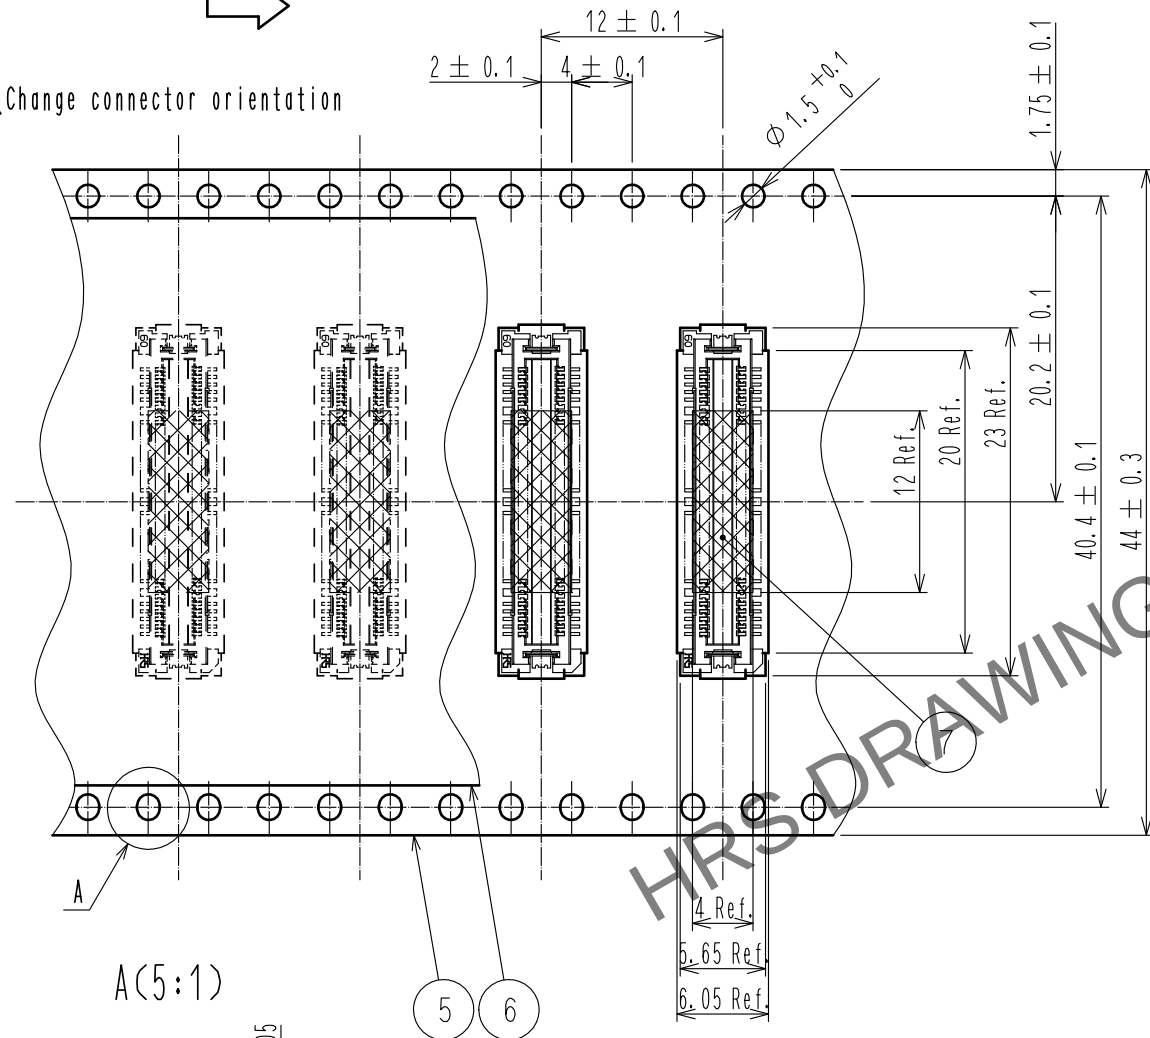

2.98 Ref.
0.4 Ref.

0.9 Ref.

Reeled dimension (Free)

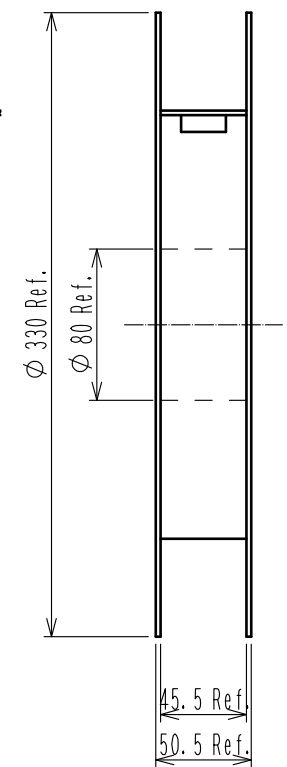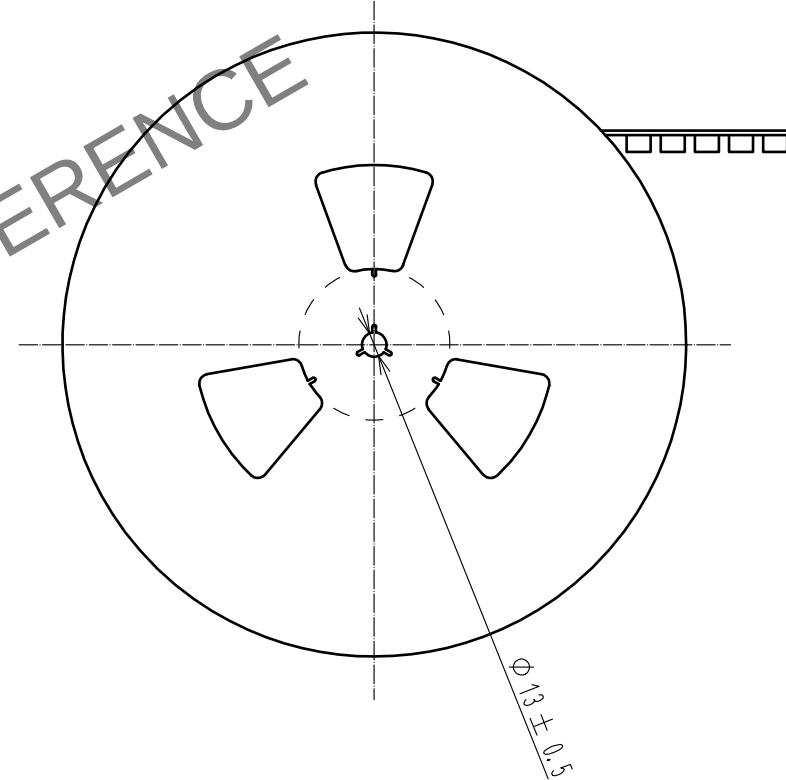

NOTE

- 1 Reel:1000 Connectors.
- Minimum 10 compartments from both reel ends remain empty.
- This product has no polarity to tape and reel packaging.
- Remove the vacuum pickup tape(No.7) after mounting the connector.

HRS

DRAWING NO.	EDC-152614-92-00
PART NO.	FX11A-60P/6-SV0. 5(92)
CODE NO.	CL573-0602-4-92

1/2