

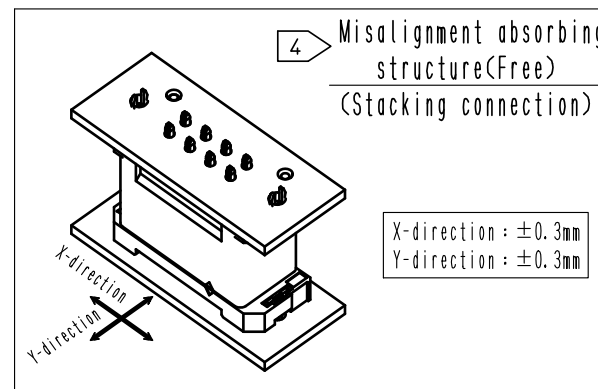
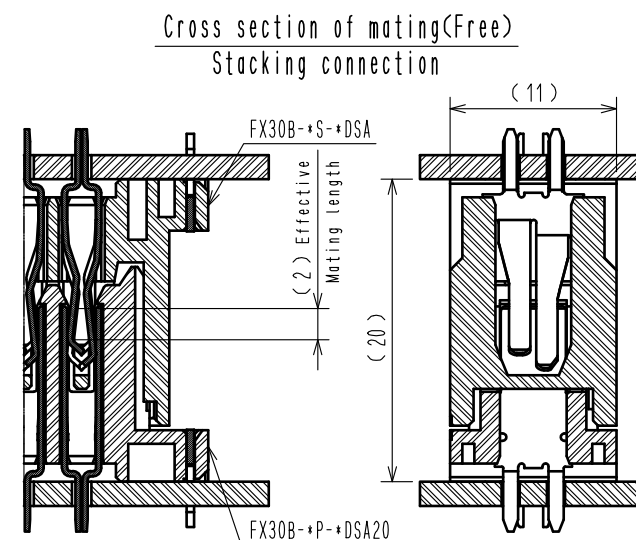
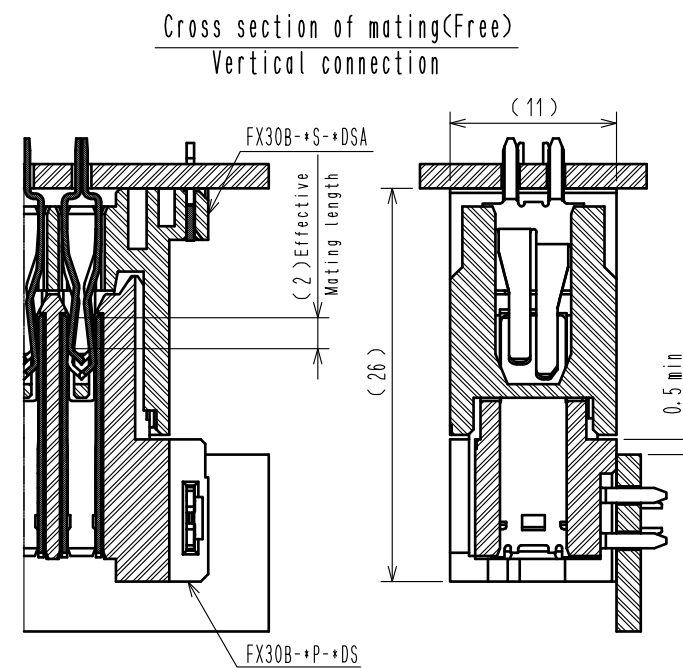


Nov.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

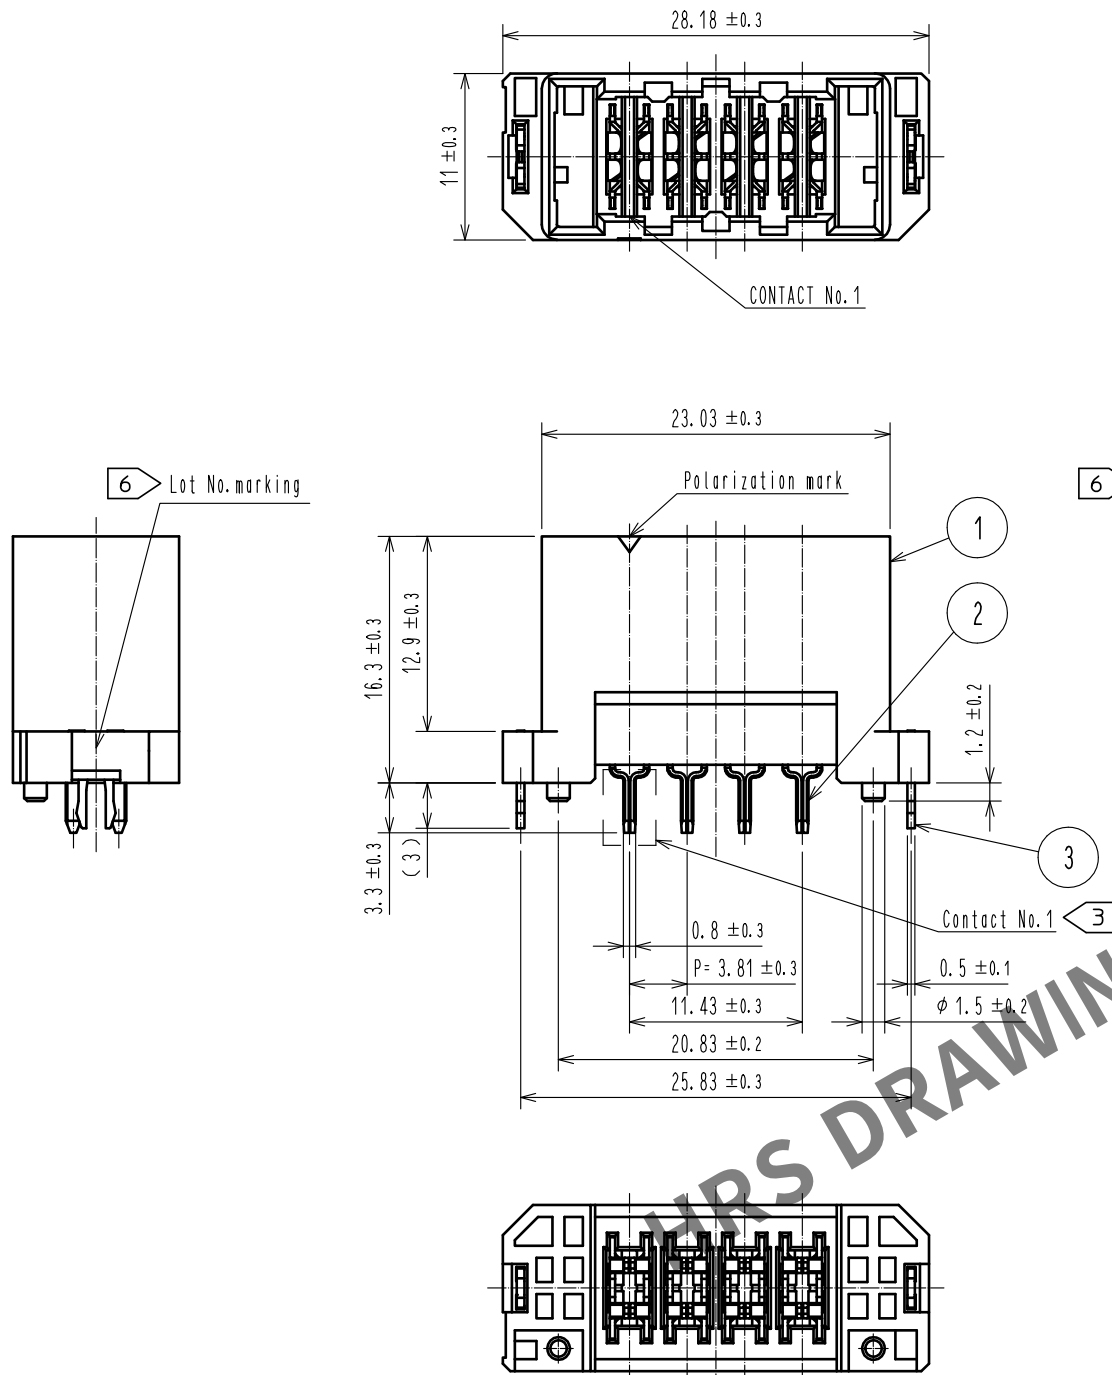

- Note
- 1 This product is packaged in tray. (35pcs/tray)
  - 2 Blemish and hit mark can be occurred through out the manufacturing process which doesn't affect quality level. Also, black spot could be observed on The surface of housing.
  - 3 For the contact No., adjacent two pairs of leads placed back-to-back (4 leads in total) compose one line.
  - 4 Misalignment absorbing range: ±0.3mm max.
  - 5 The dimension in parentheses are for references.
  - 6 Lot No. is indicated at either one of the position as shown.
  - 7 UL (File No. E52653)  
C-UL (File No. E52653)  
TUV (Certificate No. R50275872) authorization article.

|                                                                                                                 |              |                                                                                       |  |                |                                                                                       |                            |                                            |                                                                                       |                         |                          |                  |
|-----------------------------------------------------------------------------------------------------------------|--------------|---------------------------------------------------------------------------------------|--|----------------|---------------------------------------------------------------------------------------|----------------------------|--------------------------------------------|---------------------------------------------------------------------------------------|-------------------------|--------------------------|------------------|
| 2                                                                                                               | COPPER ALLOY | CONTACT AREA:GOLD-PLATING 0.1 μm                                                      |  |                | 4                                                                                     | POLYSTYRENE                |                                            |                                                                                       |                         |                          |                  |
|                                                                                                                 |              | LEAD AREA:TIN-PLATING 1.0 μm                                                          |  |                |                                                                                       |                            |                                            |                                                                                       |                         |                          |                  |
|                                                                                                                 |              | UNDER PLATING:NICKEL 1.0 μm                                                           |  |                |                                                                                       |                            | TIN-PLATING 3.0 μm                         |                                                                                       |                         |                          |                  |
| 1                                                                                                               | POLYAMIDE    | BLACK UL94V-0                                                                         |  |                | 3                                                                                     | PHOSPHOR BRONZE            | UNDER PLATING:NICKEL 1.0 μm                |                                                                                       |                         |                          |                  |
| NO.                                                                                                             | MATERIAL     | FINISH . REMARKS                                                                      |  |                | NO.                                                                                   | MATERIAL                   | FINISH . REMARKS                           |                                                                                       |                         |                          |                  |
| UNITS<br>mm                                                                                                     |              |  |  | SCALE<br>2 : 1 |  | COUNT<br>1                 | DESCRIPTION OF REVISIONS<br>DIS-F-00006019 |                                                                                       | DESIGNED<br>AK. IWAHORI | CHECKED<br>HT. YAMAGUCHI | DATE<br>20200406 |
|  HIROSE ELECTRIC CO., LTD. |              | APPROVED : HS. OKAWA                                                                  |  | 20130313       |                                                                                       | DRAWING NO. EDC3-347274-00 |                                            |                                                                                       |                         |                          |                  |
|                                                                                                                 |              | CHECED : KI. HIROKAWA                                                                 |  | 20130312       |                                                                                       | PART NO. FX30B-4S-3. 81DSA |                                            |                                                                                       |                         |                          |                  |
|                                                                                                                 |              | DESIGNED : DK. AIMOTO                                                                 |  | 20130311       |                                                                                       | CODE NO. CL570-3502-7-00   |                                            |                                                                                       |                         |                          |                  |
|                                                                                                                 |              | DRAWN : DK. AIMOTO                                                                    |  | 20130311       |                                                                                       |                            |                                            |                                                                                       |                         |                          |                  |
|                                                                                                                 |              |                                                                                       |  |                |                                                                                       |                            |                                            |  |                         | 1/2                      |                  |

