


Nov.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


TO

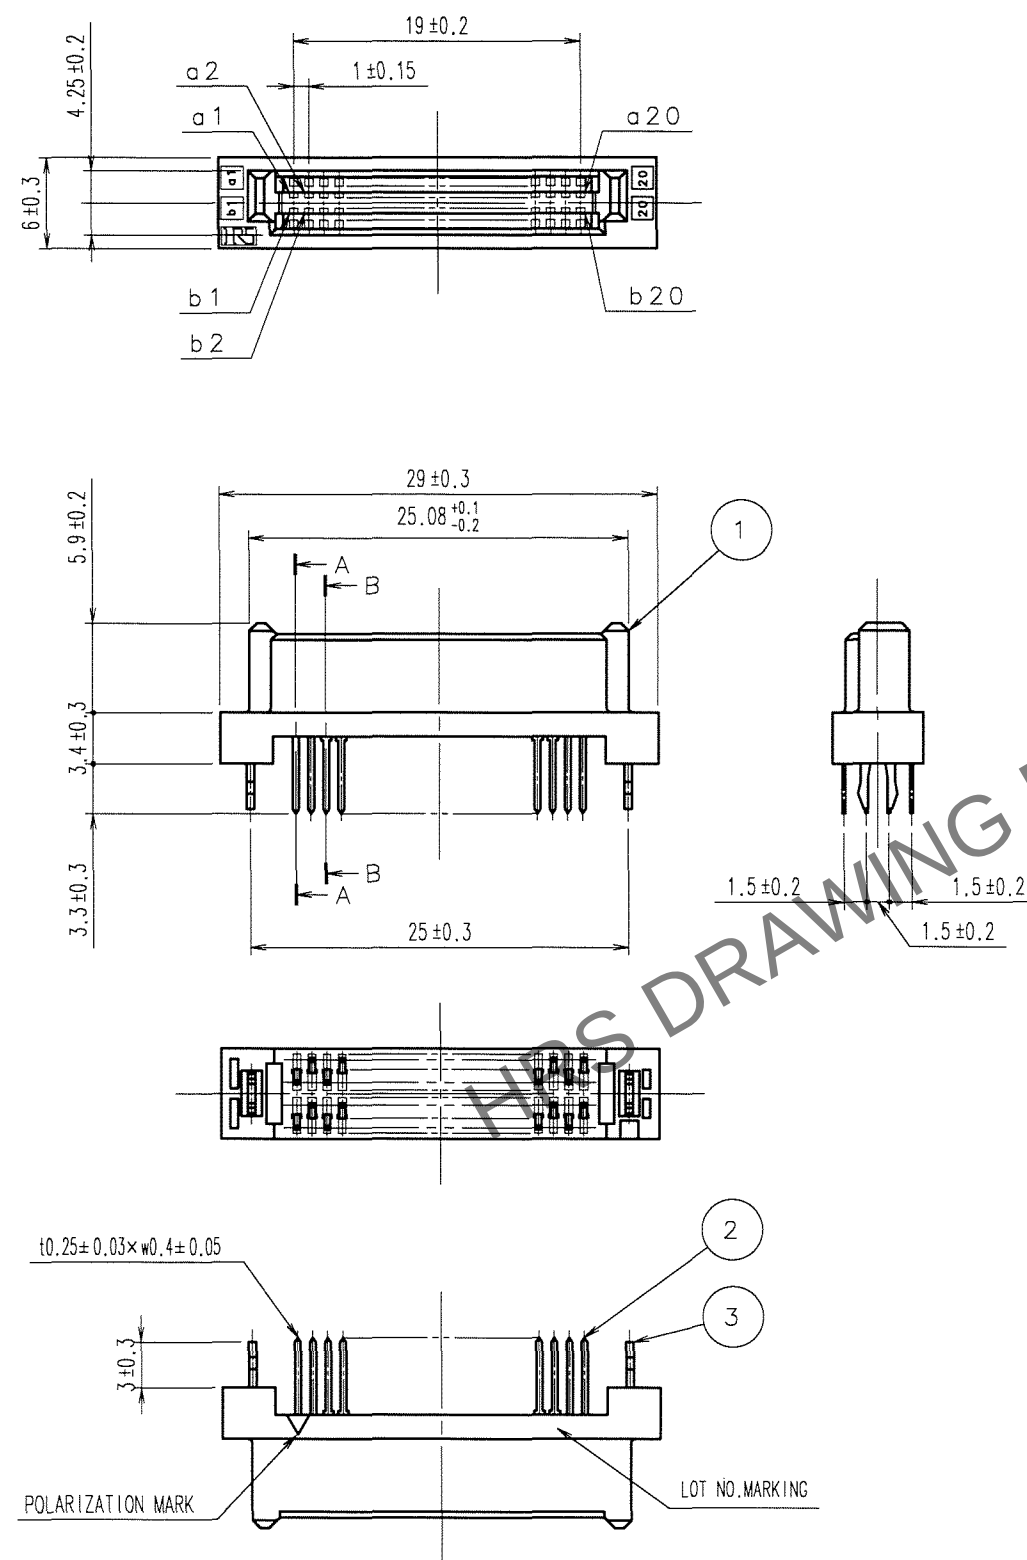

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△				..	△				..
△				..	△				..
△				..	△				..

RECOMMENDED PC BOARD HOLE PATTERN (MOUNTING SIDE)


APPLICABLE BOARD THICKNESS, 1.6

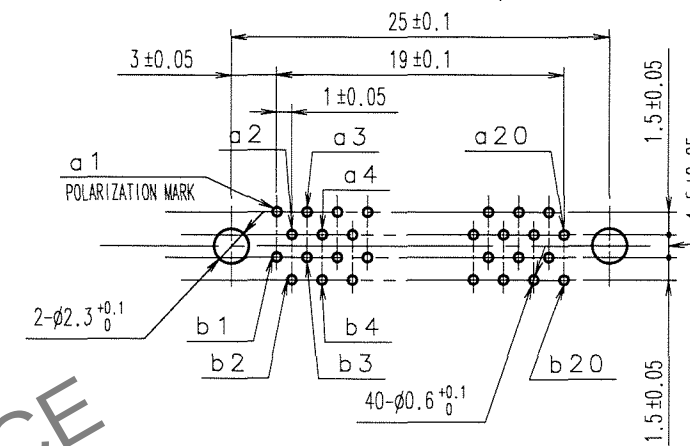


CONTACT SEQUENCE

SEQUENCE	PIN NO.
1	a1, a2, a19, a20 b1, b2, b19, b20
2	a3~a18 b3~b18

A-A (5:1)

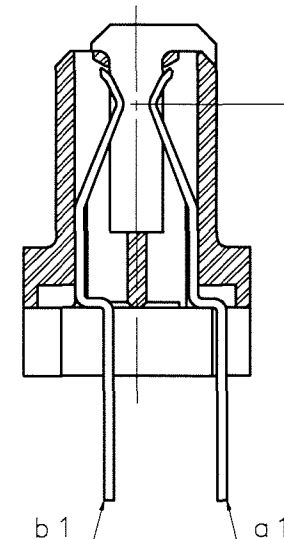

B-B (5:1)

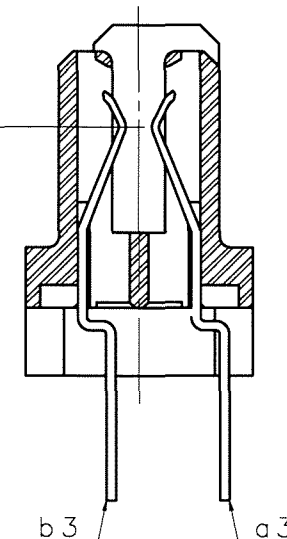

3	PHOSPHOR BRONZE	TIN-PLATING	2	PHOSPHOR BRONZE	CONTACT AREA : GOLD $0.1 \mu\text{m min.}$
1	POLYAMIDE	BEIGE UL94V-0			LEAD AREA : TIN-PLATING $1.2 \mu\text{m min.}$
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	UNDER PLATING : NICKEL $1 \mu\text{m min.}$
CODE NO. (OLD)	CL		DRAWN	DESIGNED	CHECKED
			A. SUZUKAWA	M. Nakamura	M. Ozawa
			'06.10.06	'06.10.06	'06.10.06
				H. Okawa	
SCALE	2 : 1	DRAWING NO.	EDC3-151519-21	PART NO.	FX5-40S2A-DSAL (71)
UNITS	mm	HIROSE ELECTRIC CO., LTD		CODE NO.	CL575-0125-0-71