


Oct.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


TO

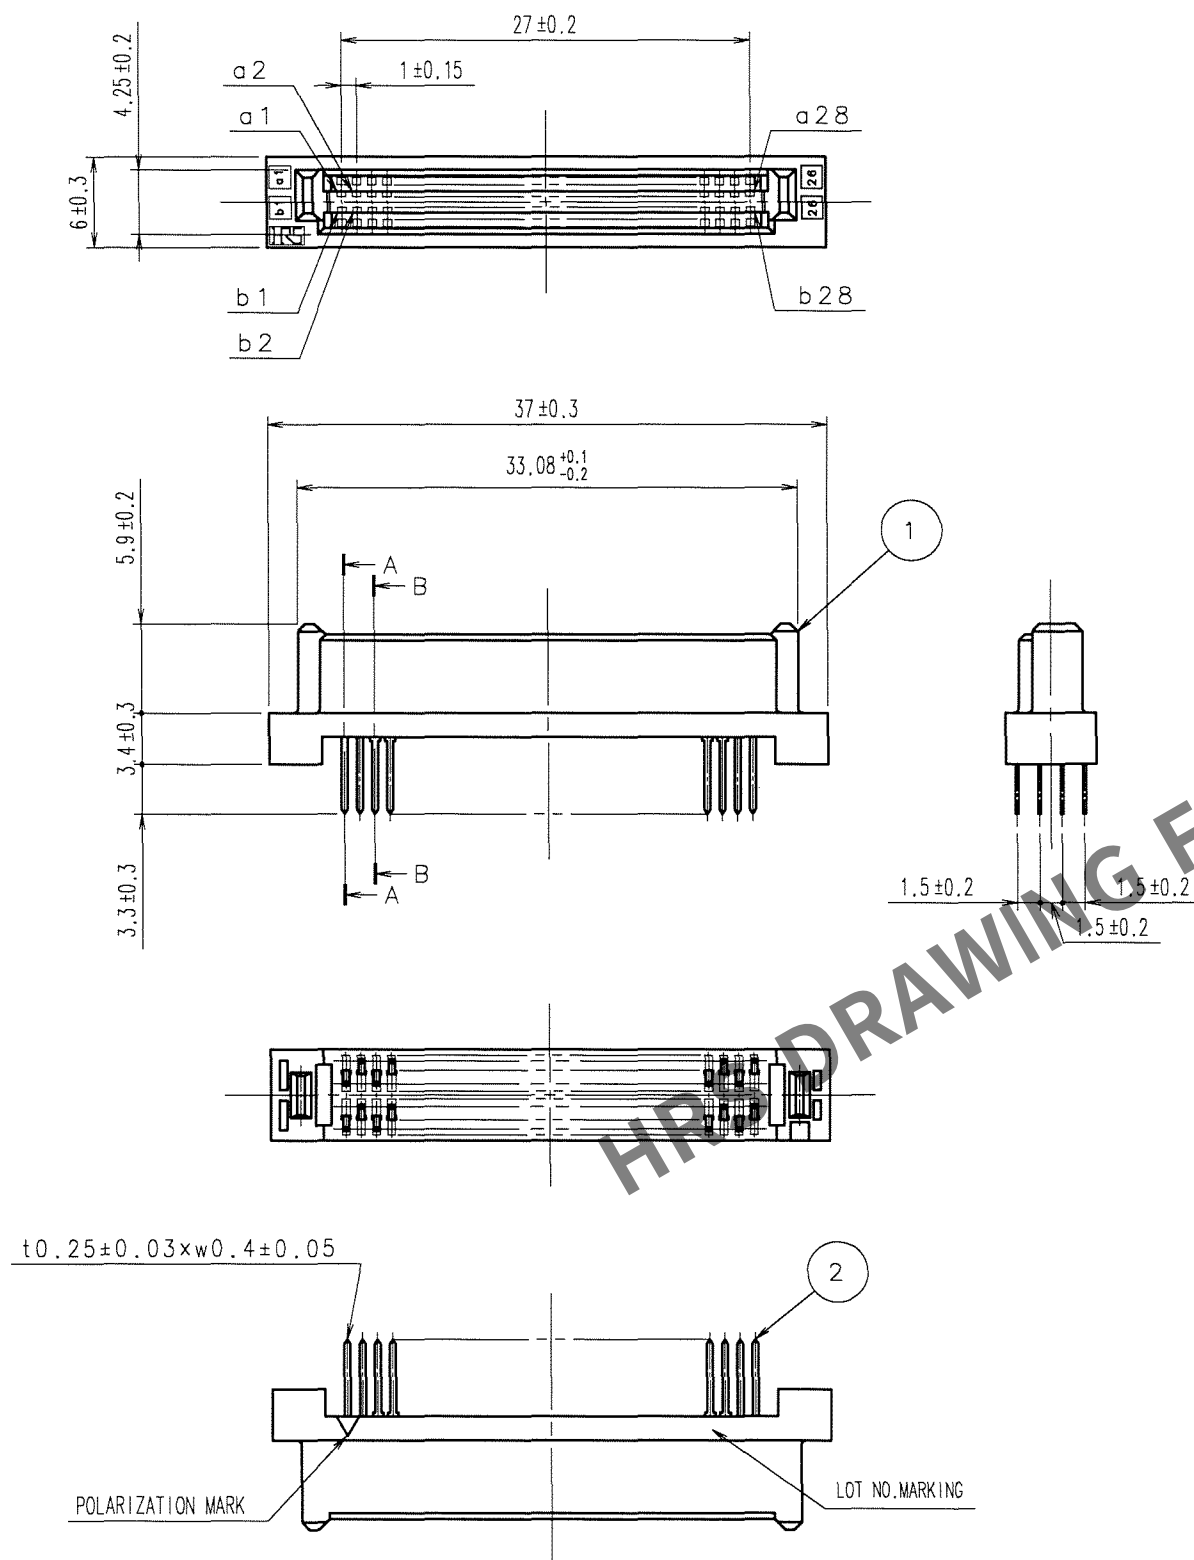

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△				..	△				..
△				..	△				..
△				..	△				..

RECOMMENDED PC BOARD HOLE PATTERN (MOUNTING SIDE)


APPLICABLE BOARD THICKNESS, 1.6

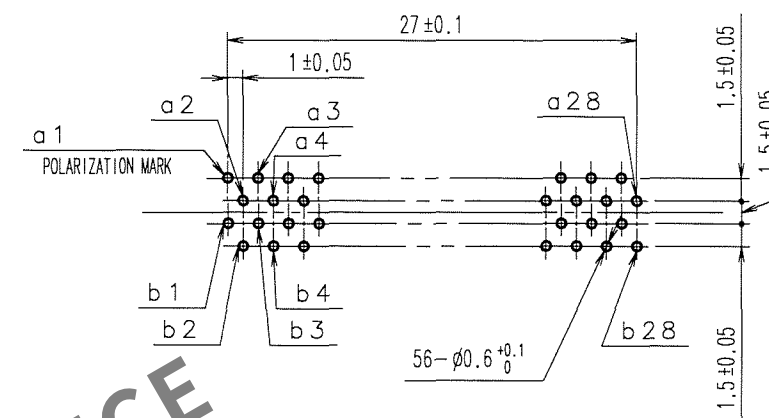


CONTACT SEQUENCE

SEQUENCE	PIN NO.
1	a1, a2, a27, a28 b1, b2, b27, b28
2	a3~a26 b3~b26

A-A (5:1)

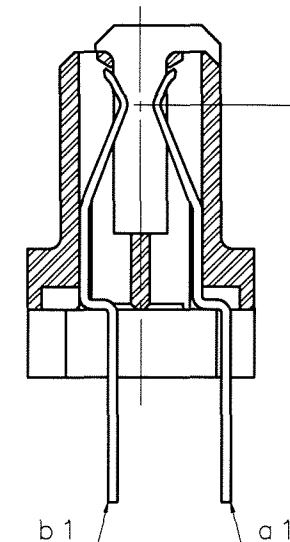

B-B (5:1)

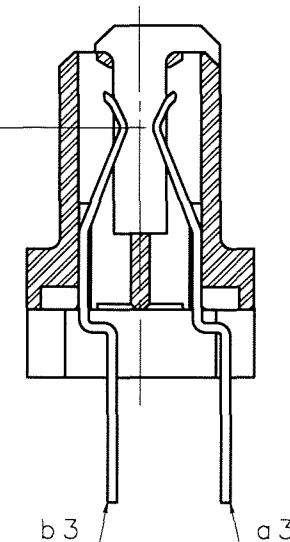

1	POLYAMIDE	BEIGE UL94V-0	2	PHOSPHOR BRONZE	CONTACT AREA : GOLD $0.1 \mu\text{m min.}$ LEAD AREA : TIN-PLATING $1.2 \mu\text{m min.}$ UNDER PLATING : NICKEL $1 \mu\text{m min.}$
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD) CL	DRAWN A. SUZUKAWA '06.10.04	DESIGNED K. Nakamura '06.10.04	CHECKED K. Ogawa '06.10.04	APPROVED H. Okawa '06.10.04	RELEASED ..
SCALE 2 : 1	DRAWING NO. EDC3-151416-21	PART NO. FX5-56S2A-DSA(71)	UNITS mm	CODE NO. CL575-0107-8-71	1/1

HS

HIROSE ELECTRIC CO., LTD