



Dec.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

TO
PCK

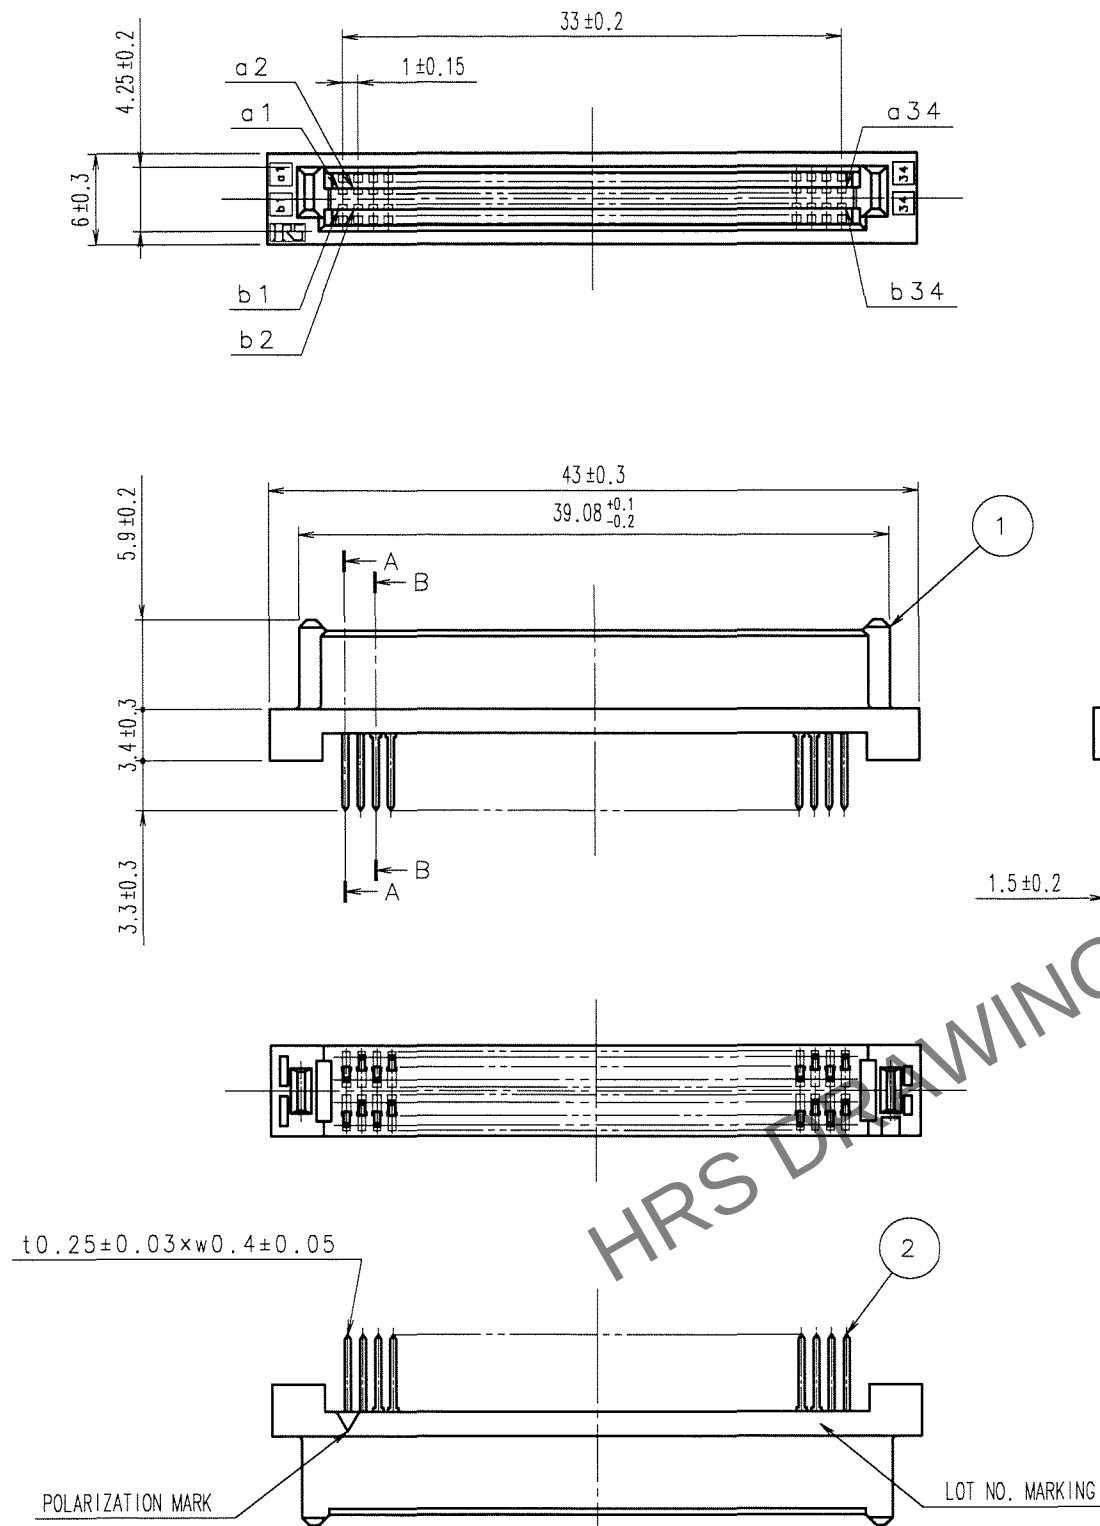

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					△				
△					△				
△					△				

RECOMMENDED PC BOARD HOLE PATTERN(MOUNTING SIDE)
APPLICABLE BOARD THICKNESS, 1.6

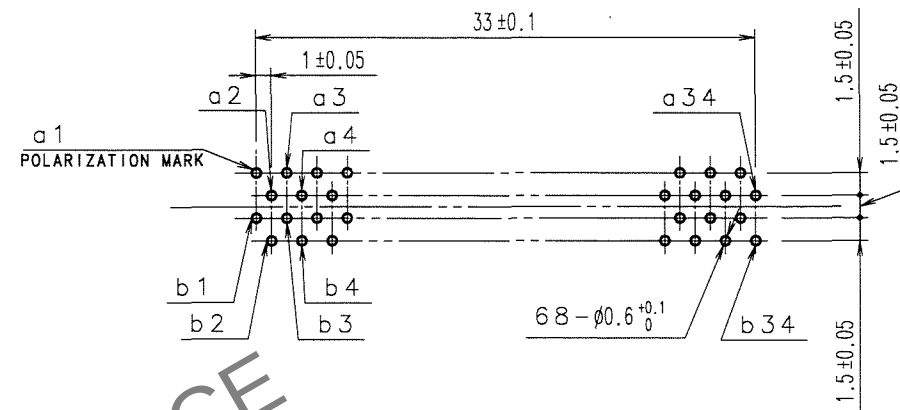


CONTACT SEQUENCE

SEQUENCE	PIN No.
1	a1, a2, a33, a34 b1, b2, b33, b34
2	a3~a32, b3~b32

A-A(5:1)

B-B(5:1)

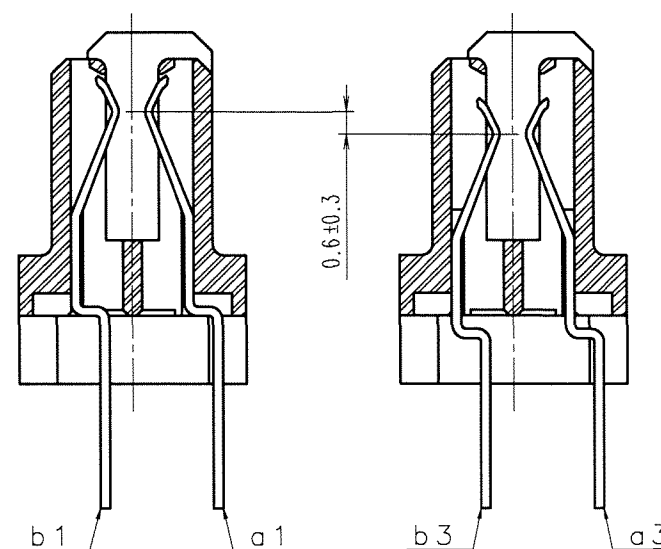

1	POLYAMIDE	BEIGE UL94V-0	2	PHOSPHOR BRONZE	CONTACT AREA : GOLD $0.1 \mu\text{m min.}$ LEAD AREA : TIN-PLATING $1.2 \mu\text{m min.}$ UNDER PLATING : NICKEL $1 \mu\text{m min.}$
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO.(OLD) CL	DRAWN A.SUZUKAWA 06.10.17	DESIGNED H. Okawa 06.10.17	CHECKED H. Okawa 06.10.17	APPROVED H. Okawa 06.10.17	RELEASED
SCALE 2 : 1	DRAWING NO. EDC3-151417-21	PART NO. FX5-68S2A-DSA(71)	CODE NO. CL575-0108-0-71	1/1	
UNITS mm	HRS HIROSE ELECTRIC CO., LTD.				